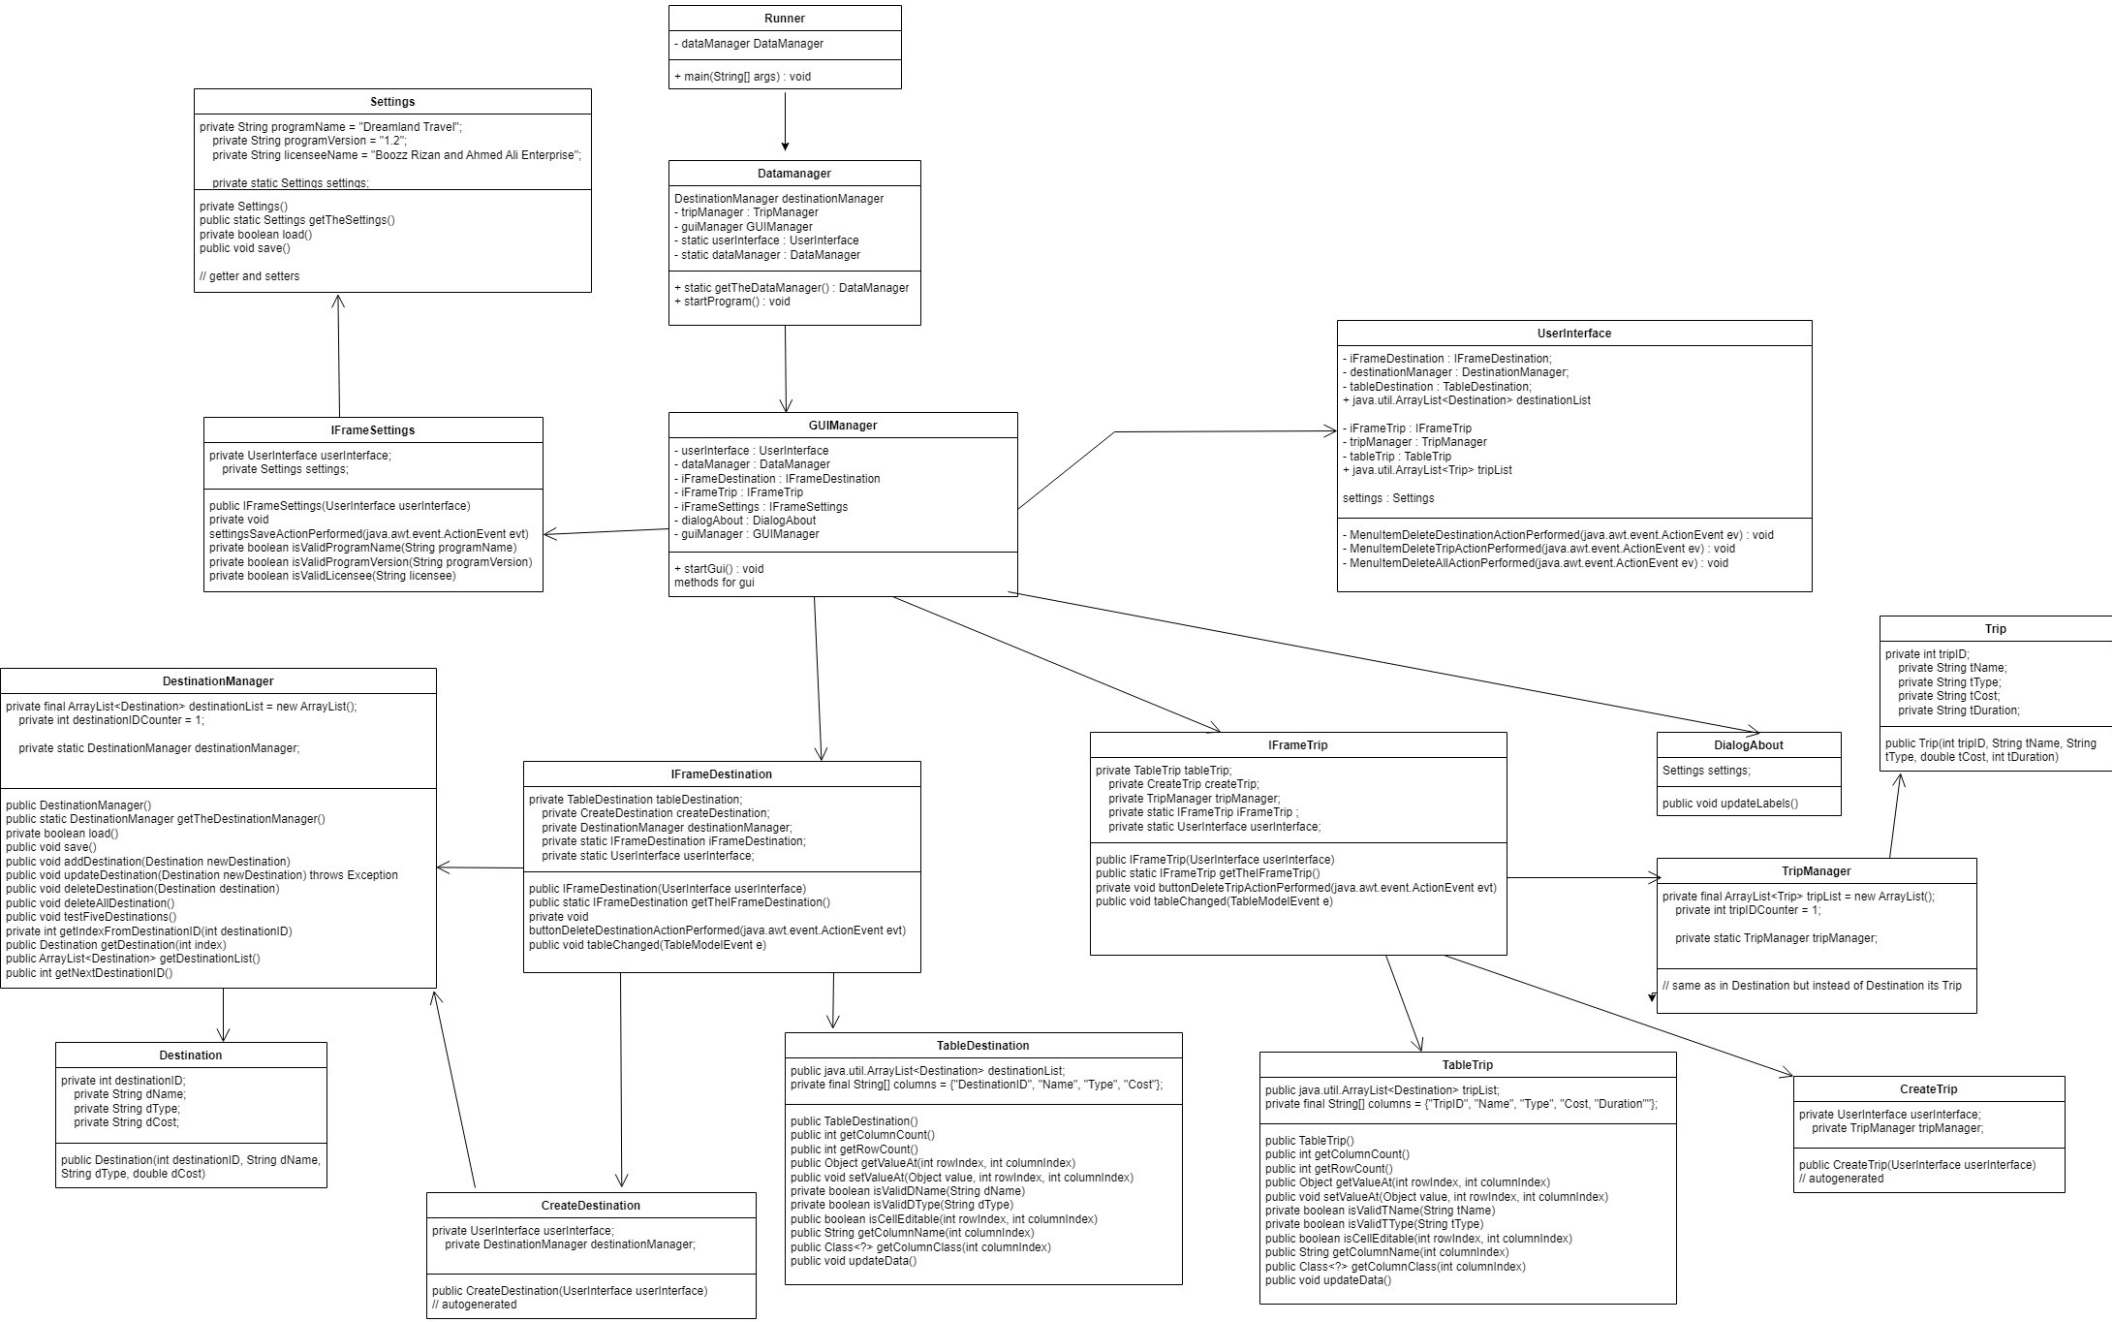
Runner
- dataManager DataManager
+ main(String[] args) : void
Settings
private String programName = "Dreamland Travel";
private String programVersion = "1.2";
private String licenseeName = "Boozz Rizan and Ahmed Ali Enterprise";
private static Settings settings;
private Settings()
public static Settings getTheSettings()
private boolean load()
public void save()
// getter and setters
Datamanager
DestinationManager destinationManager
- tripManager : TripManager
- guiManager GUIManager
- static userInterface : UserInterface
- static dataManager : DataManager
+ static getTheDataManager() : DataManager
+ startProgram() : void
UserInterface
- iFrameDestination : IFrameDestination;
- destinationManager : DestinationManager;
- tableDestination : TableDestination;
+ java.util.ArrayList<Destination> destinationList
- iFrameTrip : IFrameTrip
- tripManager : TripManager
- tableTrip : TableTrip
+ java.util.ArrayList<Trip> tripList
settings : Settings
- MenuItemDeleteDestinationActionPerformed(java.awt.event.ActionEvent ev) : void
- MenuItemDeleteTripActionPerformed(java.awt.event.ActionEvent ev) : void
- MenuItemDeleteAllActionPerformed(java.awt.event.ActionEvent ev) : void
IFrameSettings
private UserInterface userInterface;
private Settings settings;
public IFrameSettings(UserInterface userInterface)
private void
settingsSaveActionPerformed(java.awt.event.ActionEvent evt)
private boolean isValidProgramName(String programName)
private boolean isValidProgramVersion(String programVersion)
private boolean isValidLicensee(String licensee)
GUIManager
- userInterface : UserInterface
- dataManager : DataManager
- iFrameDestination : IFrameDestination
- iFrameTrip : IFrameTrip
- iFrameSettings : IFrameSettings
- dialogAbout : DialogAbout
- guiManager : GUIManager
+ startGui() : void
methods for gui
Trip
private int tripID;
private String tName;
private String tType;
private String tCost;
private String tDuration;
public Trip(int tripID, String tName, String tType, double tCost, int tDuration)
DestinationManager
private final ArrayList<Destination> destinationList = new ArrayList();
private int destinationIDCounter = 1;
private static DestinationManager destinationManager;
public DestinationManager()
public static DestinationManager getTheDestinationManager()
private boolean load()
public void save()
public void addDestination(Destination newDestination)
public void updateDestination(Destination newDestination) throws Exception
public void deleteDestination(Destination destination)
public void deleteAllDestination()
public void testFiveDestinations()
private int getIndexFromDestinationID(int destinationID)
public Destination getDestination(int index)
public ArrayList<Destination> getDestinationList()
public int getNextDestinationID()
IFrameDestination
private TableDestination tableDestination;
private CreateDestination createDestination;
private DestinationManager destinationManager;
private static IFrameDestination iFrameDestination;
private static UserInterface userInterface;
public IFrameDestination(UserInterface userInterface)
public static IFrameDestination getTheIFrameDestination()
private void
buttonDeleteDestinationActionPerformed(java.awt.event.ActionEvent evt)
public void tableChanged(TableModelEvent e)
IFrameTrip
private TableTrip tableTrip;
private CreateTrip createTrip;
private TripManager tripManager;
private static IFrameTrip iFrameTrip ;
private static UserInterface userInterface;
public IFrameTrip(UserInterface userInterface)
public static IFrameTrip getTheIFrameTrip()
private void buttonDeleteTripActionPerformed(java.awt.event.ActionEvent evt)
public void tableChanged(TableModelEvent e)
DialogAbout
Settings settings;
public void updateLabels()
TripManager
private final ArrayList<Trip> tripList = new ArrayList();
private int tripIDCounter = 1;
private static TripManager tripManager;
// same as in Destination but instead of Destination its Trip
Destination
private int destinationID;
private String dName;
private String dType;
private String dCost;
public Destination(int destinationID, String dName, String dType, double dCost)
CreateDestination
private UserInterface userInterface;
private DestinationManager destinationManager;
public CreateDestination(UserInterface userInterface)
// autogenerated
TableDestination
public java.util.ArrayList<Destination> destinationList;
private final String[] columns = {"DestinationID", "Name", "Type", "Cost"};
public TableDestination()
public int getColumnCount()
public int getRowCount()
public Object getValueAt(int rowIndex, int columnIndex)
public void setValueAt(Object value, int rowIndex, int columnIndex)
private boolean isValidDName(String dName)
private boolean isValidDType(String dType)
public boolean isCellEditable(int rowIndex, int columnIndex)
public String getColumnName(int columnIndex)
public Class<?> getColumnClass(int columnIndex)
public void updateData()
TableTrip
public java.util.ArrayList<Destination> tripList;
private final String[] columns = {"TripID", "Name", "Type", "Cost, "Duration""};
public TableTrip()
public int getColumnCount()
public int getRowCount()
public Object getValueAt(int rowIndex, int columnIndex)
public void setValueAt(Object value, int rowIndex, int columnIndex)
private boolean isValidTName(String tName)
private boolean isValidTType(String tType)
public boolean isCellEditable(int rowIndex, int columnIndex)
public String getColumnName(int columnIndex)
public Class<?> getColumnClass(int columnIndex)
public void updateData()
CreateTrip
private UserInterface userInterface;
private TripManager tripManager;
public CreateTrip(UserInterface userInterface)
// autogenerated