




Vidyavardhini's College of Engineering & Technology

Department of Artificial Intelligence and Data Science (AI&DS)

Name:	Dhruv Amit Gharat
Roll No:	11
Class/Sem:	SE/IV
Experiment No.:	4
Title:	Program to display character in uppercase and lowercase.
Date of Performance:	
Date of Submission:	
Marks:	
Sign of Faculty:	




Theory:

int 21h



Flowchart:

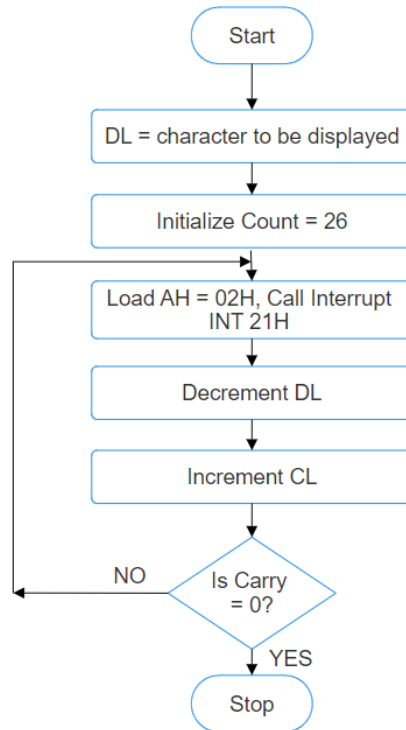

Algorithm:


1. Start.
2. Initialize DL with 'A'.
3. Load CL with count = 26.
4. Load AH = 02H and call INT 21H.
5. Increment DL, to next character.
6. Decrement the count.
7. Repeat steps 4,5,6 till CL is not zero.
8. To end the program use DOS interrupt:
 - 1) Load AH = 41H.
 - 2) Call INT 21 H.
9. Stop.



Assembly Code:

```
01 mov cx,26
02 mov dl,'a'
03 L1: mov ah,02h
04 int 21h
05 inc dl
06 dec cx
07 JNZ L1
08
09 mov dl,0ah
10 int 21h
11 mov dl,0dh
12 int 21h
13
14 mov cx,26
15 mov dl,'A'
16 L2: mov ah,02h
17 int 21h
18 inc dl
19 dec cx
20 JNZ L2
21
22 mov dl,0ah
23 int 21h
24 mov dl,0dh
25 int 21h
26
27 mov cx,9
28 mov dl,'1'
29 L3: mov ah,02h
30 int 21h
31 inc dl
32 dec cx
33 JNZ L3
```

Output:

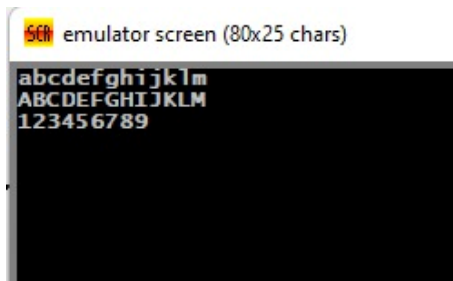

Conclusion:

1. Explain INT 21H.

Ans. INT 21h is a software interrupt in x86 assembly language, primarily used in DOS (Disk Operating System) environments. It provides access to various DOS services, such as file operations, input/output, and system functions. Here's an explanation of INT 21h:

- Purpose: INT 21h serves as a gateway to DOS services, allowing programmers to perform various tasks related to file management, input/output operations, and system control.
- Functionality: The specific functionality accessed through INT 21h depends on the value passed in the AH (accumulator high) register before invoking the interrupt. Different values in AH correspond to different DOS services.
- Common Services:
 - File Operations: Creating, opening, closing, reading from, and writing to files.
 - Directory Operations: Creating, removing, and navigating directories.
 - Input/Output: Reading characters from the keyboard, displaying characters on the screen, and handling input/output redirection.
 - Program Execution: Loading and executing other programs, terminating the current program, and obtaining information about the environment.



Vidyavardhini's College of Engineering & Technology

Department of Artificial Intelligence and Data Science (AI&DS)

- d) Example Usage: For instance, to print a character to the screen, the programmer would load the character into the DL register and set AH to the appropriate value for the print function (e.g., AH = 02h for printing a character). Then, the programmer would invoke the INT 21h interrupt, which would cause DOS to perform the requested operation.
- e) 5. Limitations: While INT 21h provides convenient access to DOS services, it is specific to DOS environments and may not be available in other operating systems or modern computing environments. INT 21h remains a crucial mechanism for interacting with DOS services and is commonly used in legacy software and DOS emulators.

2. Explain working of increment and decrement instructions.

Ans. Increment and decrement instructions are fundamental operations in computer architecture used to increase or decrease the value stored in a register or memory location by one. Here's how they work:

- a) Increment (INC):
 - a. Register Mode: The content of the specified register is incremented by one.
 - b. Memory Mode: The content of the memory location addressed by the specified memory address is incremented by one.
 - c. After the increment operation, the zero flag (ZF) is set if the result is zero, and the sign flag (SF) is set based on the result's sign.
- b) Decrement (DEC):
 - a. Register Mode: The content of the specified register is decremented by one.
 - b. Memory Mode: The content of the memory location addressed by the specified memory address is decremented by one.
 - c. After the decrement operation, the zero flag (ZF) is set if the result is zero, and the sign flag (SF) is set based on the result's sign.
- c) Overflow and Carry Flags:
 - a. These instructions do not affect the overflow (OF) or carry (CF) flags, which are used to indicate arithmetic overflow or carry conditions.
 - b. Overflow occurs when the result of an arithmetic operation cannot be represented using the available number of bits.
 - c. Carry occurs when an addition operation generates a carry-out or a subtraction operation requires borrowing.