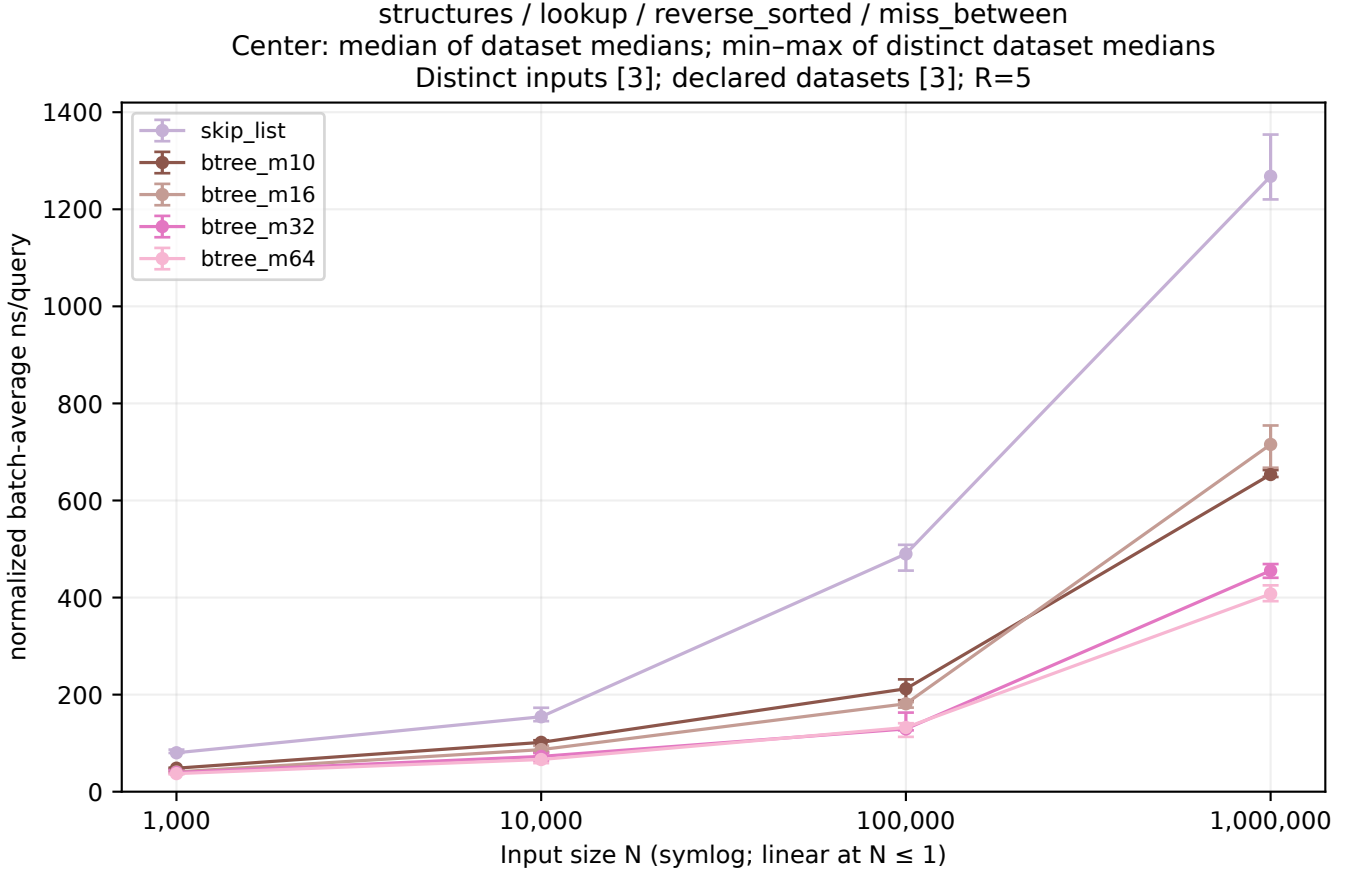

structures / lookup / reverse_sorted / miss_between
Center: median of dataset medians; min–max of distinct dataset medians
Distinct inputs [3]; declared datasets [3]; R=5
skip_list
btree_m10
btree_m16
btree_m32
btree_m64
normalized batch-average ns/query
0
200
400
600
800
1000
1200
1400
1,000
10,000
100,000
1,000,000
Input size N (symlog; linear at N ≤ 1)