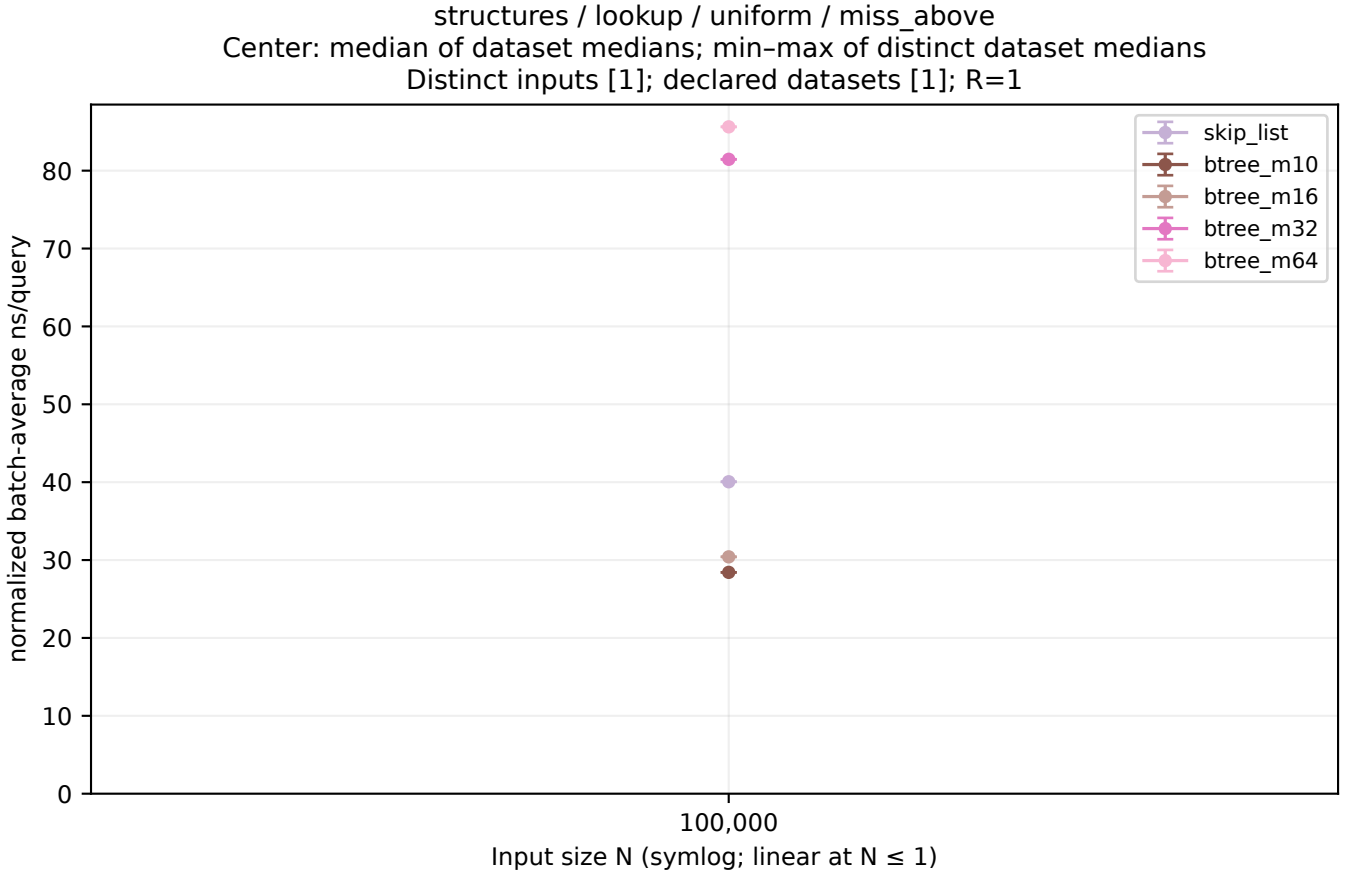

structures / lookup / uniform / miss_above
Center: median of dataset medians; min–max of distinct dataset medians
Distinct inputs [1]; declared datasets [1]; R=1
skip_list
btree_m10
btree_m16
btree_m32
btree_m64
normalized batch-average ns/query
0
10
20
30
40
50
60
70
80
100,000
Input size N (symlog; linear at N ≤ 1)