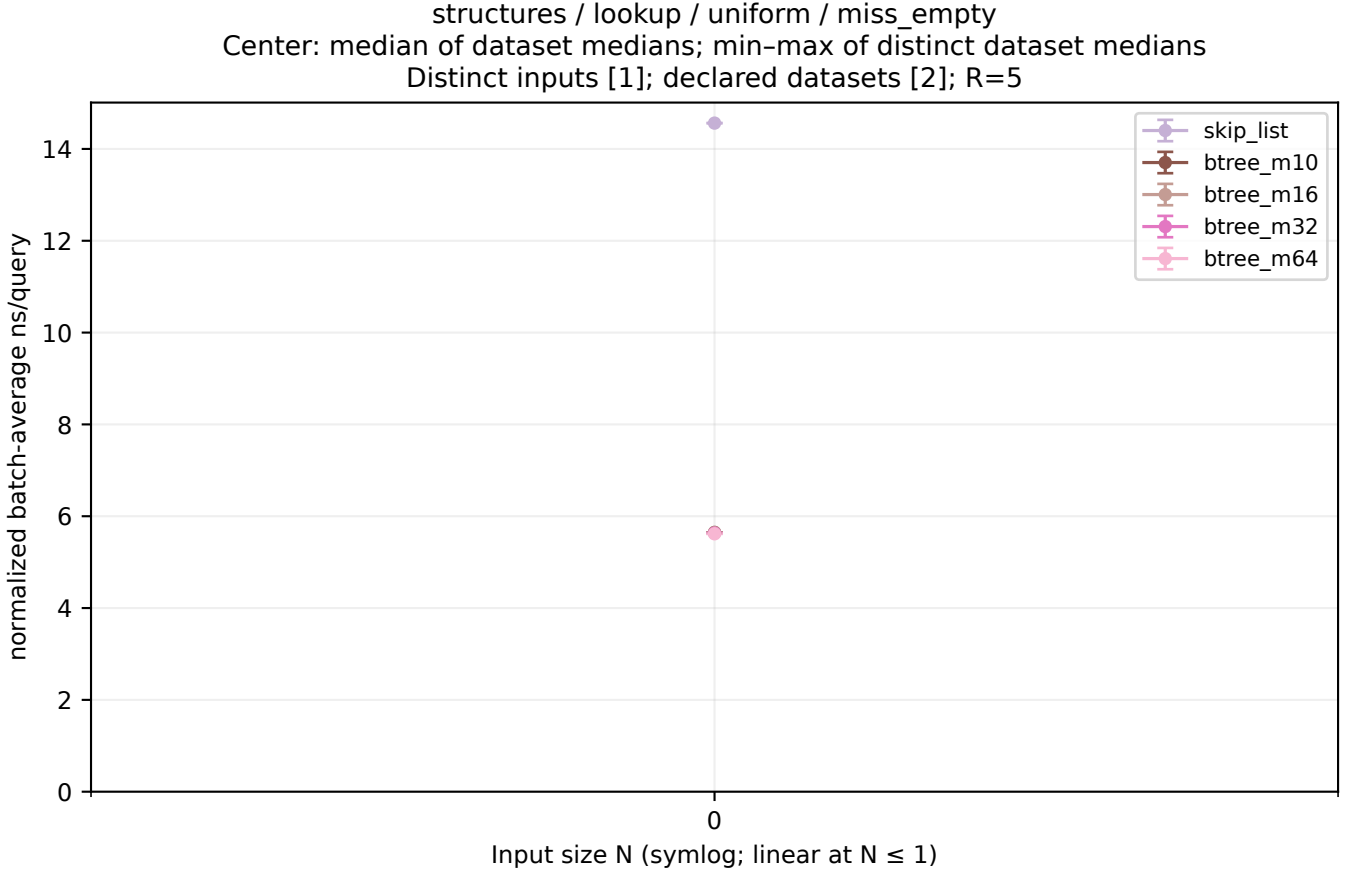

structures / lookup / uniform / miss_empty
Center: median of dataset medians; min–max of distinct dataset medians
Distinct inputs [1]; declared datasets [2]; R=5
skip_list
btree_m10
btree_m16
btree_m32
btree_m64
normalized batch-average ns/query
0
2
4
6
8
10
12
14
0
Input size N (symlog; linear at N ≤ 1)