



UNIVERSITY OF CHILE
FACULTY OF PHYSICAL AND MATHEMATICAL SCIENCES
DEPARTAMENT OF PHYSICS

NON-CONVENTIONAL COUPLING AND TOPOLOGICAL TRANSITIONS IN
MULTIORBITAL PHOTONIC STRUCTURES

THESIS SUBMITTED IN PARTIAL FULFILLMENT OF THE REQUIREMENTS FOR
THE DEGREE OF MASTER OF SCIENCE, MENTION IN PHYSICS

DIEGO ANTONIO ROMÁN CORTÉS

PROFESSOR ADVISOR:
RODRIGO VICENCIO POBLETE

THESIS COMMITTEE MEMBERS:
CARLA HERMANN AVIGLIANO
PEDRO ORELLANA DINAMARCA

This work was partially funded by Millenium Institute for Research in Optics (MIRO)
ICN17_012 and ANID FONDECYT Grant No. 1231313

Powered@NLHPC: This thesis was partially supported by the supercomputing
infrastructure of the NLHPC (CCSS210001)

SANTIAGO OF CHILE

2025

SUMMARY OF THESIS SUBMITTED IN
PARTIAL FULFILLMENT OF THE
REQUIREMENTS FOR THE DEGREE OF
MASTER OF SCIENCE, MENTION IN
PHYSICS
BY: DIEGO ANTONIO ROMÁN CORTÉS
YEAR: 2025
PROFESSOR ADVISOR: RODRIGO
VICENCIO POBLETE

NON-CONVENTIONAL COUPLING AND TOPOLOGICAL TRANSITIONS IN MULTIORBITAL PHOTONIC STRUCTURES

In this thesis, non-conventional coupling phenomena in multi-orbital photonic lattices, fabricated using the femtosecond laser writing technique, are studied. Mechanisms that transcend coupling between fundamental modes are investigated, incorporating orbital degrees of freedom, structural asymmetries, and topological effects. Light propagation is analyzed in configurations where transverse SS and PP modes interact in a controlled manner, revealing new forms of optical manipulation based on symmetry, geometry, and modal structure.

First, the phenomenon of **dipolar invisibility** of P dipole modes is investigated, demonstrating experimentally that, under certain geometric conditions, these modes can remain optically decoupled. This effect is observed in a graphene-type photonic lattice and is modeled theoretically through an extension of coupled-mode theory that incorporates both long-range couplings and non-orthogonality between modes.

Subsequently, the phenomenon of **non-symmetric evanescent coupling** in dimers with different refractive index contrasts is studied. A generalized formulation of coupled-mode theory that accounts for this asymmetry in the dynamics, even in the absence of loss or gain, is presented. The breaking of reciprocity is experimentally validated through measurements of intensity imbalance dependent on the input channel.

Finally, **SP interorbital coupling** is explored. This mechanism allows the hybridization of modes of distinct transverse symmetry through the precise tuning of their propagation constants. Using this technique, a lattice implementing the SP-SSH model—a multi-orbital extension of the Su-Schrieffer-Heeger model—is realized. This system exhibits two distinct transitions between topological phases, determined by geometric dimerization and orbital detuning.

The experimental and numerical results presented in this thesis reveal new ways to control light propagation by utilizing the orbital degrees of freedom of guided modes, paving the way for the design of advanced photonic lattices with topological and directional functionality.

*Mas si buscáis descubrimientos
Tierras irrealizables más allá de los cielos
Vegetante obsesión de musical congoja
Volvamos al silencio
Trampas de luz y cascadas lujosas
Trampas de perla y de lámpara acuática
Anda como los ciegos con sus ojos de piedra
Presintiendo el abismo a todo paso
Mas no temas de mí que mi lenguaje es otro
No trato de hacer feliz ni desgraciado a nadie
Ni descolgar banderas de los pechos
Ni dar anillos de planetas
Ni hacer satélites de mármol en torno a un talismán ajeno
Quiero darte una música de espíritu
Música mía de esta cítara plantada en mi cuerpo
Música que hace pensar en el crecimiento de los árboles
Y estalla en luminarias dentro del sueño*

Extracts from *Altazor*, Vicente Huidobro

Acknowledgments

Behind every achievement, there is a constellation of people who made it possible. Though it is impossible to name them all, I hold in my memory a profound gratitude for their teachings, their time, and their trust.

First, to my innermost circle:

- To my parents, for the lessons, values, and experiences I will always carry with me.
- To my brother, Martín, for countless nights of anime, games, and complicit laughter.
- To my fiancée, Catalina, for her unconditional support and affection in the darkest moments, and for being my refuge and motivation in the brightest.

I am grateful to Pablo and Cristóbal, my pillars for fourteen years now: for the silliness that outweighs the seriousness, for the comfortable silences, and the spontaneous get-togethers that seem to have no end.

A special thanks to the insufferable *Amazing* Fabián and *Amazing* Carlos, for making work-days more bearable, for listening to me when I needed it most, for pushing me when I needed it most, and for motivating me to bring out the best in myself even when I didn't believe in it.

A very particular place is held by the members—past, present, and future—of the Photonic Lattices Group:

- To Rodrigo, for taking in five years ago the then-undergraduate Physics freshman that I was, for trusting me, and for teaching me everything I know about Photonic Lattices, for introducing me to the academic world, and for giving me life lessons that I will carry as a compass into the future.
- To Paloma, Bastián, Ignacio, and Diego, for their infinite patience, their selfless help, and for making every day I spent with them in the lab a space of learning, collaboration, and camaraderie that I will always treasure.
- To Polette, Romina, Lucas, Daniel, and Sofía, for giving warm and vibrant colors to LABGO3, for being the best colleagues I could have asked for, and for the laughter, the good gossip, and the constant learning that made the office and the lab feel like a second home.

To all of you, my eternal gratitude for being a part of this story.

Contents

1	Introduction	1
2	Theoretical Framework	4
2.1	Light Propagation in Dielectric Waveguides from Maxwell's Equations . . .	4
2.2	Analytical solutions for one-dimensional slab-type waveguides	6
2.2.1	Graphical Solutions and Comparison Between TE and TM Modes . . .	8
2.3	Analytical solutions for circular optical fiber	10
2.3.1	TE and TM modes	12
2.3.2	HE and EH modes	13
2.4	Normal modes in waveguides	14
2.5	Coupled-Mode Theory	15
2.5.1	Derivation from a Variational Principle	15
2.5.2	TE Dimer in Slab-Type Waveguides	18
2.5.3	Bands and Topology: Photonic Su-Schrieffer-Heeger Lattice	19
3	Numerical Methods	23
3.1	Eigenmode Expansion	23
3.2	Beam Propagation Method	24
3.2.1	Implementation via Fourier Transform (FFTBPM)	25
3.3	Comments on Coupled-Mode Theory	26
4	Experimental Methods	29
4.1	Direct Writing of Waveguides	29
4.2	Supercontinuum Laser Excitation Setup	30
4.2.1	Premodulation Stage	30
4.2.2	Modulation Stage	30
4.2.3	Coupling Stage	31
4.2.4	Camera Capture Stage	31
4.2.5	Optical Circuit	32
4.2.6	Generation of Complex Images	32
4.3	Image Analysis	33
5	Coupling of p_y Modes and the Invisibility Angle	34
5.1	Couplers	34
5.2	Honeycomb Lattices	36
6	Non-Symmetric Evanescent Coupling	40
6.1	Origin of Non-Symmetric Dynamics	40

6.2	Numerical Validation	41
6.3	Experimental Verification	42
6.4	Implications and Applications	42
7	Photonic Molecules	43
7.1	Eigenstates of the Photonic Coupler for Small Separation Distances	44
7.2	Photonic Molecules in the SP-SSH Lattice	45
7.3	Topology in the SP-SSH Lattice	45
7.4	Experimental Implementation	47
8	Conclusions	50
	Bibliography	57
	Appendices	58
	Appendix A Papers published in chronological order	58
	Appendix B Orthogonality of the normal modes	63
	Appendix C Código en Python para cálculo de modos normales	63
	Appendix B PM C code	66
	Appendix H ologram generator Python code	71

List of Figures

2.1	Shape of a slab-type waveguide.	6
2.2	Graphical solutions for TE modes.	9
2.3	Forma espacial de la componente longitudinal del campo magnético.	9
2.4	First guided normal modes for a circular waveguide or optical fiber.	14
2.5	Schematic of the SSH model.	20
2.6	Topology of the SSH lattice.	22
2.7	Spectrum of the finite SSH lattice.	22
3.1	Relative error and execution time.	24
3.2	Excitation of the central site of a one-dimensional lattice.	26
3.3	Comparison between EME and CMT.	28
3.4	Dynamics with EME and CMT.	28
4.1	Schematic of the waveguide writing technique.	29
4.2	Supercontinuum laser excitation setup.	30
4.3	Spatial light modulation for arbitrary amplitude and phase masks.	31
4.4	Diagram of the spatial light modulation system	32
4.5	Characterization of optical vortices via Mach-Zehnder interferometry.	33
5.1	Experimental angular sweep	35
5.2	Propagation constants and angular couplings for P modes	35
5.3	Microscope images of honeycomb-type photonic lattices for P modes	36
5.4	Honeycomb model for p_y modes with couplings up to third neighbors	37
5.5	Spectrum of the honeycomb lattice of p_y modes as a function of the angle	38
5.6	Decomposition of the lattice into quasi-SSH chains	38
6.1	Schematic of non-symmetric coupling.	40
6.2	Absolute average of intensity imbalances $\bar{I}(z)$ as a function of propagation distance z	41
6.3	Output profiles for different propagation lengths.	42
7.1	Analogy and differences between quantum molecules (left) and photonic molecules (right).	43
7.2	Propagation and couplings in photonic molecules	44
7.3	Schematic of the SP-SSH lattice and the considered couplings.	45
7.4	Topology of the SP-SSH lattice for $\Delta\beta = 0$	46
7.5	Topological phase diagram.	47
7.6	Numerical-experimental analysis of the SP-SSH model	48
7.7	Experimental characterization of SP-SSH lattices	49

1. Introduction

Over the past decade, several Nobel Prizes in physics have been closely linked to optics [1]: for the generation of ultrashort light pulses—femtoseconds [2] and then attoseconds [3–5]—, for pioneering experiments with entangled photons [6–8], for the development of optical tweezers [9], and for the invention of high-efficiency LEDs [10–12]. These fundamental advances have driven applications in industry, biomedicine, telecommunications, and even defense. A prominent everyday application is the optical fiber, which acts as a waveguide for light and is now the primary medium for global data transmission [13, 14].

Many of these developments have been enhanced by the *femtosecond laser writing* technique, which allows for the fabrication of three-dimensional photonic lattices of waveguides with micrometric precision. This technology has enabled the experimental realization of lattices with complex geometries and artificial degrees of freedom, and has been used to study phenomena such as Bloch oscillations [15], Anderson localization [16], flat band dynamics [17–20], topological phases [21–24], formation of nonlinear solitons [25], and even the propagation of quantum light [26–28].

Within this framework, the present work focuses on the study of *multi-orbital* photonic lattices, in which the internal structure of the transverse modes of light can be used as a new control resource. Particularly, the fundamental waveguide modes (denoted here as S) and their first antisymmetric transverse excitations (denoted as P) are studied.

The use of this notation follows a structural analogy with atomic orbitals: the S mode has axial symmetry and lacks transverse nodes, while the P mode presents a lobular structure with a node on its transverse axis. This nomenclature is adopted as a visual and conceptual resource but does not imply the existence of central potentials or angular momentum quantization as in the atomic case. Its purpose is to establish an intuitive language that allows communicating the spatial structure and symmetry of the optical modes and facilitates their analysis in complex configurations.

This analogy extends to the use of terms like *photonic molecules*, which describe a system of two strongly coupled optical waveguides, whose eigenfunctions combine to generate symmetric and antisymmetric hybrid modes. This idea takes inspiration from quantum chemistry, where atomic orbitals combine linearly to form bonding (σ) and antibonding (σ^*) molecular orbitals. In this thesis, we will call a *photonic molecule* a pair of coupled waveguides whose modal hybridization produces collective states analogous to these orbitals.

It is important to emphasize that this is a formal and geometric analogy. It does not imply the existence of shared electrons, bonding forces, quantum levels bound to electronic configurations, or quantum correlations typical of the molecular world. Effects such as binding energy, selection rules, or quantization of electronic states are not observed. The term is used as a visual and structural metaphor that facilitates the understanding of modal coupling and its role as a building block in more complex photonic lattices. This conceptual framework has been used in few works under the name *photonic molecules* [29], and is adopted here for communicative purposes, but with a clear delineation of its physical scope.

Along the same lines, the terminology of σ and π bonds is used to refer to the types of modal coupling between waveguides: σ -type coupling occurs through frontal (axial) superposition of modes, while π -type arises from lateral coupling, with nodes on the central axis. This characterization is based on the geometry of the involved optical fields and will be discussed in detail in the corresponding chapters.

One of the experimental phenomena that motivates this study is the *invisibility angle* [30], described in Chapter 5. In certain geometric configurations, the P modes completely decouple from each other, remaining optically *invisible*. This effect reveals that the transverse symmetry of the modes can be actively exploited as a control tool, allowing for new forms of light localization and routing.

On the other hand, the breaking of symmetry in the evanescent couplings between waveguides with different refractive indices is also analyzed, leading to non-reciprocal dynamics. Although it is traditionally assumed that the coupling $C_{i \rightarrow j}$ between two waveguides is equal to $C_{j \rightarrow i}$, this symmetry can be broken even in passive systems, generating asymmetric couplings that are modeled using non-Hermitian matrices with real spectra. This phenomenon is addressed in Chapter 6.

Finally, the concept of SP inter-orbital coupling is introduced, which allows hybridizing modes with different symmetry through the precise tuning of their propagation constants. This mechanism is experimentally implemented in Chapter 7, where SP-SSH type lattices are designed and characterized: a multi-orbital extension of the Su-Schrieffer-Heeger model [31], with two independent degrees of freedom that generate a double topological transition. The concept of topological transition is analyzed from the perspective of band theory, the existence of edge modes, and bulk polarization.

This approach complements and reinforces the general thrust of this thesis: to study how the internal structure of modes—be it their transverse or orbital symmetry, as well as the difference between them—can be used as a physical resource to control light propagation in photonic lattices.

This thesis is organized as follows:

Chapter 2 introduces the theoretical formalism used throughout the thesis, including the principles of modal propagation, coupled-mode theory in discrete lattices, and the relevant topological concepts in the study of photonic bands.

Chapter 3 presents the numerical tools employed. The Eigenmode Expansion (EME) method, which allows modeling the stationary evolution of light, is described, along with other complementary methodologies such as the Beam Propagation Method (BPM) and Coupled-Mode Theory (CMT).

Chapter 4 details the experimental technique of femtosecond pulsed laser writing, with emphasis on the key parameters for the design and fabrication of three-dimensional multi-orbital photonic lattices.

Chapter 5 studies the phenomenon of P mode invisibility, experimentally characterizing the critical geometry that leads to the optical decoupling of these modes. This property is tested in a graphene-type photonic lattice. To achieve quantitative agreement between theory and experiment, an extended model is introduced that incorporates both modal *non-orthogonality* and *long-range couplings* between non-adjacent waveguides.

Chapter 6 examines the phenomenon of asymmetric evanescent coupling between waveguides of different refractive indices. A correction to conventional coupled-mode theory is presented that allows modeling these effects using non-Hermitian coupling matrices but with real spectra, and the resulting intensity imbalance in asymmetric dimers is experimentally validated.

Chapter 7 analyzes the formation of hybrid modes through photonic molecules for their use as building blocks in the formation of multi-orbital lattices. On this basis, an SP-SSH type lattice, a multi-orbital extension of the Su-Schrieffer-Heeger model, is implemented and characterized, including the study of its topological phases through bulk polarization and edge spectra.

Finally, Chapter 8 presents the conclusions of the work and discusses possible extensions to other photonic platforms.

2. Theoretical Framework

In this chapter, the analytical-theoretical tools that allow for the description of the photonic systems studied in this thesis will be developed. These systems consist of the propagation of low-power laser light¹ propagated in coupled systems of waveguides, which are written inside a borosilicate wafer. These experimental conditions allow the behavior of light to be described using Maxwell's equations applied to a linear, isotropic, non-magnetic medium without free charge or current sources.

2.1 Light Propagation in Dielectric Waveguides from Maxwell's Equations

The Maxwell's equations in this regime, in the International System of Units (SI), are:

$$\nabla \cdot [\varepsilon(\mathbf{r})\mathbf{E}] = 0 , \quad (2.1)$$

$$\nabla \times \mathbf{E} = -\mu_0 \frac{\partial \mathbf{H}}{\partial t} , \quad (2.2)$$

$$\nabla \cdot \mathbf{H} = 0 , \quad (2.3)$$

$$\nabla \times \mathbf{H} = \varepsilon(\mathbf{r}) \frac{\partial \mathbf{E}}{\partial t} , \quad (2.4)$$

where $\mathbf{E}$ is the electric field and $\mathbf{H}$ is the magnetic field. In general, the waveguides considered are systems that are invariant in the direction of propagation $\hat{\mathbf{z}}$. Therefore, the refractive index profile can be expressed as $n(x, y) = n_0 + \Delta n(x, y)$, where $n_0 = 1.48$ is the refractive index of the borosilicate substrate and $\Delta n(x, y)$ represents the transverse modulation of the index, with maximum values in the range of $10^{-5} - 10^{-3}$. This spatial variation of the index, $\Delta n(x, y)$, is responsible for the optical confinement in the transverse plane (x, y) , allowing for the guided propagation of electromagnetic modes along the $\hat{\mathbf{z}}$ axis.

After assuming a harmonic time dependence proportional to $e^{-i\omega t}$ Faraday-Lenz's law (2.2) can be substituted into Ampère-Maxwell's law (2.4), yielding:

$$\nabla \times \left(\frac{\nabla \times \mathbf{E}}{i\omega\mu_0} \right) = -i\omega\varepsilon_0 n^2 \mathbf{E} \implies \nabla \times \nabla \times \mathbf{E} = k_0^2 n^2 \mathbf{E} , \quad (2.5)$$

where $k_0 \equiv \omega/c$ is the vacuum wavenumber. By vector calculus identity, it holds that: $\nabla \times \nabla \times \mathbf{E} = \nabla(\nabla \cdot \mathbf{E}) - \nabla^2 \mathbf{E}$. Gauss' law implies that (2.1) implica que $\nabla \cdot \mathbf{E} = -\frac{\nabla n^2}{n^2} \cdot \mathbf{E}$.

¹1 mW output power, within the safety regime of Class 3b lasers.

Substituting into equation (2.5), we obtain the following:

$$(\nabla^2 + k_0^2 n^2) \mathbf{E} = -\nabla \left(\frac{\nabla n^2}{n^2} \cdot \mathbf{E} \right) . \quad (2.6)$$

Similarly, it is possible to combine Ampère-Maxwell's (2.4) and Faraday-Lenz's (2.2) equations together with the null divergence of the magnetic field $\mathbf{H}$ (2.3):

$$\begin{aligned} \nabla \times \left(\frac{\nabla \times \mathbf{H}}{-i\omega\epsilon_0 n^2} \right) &= i\omega\mu_0 \mathbf{H} \implies \nabla \times \left(\frac{1}{n^2} \nabla \times \mathbf{H} \right) = k_0^2 \mathbf{H} , \\ \nabla \times \nabla \times \mathbf{H} + \nabla n^2 \times (\nabla \times \mathbf{H}) &= k_0^2 n^2 \mathbf{H} . \end{aligned}$$

The analogous equation to (2.6) for $\mathbf{H}$ is therefore:

$$(\nabla^2 + k_0^2 n^2) \mathbf{H} = i\omega\epsilon_0 \nabla n^2 \times \mathbf{E} . \quad (2.7)$$

In this thesis, we will work with systems in which light travels through a waveguide structure that is invariant in the $\hat{\mathbf{z}}$ direction and periodic in the transverse direction. It is therefore useful to separate the longitudinal and transverse components of the fields, assuming a plane-wave dependence of the form $e^{ik_z z}$ in the spatial variable z :

$$\nabla_{\perp} \times \mathbf{E} + ik_z \hat{\mathbf{z}} \times \mathbf{E} = i\omega\mu_0 \mathbf{H} , \quad (2.8)$$

$$\nabla_{\perp} \times \mathbf{H} + ik_z \hat{\mathbf{z}} \times \mathbf{H} = -i\omega\epsilon_0 n^2 \mathbf{E} . \quad (2.9)$$

If we consider the decompositions $\mathbf{E} = \mathbf{E}_{\perp} + \hat{\mathbf{z}}E_z$ and $\mathbf{H} = \mathbf{H}_{\perp} + \hat{\mathbf{z}}H_z$, $\nabla_{\perp} \equiv -\hat{\mathbf{z}} \times (\hat{\mathbf{z}} \times \nabla)$, the Maxwell's equations involving curls can be written as:

$$\nabla_{\perp} \times \mathbf{E}_{\perp} + ik_z \hat{\mathbf{z}} \times \mathbf{E}_{\perp} + \nabla_{\perp} \times (\hat{\mathbf{z}}E_z) = i\omega\mu_0 (\mathbf{H}_{\perp} + \hat{\mathbf{z}}H_z) , \quad (2.10)$$

$$\nabla_{\perp} \times \mathbf{H}_{\perp} + ik_z \hat{\mathbf{z}} \times \mathbf{H}_{\perp} + \nabla_{\perp} \times (\hat{\mathbf{z}}H_z) = -i\omega\epsilon_0 n^2 (\mathbf{E}_{\perp} + \hat{\mathbf{z}}E_z) . \quad (2.11)$$

After applying the cross product in the $\hat{\mathbf{z}}$ direction to equations (2.10) and (2.11), E_z y H_z can be expressed in terms of $\mathbf{E}_{\perp}$ and $\mathbf{H}_{\perp}$:

$$\begin{aligned} -i\nabla_{\perp} E_z &= k_z \mathbf{E}_{\perp} + \omega\mu_0 \hat{\mathbf{z}} \times \mathbf{H}_{\perp} , & -i\nabla_{\perp} H_z &= k_z \mathbf{H}_{\perp} - \omega\epsilon_0 n^2 \hat{\mathbf{z}} \times \mathbf{E}_{\perp} , \\ i\hat{\mathbf{z}} \times \nabla_{\perp} H_z &= k_z \hat{\mathbf{z}} \times \mathbf{H}_{\perp} + \omega\epsilon_0 n^2 \mathbf{E}_{\perp} , & i\hat{\mathbf{z}} \times \nabla_{\perp} E_z &= \omega\mu_0 \mathbf{H}_{\perp} + k_z \hat{\mathbf{z}} \times \mathbf{E}_{\perp} . \end{aligned}$$

Finally, the perpendicular components of the fields, $\mathbf{H}_{\perp}$ y $\mathbf{E}_{\perp}$, can be expressed in terms of

the longitudinal components, H_z y E_z :

$$\begin{aligned}\hat{\mathbf{z}} \times \mathbf{H}_\perp &= i \frac{(\omega \varepsilon_0 n^2 \nabla_\perp E_z - \hat{\mathbf{z}} \times \nabla_\perp H_z k_z)}{k_0^2 n^2 - k_z^2}, & \hat{\mathbf{z}} \times \mathbf{E}_\perp &= -i \frac{(k_z \hat{\mathbf{z}} \times \nabla_\perp E_z + \omega \mu_0 \nabla_\perp H_z)}{k_0^2 n^2 - k_z^2}, \\ \mathbf{H}_\perp &= \frac{i}{k_0^2 n^2 - k_z^2} (k_z \nabla_\perp H_z + \omega \varepsilon_0 n^2 \hat{\mathbf{z}} \times \nabla_\perp E_z), & \mathbf{E}_\perp &= \frac{i}{k_0^2 n^2 - k_z^2} (k_z \nabla_\perp E_z - \omega \mu_0 \hat{\mathbf{z}} \times \nabla_\perp H_z) .\end{aligned}\tag{2.12}$$

Equations (2.6), (2.7), and (2.12) will serve as the analytical tools for the two case studies in the following sections.

2.2 Analytical solutions for one-dimensional slab-type waveguides

The simplest system that can be studied is a slab waveguide, whose analytical form for the refractive index $n(x)$ is as follows:

$$n(x) = \begin{cases} n_1, & |x| \leq a \\ n_0, & |x| > a \end{cases},$$

with $n_1 > n_0$.

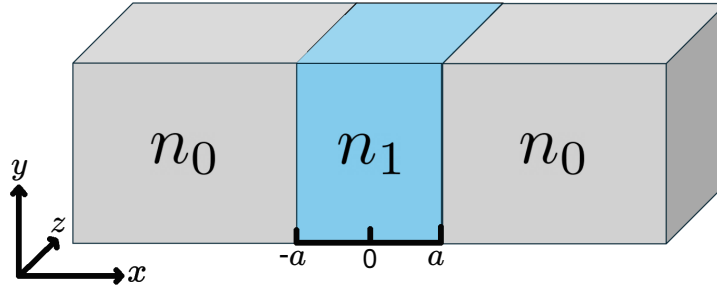


Figure 2.1: Shape of a slab-type waveguide. The structure is invariant in the $\hat{\mathbf{y}}$ (vertical) and $\hat{\mathbf{z}}$ (into the page) directions.

Since $\nabla n^2 = \mathbf{0}$ for $|x| \neq a$, the right-hand sides of equations (2.6) and (2.7) are of the Helmholtz type. Defining $\Psi = \{E_z, H_z\}$:

$$(\nabla_\perp^2 + k_0^2 n^2 - k_z^2) \Psi = \frac{d^2 \Psi}{dx^2} + (k_0^2 n^2 - k_z^2) \Psi = 0 .$$

Since $n(x) = n(-x)$, the solutions Ψ must be even or odd. Indeed, if $\Psi(x)$ is a solution, the change $x \rightarrow x' = -x$ implies that $\Psi(-x) = \pm \Psi(x)$, since $\Psi(x)$ is a real field. To find solutions whose energy is localized within the waveguide and decays outside it, we impose

$k_0^2 n_0^2 \leq k_z^2 \leq k_0^2 n_1^2$. It becomes natural to define $\alpha^2 \equiv k_0^2 n_1^2 - k_z^2$ y $\beta^2 \equiv k_z^2 - k_0^2 n_0^2$. With all this,

$$\Psi_s = \begin{cases} \Psi_{s1} \cos(\alpha x) , & |x| \leq a \\ \Psi_{s0} e^{-\beta|x|} , & |x| > a \end{cases} \implies \nabla_{\perp} \Psi_s = \begin{cases} -\hat{x} \alpha \Psi_{s1} \sin(\alpha x) , & |x| \leq a \\ -\hat{x} \frac{|x|}{x} \beta \Psi_{s0} e^{-\beta|x|} , & |x| > a \end{cases} .$$

Thus, the even vertical components E_y and H_y are expressed, due to equation (2.12) as:

$$E_y = \frac{i\omega\mu_0}{k_0^2 n^2 - k_z^2} \begin{cases} \alpha H_{s1} \sin(\alpha x) , & |x| \leq a \\ \frac{|x|}{x} \beta H_{s0} e^{-\beta|x|} , & |x| > a \end{cases} , \quad H_y = \frac{-i\omega\varepsilon_0 n^2}{k_0^2 n^2 - k_z^2} \begin{cases} \alpha E_{s1} \sin(\alpha x) , & |x| \leq a \\ \frac{|x|}{x} \beta E_{s0} e^{-\beta|x|} , & |x| > a \end{cases} .$$

On the other hand, the odd solutions have the form:

$$\Psi_a = \begin{cases} \Psi_{a1} \sin(\alpha x) , & |x| \leq a \\ \Psi_{a0} e^{-\beta|x|} , & |x| > a \end{cases} \implies \nabla_{\perp} \Psi_a = \begin{cases} \hat{x} \alpha \Psi_{a1} \cos(\alpha x) , & |x| \leq a \\ -\hat{x} \frac{|x|}{x} \beta \Psi_{a0} e^{-\beta|x|} , & |x| > a \end{cases} .$$

Therefore, Ey E_y y H_y are expressed as:

$$E_y = \frac{i\omega\mu_0}{k_0^2 n^2 - k_z^2} \begin{cases} -\alpha H_{a1} \cos(\alpha x) , & |x| \leq a \\ \frac{|x|}{x} \beta H_{a0} e^{-\beta|x|} , & |x| > a \end{cases} , \quad H_y = \frac{i\omega\varepsilon_0 n^2}{k_0^2 n^2 - k_z^2} \begin{cases} \alpha E_{a1} \cos(\alpha x) , & |x| \leq a \\ -\frac{|x|}{x} \beta E_{a0} e^{-\beta|x|} , & |x| > a \end{cases} .$$

By imposing continuity of the tangential components E_y , E_z , H_y y H_z :

$$\begin{aligned} E_{s1} \cos(\alpha a) &= E_{s0} e^{-\beta a} , & E_{a1} \sin(\alpha a) &= E_{a0} e^{-\beta a} , \\ H_{s1} \cos(\alpha a) &= H_{s0} e^{-\beta a} , & H_{a1} \sin(\alpha a) &= H_{a0} e^{-\beta a} , \\ n_1^2 E_{s1} \sin(\alpha a) / \alpha &= -n_0^2 E_{s0} e^{-\beta a} / \beta , & n_1^2 E_{a1} \cos(\alpha a) / \alpha &= n_0^2 E_{a0} e^{-\beta a} / \beta , \\ H_{s1} \sin(\alpha a) / \alpha &= -H_{s0} e^{-\beta a} / \beta , & H_{a1} \cos(\alpha a) / \alpha &= H_{a0} e^{-\beta a} / \beta . \end{aligned}$$

Seeking non-trivial solutions yields:

$$\left[\frac{\cos(\alpha a)}{\beta a} + \frac{\sin(\alpha a)}{\alpha a} \right] \left[n_0^2 \frac{\cos(\alpha a)}{\beta a} + n_1^2 \frac{\sin(\alpha a)}{\alpha a} \right] \left[\frac{\sin(\alpha a)}{\beta a} - \frac{\cos(\alpha a)}{\alpha a} \right] \left[n_0^2 \frac{\sin(\alpha a)}{\beta a} - n_1^2 \frac{\cos(\alpha a)}{\alpha a} \right] = 0$$

Two types of conditions will be distinguished:

- Transverse Electric (TE) Modes:

$$\frac{\cos(\alpha a)}{\beta a} + \frac{\sin(\alpha a)}{\alpha a} = 0 , \quad (2.13)$$

$$\frac{\sin(\alpha a)}{\beta a} - \frac{\cos(\alpha a)}{\alpha a} = 0 . \quad (2.14)$$

- Transverse Magnetic (TM) Modes:

$$n_0^2 \frac{\cos(\alpha a)}{\beta a} + n_1^2 \frac{\sin(\alpha a)}{\alpha a} = 0 , \quad (2.15)$$

$$n_0^2 \frac{\sin(\alpha a)}{\beta a} - n_1^2 \frac{\cos(\alpha a)}{\alpha a} = 0 . \quad (2.16)$$

Assuming α, β y k_z are known, the amplitudes must satisfy the relations:

$$\begin{aligned} E_{s1} \left[n_0^2 \frac{\cos(\alpha a)}{\beta a} + n_1^2 \frac{\sin(\alpha a)}{\alpha a} \right] &= 0 , & E_{a1} \left[n_0^2 \frac{\sin(\alpha a)}{\beta a} - n_1^2 \frac{\cos(\alpha a)}{\alpha a} \right] &= 0 , \\ H_{s1} \left[\frac{\cos(\alpha a)}{\beta a} + \frac{\sin(\alpha a)}{\alpha a} \right] &= 0 , & H_{a1} \left[\frac{\sin(\alpha a)}{\beta a} - \frac{\cos(\alpha a)}{\alpha a} \right] &= 0 . \end{aligned}$$

The equations above impose that $E_1 = 0$ when any TE mode condition is satisfied. Similarly, the equations below impose $H_1 = 0$ in the case of TM modes, which enforces transversality in the oscillation of the respective fields.

A corollary for TE modes is that $E_z = E_x = 0$, meaning the electric field polarization will be exclusively in the $\hat{y}$ direction. Likewise, only a beam polarized in $\hat{x}$ could excite a TM mode. Therefore, this must be taken into account in an experiment: an arbitrary initial condition will propagate as a linear combination of the TE and TM modes supported by the waveguide.

2.2.1 Graphical Solutions and Comparison Between TE and TM Modes

Using the two TE mode equations along with the constraint $(\alpha a)^2 + (\beta a)^2 = k_0^2 a^2 (n_1^2 - n_0^2) \equiv V^2$ it is possible to obtain graphical solutions for the propagation constants k_z from the intersections $(\alpha a, \beta a)$, as plotted in Figure 2.2. The number of modes increases with the difference between refractive indices.

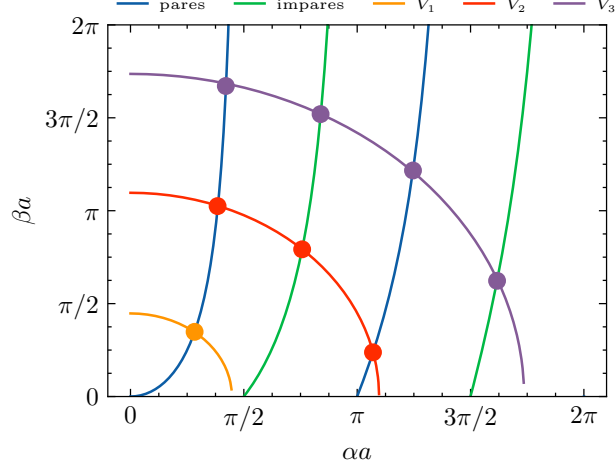


Figure 2.2: Graphical solutions for TE modes. A higher contrast $\Delta n = n_1 - n_0$, results in a greater number of guided modes supported by the waveguide.

After finding k_z , we have everything needed to substitute into the expressions obtained for the components of the electromagnetic field. Figure 2.3 plots the spatial form of four modes, which correspond to the four purple points in Figure 2.2.

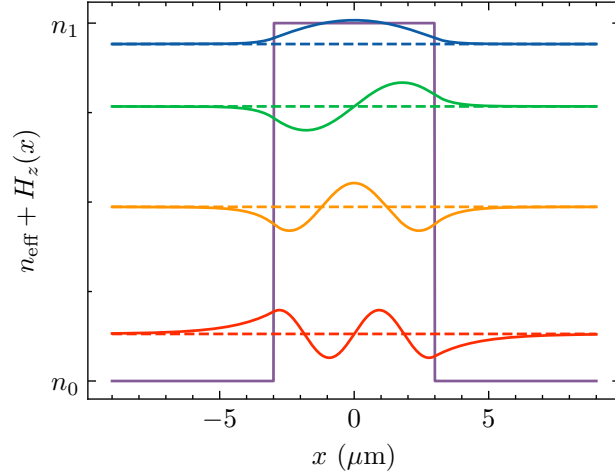


Figure 2.3: Spatial form of the longitudinal component of the magnetic field.

The cutoff condition in waveguides is equivalent to the energy no longer decaying in the region $|x| > a$, meaning that $\beta a \rightarrow 0$ must hold. Symmetric or even modes satisfy this condition when $\sin(V) = 0$, which implies $V = m\pi$, where m is an integer. In particular, considering $m = 0$ and sweeping $n_1 \rightarrow n_0$, there are always at least two modes—one TE and one TM—as long as $n_1 > n_0$. Antisymmetric or odd modes, on the other hand, must satisfy $\cos(V) = 0$, which implies $V = (m\pi \pm \pi/2)$. From this condition, it follows that the first pair of excited modes ($m = 0$) exists whenever $\lambda \leq \lambda_c \equiv 4a \sqrt{n_1^2 - n_0^2}$. Written compactly for the

m -th mode:

$$(\lambda_c)_m = \frac{4a}{m-1} \sqrt{n_1^2 - n_0^2},$$

which for $a = 4 \mu\text{m}$ and $\Delta n = 5 \times 10^{-4}$ implies a cutoff wavelength for the second mode of $\lambda_c \approx 615 \text{ nm}$.

2.3 Analytical solutions for circular optical fiber

In the previous section, the simplest system in which dielectric waveguides can be discussed was studied. The next step in complexity involves circular waveguides. For this purpose, it will be considered that the refractive index varies radially according to:

$$n(\rho) = \begin{cases} n_1, & \text{if } \rho \leq a \\ n_0, & \text{if } \rho > a \end{cases},$$

where the tuple (ρ, ϕ, z) defines the cylindrical coordinates most appropriate for this problem.

When considering the longitudinal components $\Psi = \{E_z, H_z\}$ of the electric and magnetic fields and using the method of separation of variables with $\Psi = R(\rho)\Phi(\phi)e^{ik_z z}$, equations (2.6) and (2.7) take the form:

$$\begin{aligned} \left[\frac{\partial^2}{\partial \rho^2} + \frac{\partial}{\rho \partial \rho} + \frac{\partial^2}{\rho^2 \partial \phi^2} + (k_0^2 n^2 - k_z^2) \right] R(\rho)\Phi(\phi) &= 0 \\ \rho^2 \frac{d^2 R}{R d\rho^2} + \rho \frac{dR}{R d\rho} + \rho^2 (k_0^2 n^2 - k_z^2) + \underbrace{\frac{d^2 \Phi}{\Phi d\phi^2}}_{-\ell^2} &= 0 \\ \therefore \Phi(\phi) &= A e^{i\ell\phi} \end{aligned}$$

After imposing periodicity conditions $\Phi(\phi) = \Phi(\phi + 2\pi)$, it necessarily follows that ℓ is an integer. Consequently, the equation for $R(\rho)$ is of the integer Bessel type. Therefore, seeking solutions such that $k_0^2 n_0^2 < \beta_z^2 < k_0^2 n_1^2$ and defining again $\alpha^2 \equiv k_0^2 n_1^2 - k_z^2$ y $\beta^2 \equiv k_z^2 - k_0^2 n_0^2$ we have:

$$\begin{aligned} \frac{d^2 R}{d\rho^2} + \frac{1}{\rho} \frac{dR}{d\rho} + \left(k_0^2 n^2 - k_z^2 - \frac{\ell^2}{\rho^2} \right) R &= 0 \\ \therefore R(\rho) &= \begin{cases} C_1 J_\ell(\alpha\rho) + D_1 Y_\ell(\alpha\rho), & \text{if } \rho \leq a \\ C_2 K_\ell(\beta\rho) + D_2 I_\ell(\beta\rho), & \text{if } \rho > a \end{cases}. \end{aligned}$$

It is necessary to impose $D_1 = D_2 = 0$ or the solution to be finite at $\rho = 0$ and as $\rho \rightarrow +\infty$. That is, the radial part of the solution is:

$$R(\rho) = \begin{cases} C_1 J_\ell(\alpha\rho), & \text{if } \rho \leq a \\ C_2 K_\ell(\beta\rho), & \text{if } \rho > a \end{cases}.$$

In this case, to impose the continuity conditions on $\mathbf{E}_{\parallel} = E_{\phi}\hat{\phi} + E_z\hat{z}$ and $\mathbf{H}_{\parallel} = H_{\phi}\hat{\phi} + H_z\hat{z}$, it becomes necessary to relate the remaining field components to E_z and H_z , for which equations (2.12) are required.

Since

$$\nabla_{\perp}\Psi = \begin{cases} \Psi_0^1 \left[\hat{\rho}\alpha J'_{\ell}(\alpha\rho) + i\hat{\phi}\ell J_{\ell}(\alpha\rho)/\rho \right] e^{i\ell\phi} e^{ik_z z}, & \text{if } \rho \leq a \\ \Psi_0^0 \left[\hat{\rho}\beta K'_{\ell}(\beta\rho) + i\hat{\phi}\ell K_{\ell}(\alpha\rho)/\rho \right] e^{i\ell\phi} e^{ik_z z}, & \text{if } \rho > a \end{cases}$$

Separating by components and substituting:

$$\begin{aligned} H_z &= e^{i\ell\phi} e^{ik_z z} \begin{cases} H_0^1 J_{\ell}(\alpha\rho), & \text{if } \rho \leq a \\ H_0^0 K_{\ell}(\beta\rho), & \text{if } \rho > a \end{cases} \\ H_r &= \frac{ie^{i\ell\phi} e^{ik_z z}}{k_0^2 n^2 - k_z^2} \begin{cases} k_z \alpha H_0^1 J'_{\ell}(\alpha\rho) - i\omega\varepsilon_0 n^2 \ell E_0^1 J_{\ell}(\alpha\rho)/\rho, & \text{if } \rho \leq a \\ k_z \beta H_0^0 K'_{\ell}(\beta\rho) - i\omega\varepsilon_0 n^2 \ell E_0^0 K_{\ell}(\beta\rho)/\rho, & \text{if } \rho > a \end{cases} \\ H_{\phi} &= \frac{ie^{i\ell\phi} e^{ik_z z}}{k_0^2 n^2 - k_z^2} \begin{cases} ik_z \ell H_0^1 J_{\ell}(\alpha\rho)/\rho + \omega\varepsilon_0 n^2 \alpha E_0^1 J'_{\ell}(\alpha\rho), & \text{if } \rho \leq a \\ ik_z \ell H_0^0 K_{\ell}(\beta\rho)/\rho + \omega\varepsilon_0 n^2 \beta E_0^0 K'_{\ell}(\beta\rho), & \text{if } \rho > a \end{cases} \\ E_z &= e^{i\ell\phi} e^{ik_z z} \begin{cases} E_0^1 J_{\ell}(\alpha\rho), & \text{if } \rho \leq a \\ E_0^0 K_{\ell}(\beta\rho), & \text{if } \rho > a \end{cases} \\ E_r &= \frac{ie^{i\ell\phi} e^{ik_z z}}{k_0^2 n^2 - k_z^2} \begin{cases} k_z \alpha E_0^1 J'_{\ell}(\alpha\rho) + i\omega\mu_0 \ell H_0^1 J_{\ell}(\alpha\rho)/\rho, & \text{if } \rho \leq a \\ k_z \beta E_0^0 K'_{\ell}(\beta\rho) + i\omega\mu_0 \ell H_0^0 K_{\ell}(\beta\rho)/\rho, & \text{if } \rho > a \end{cases} \\ E_{\phi} &= \frac{ie^{i\ell\phi} e^{ik_z z}}{k_0^2 n^2 - k_z^2} \begin{cases} ik_z \ell E_0^1 J_{\ell}(\alpha\rho)/\rho - \omega\mu_0 \alpha H_0^1 J'_{\ell}(\alpha\rho), & \text{if } \rho \leq a \\ ik_z \ell E_0^0 K_{\ell}(\beta\rho)/\rho - \omega\mu_0 \beta H_0^0 K'_{\ell}(\beta\rho), & \text{if } \rho > a \end{cases} \end{aligned}$$

Then, imposing continuity in z and ϕ :

$$H_0^1 J_{\ell}(\alpha a) = H_0^0 K_{\ell}(\beta a) \quad (2.17)$$

$$E_0^1 J_{\ell}(\alpha a) = E_0^0 K_{\ell}(\beta a) \quad (2.18)$$

$$-\omega\varepsilon_0 n_1^2 \alpha \beta^2 a E_0^1 J'_{\ell}(\alpha a) - ik_z \ell \beta^2 H_0^1 J_{\ell}(\alpha a) = \omega\varepsilon_0 n_0^2 \alpha^2 \beta a E_0^0 K'_{\ell}(\beta a) + ik_z \ell \alpha^2 H_0^0 K_{\ell}(\beta a) \quad (2.19)$$

$$-ik_z \ell \beta^2 E_0^1 J_{\ell}(\alpha a) + \omega\mu_0 \alpha \beta^2 a H_0^1 J'_{\ell}(\alpha a) = ik_z \ell \alpha^2 E_0^0 K_{\ell}(\beta a) - \omega\mu_0 \alpha^2 \beta a H_0^0 K'_{\ell}(\beta a) \quad (2.20)$$

Seeking non-trivial solutions:

$$\begin{vmatrix} K_{\ell}(\beta a) & -J_{\ell}(\alpha a) & 0 & 0 \\ 0 & 0 & K_{\ell}(\beta a) & -J_{\ell}(\alpha a) \\ ik_z \ell \alpha^2 K_{\ell}(\beta a) & ik_z \ell \beta^2 J_{\ell}(\alpha a) & \omega\varepsilon_0 n_0^2 \alpha^2 \beta a K'_{\ell}(\beta a) & \omega\varepsilon_0 n_1^2 \alpha \beta^2 a J'_{\ell}(\alpha a) \\ \omega\mu_0 \alpha^2 \beta a K'_{\ell}(\beta a) & \omega\mu_0 \alpha \beta^2 a J'_{\ell}(\alpha a) & -ik_z \ell \alpha^2 K_{\ell}(\beta a) & -ik_z \ell \beta^2 J_{\ell}(\alpha a) \end{vmatrix} = 0$$

Finally, the transcendental equation satisfied by α , β and k_z is:

$$\left(\frac{J'_\ell(\alpha a)}{\alpha a J_\ell(\alpha a)} + \frac{K'_\ell(\beta a)}{\beta a K_\ell(\beta a)} \right) \left(n_1^2 \frac{J'_\ell(\alpha a)}{\alpha a J_\ell(\alpha a)} + n_0^2 \frac{K'_\ell(\beta a)}{\beta a K_\ell(\beta a)} \right) = \ell^2 \left[\left(\frac{1}{\alpha a} \right)^2 + \left(\frac{1}{\beta a} \right)^2 \right] \left(\frac{k_z}{k_0} \right)^2. \quad (2.21)$$

Since, in principle, the values of k_z are already determined by the equation above, it is possible to obtain two relations between H_0^1 and E_0^1 :

$$\frac{E_0^1}{H_0^1} = -\frac{ik_z \ell}{\omega \epsilon_0} \left[\left(\frac{1}{\alpha a} \right)^2 + \left(\frac{1}{\beta a} \right)^2 \right] \left[n_1^2 \frac{J'_\ell(\alpha a)}{\alpha a J_\ell(\alpha a)} + n_0^2 \frac{K'_\ell(\beta a)}{\beta a K_\ell(\beta a)} \right]^{-1}, \quad (2.22)$$

$$\frac{H_0^1}{E_0^1} = \frac{ik_z \ell}{\omega \mu_0} \left[\left(\frac{1}{\alpha a} \right)^2 + \left(\frac{1}{\beta a} \right)^2 \right] \left[\frac{J'_\ell(\alpha a)}{\alpha a J_\ell(\alpha a)} + \frac{K'_\ell(\beta a)}{\beta a K_\ell(\beta a)} \right]^{-1}. \quad (2.23)$$

Taking the square root of the quotient of the equations: (2.22) and (2.23) we have:

$$\frac{E_0^1}{H_0^1} = i \sqrt{\frac{\mu_0}{\epsilon_0}} \frac{\sqrt{\frac{J'_\ell(\alpha a)}{\alpha a J_\ell(\alpha a)} + \frac{K'_\ell(\beta a)}{\beta a K_\ell(\beta a)}}}{\sqrt{n_1^2 \frac{J'_\ell(\alpha a)}{\alpha a J_\ell(\alpha a)} + n_0^2 \frac{K'_\ell(\beta a)}{\beta a K_\ell(\beta a)}}}. \quad (2.24)$$

2.3.1 TE and TM modes

The simplest case to study is by imposing $\ell = 0$. Equation (2.21) implies:

$$\begin{aligned} \frac{J'_0(\alpha a)}{\alpha a J_0(\alpha a)} + \frac{K'_0(\beta a)}{\beta a K_0(\beta a)} &= 0, \quad (\text{TE modes}) \\ n_1^2 \frac{J'_0(\alpha a)}{\alpha a J_0(\alpha a)} + n_0^2 \frac{K'_0(\beta a)}{\beta a K_0(\beta a)} &= 0, \quad (\text{TM modes}) \end{aligned}$$

from equation (2.24), it is straightforward to note that the conditions for transverse modes imply that the longitudinal components become zero in the respective cases: $H_0^1 = 0$ for TE and $E_0^1 = 0$ for TM.

The cutoff conditions occur when $\beta a \rightarrow 0$. Using the asymptotic expressions for Bessel functions with small arguments and their recurrence relations, we have:

$$\frac{\alpha a J_0(\alpha a)}{J_1(\alpha a)} = -\frac{\beta a K_0(\beta a)}{K_1(\beta a)} \approx (\beta a)^2 \ln \left(\frac{\beta a e^\gamma}{2} \right) \rightarrow 0,$$

thus it becomes necessary that $J_0(\alpha a)|_{\alpha a \rightarrow \nu} = 0$. Denoting $x_{0,m} = 2.405, 5.520, 8.654, \dots$ as the m -th zero of the function $J_0(x)$, the cutoff wavelength is given by:

$$(\lambda_c)_{0,m} = 2\pi a \frac{\sqrt{n_1^2 - n_0^2}}{x_{0,m}}, \quad (\text{TE and TM modes}), \quad (2.25)$$

which translates to a cutoff wavelength of: $\lambda_c \approx 616$ nm for the same parameters as in the

section 2.2, $a = 4 \mu\text{m}$ y $\Delta n = 5 \times 10^{-4}$. Contrary to the case of slab waveguides, in optical fibers it is necessary to be below a non-zero maximum cutoff threshold $(\lambda_c)_{0,1}$ for TE or TM modes to exist. As will be seen later, this is because purely transverse modes correspond to excited modes: the fundamental mode is hybrid.

2.3.2 HE and EH modes

Interpreting (2.21) as a quadratic equation in $J'_\ell(\alpha a)/\alpha a J_\ell(\alpha a)$:

$$\frac{J'_\ell(\alpha a)}{\alpha a J_\ell(\alpha a)} = -\left(\frac{n_1^2 + n_0^2}{2n_1^2}\right) \frac{K'_\ell(\beta a)}{\beta a K_\ell(\beta a)} \pm \sqrt{\left(\frac{n_1^2 - n_0^2}{2n_1^2}\right)^2 \left(\frac{K'_\ell(\beta a)}{\beta a K_\ell(\beta a)}\right)^2 + \left(\frac{k_z \ell}{k_0 n_1}\right)^2 \left[\left(\frac{1}{\alpha a}\right)^2 + \left(\frac{1}{\beta a}\right)^2\right]^2}$$

If the recurrence relations of the Bessel functions $J_\ell(r)$, are used, it is possible to obtain two types of solutions that are usually called HE and EH due to the longitudinal field with greater relative value:

$$\frac{J_{\ell-1}(\alpha a)}{\alpha a J_\ell(\alpha a)} = -\left(\frac{n_1^2 + n_0^2}{2n_1^2}\right) \frac{K'_\ell(\beta a)}{\beta a K_\ell(\beta a)} + \frac{\ell}{(\alpha a)^2} - \sqrt{\Delta}, \quad (\text{HE modes}) \quad (2.26)$$

$$\frac{J_{\ell+1}(\alpha a)}{\alpha a J_\ell(\alpha a)} = \left(\frac{n_1^2 + n_0^2}{2n_1^2}\right) \frac{K'_\ell(\beta a)}{\beta a K_\ell(\beta a)} + \frac{\ell}{(\alpha a)^2} - \sqrt{\Delta}, \quad (\text{EH modes}) \quad (2.27)$$

$$\Delta = \left(\frac{n_1^2 - n_0^2}{2n_1^2}\right)^2 \left(\frac{K'_\ell(\beta a)}{\beta a K_\ell(\beta a)}\right)^2 + \left(\frac{k_z \ell}{k_0 n_1}\right)^2 \left[\left(\frac{1}{\alpha a}\right)^2 + \left(\frac{1}{\beta a}\right)^2\right]^2.$$

For $\ell = 0$, the relations obtained for the TE_m (HE_{0m}) and TM_m (EH_{0m}). For $\ell \neq 0$ it becomes necessary to consider the asymptotic expressions of the Bessel functions when $\beta a \rightarrow 0$ and $\alpha a \rightarrow V$:

$$\frac{K'_\ell(x)}{x K_\ell(x)} = -\frac{K_{\ell-1}(x)}{x K_\ell(x)} - \frac{\ell}{x^2} \approx \begin{cases} \ln(xe^\gamma/2) - \frac{1}{x^2} & \text{si } \ell = 1 \\ -\frac{1}{2(\ell-1)} - \frac{\ell}{x^2} & \text{si } \ell > 1 \end{cases}.$$

The case $\ell = 1$ is of special interest. The condition for HE modes is developed as:

$$\frac{\alpha a J_1(\alpha a)}{J_0(\alpha a)} = \left\{ \left(\frac{n_1^2 + n_0^2}{2n_1^2}\right) \left[\ln\left(\frac{2}{e^\gamma \beta a}\right) + \frac{1}{(\beta a)^2} \right] + \frac{1}{(\alpha a)^2} - \sqrt{\Delta} \right\}^{-1} \rightarrow 0.$$

It is sufficient to consider the function $J_1(\alpha a)|_{\alpha a \rightarrow V} = 0$. On the other hand, the EH condition eliminates the zero $x = 0$ from the ratio $\frac{\alpha a J_1(\alpha a)}{J_2(\alpha a)}$ which causes it to be "out of phase" relative

to the HE condition. Using reasoning similar to the $\ell = 0$, case, the cutoff conditions are:

$$(\lambda_c)_{1,m} = 2\pi a \frac{\sqrt{n_1^2 - n_0^2}}{x_{1,m}}, \quad (\text{HE modes}_{1m})$$

$$(\lambda_c)_{1,m} = 2\pi a \frac{\sqrt{n_1^2 - n_0^2}}{x_{1,m+1}}, \quad (\text{EH modes}_{1m})$$

with $x_{1,m} = 0, 3.832, 7.016, 10.173, \dots$. In particular, the HE_{11} mode always exists. The next largest finite cutoff wavelengths are $\lambda_c \approx 252$ nm for the HE_{12} and EH_{11} modes.

The case $\ell \geq 2$ has a different development due to the asymptotic forms involved and will not be relevant for this thesis. However, they are included in Figure 2.4 for completeness.

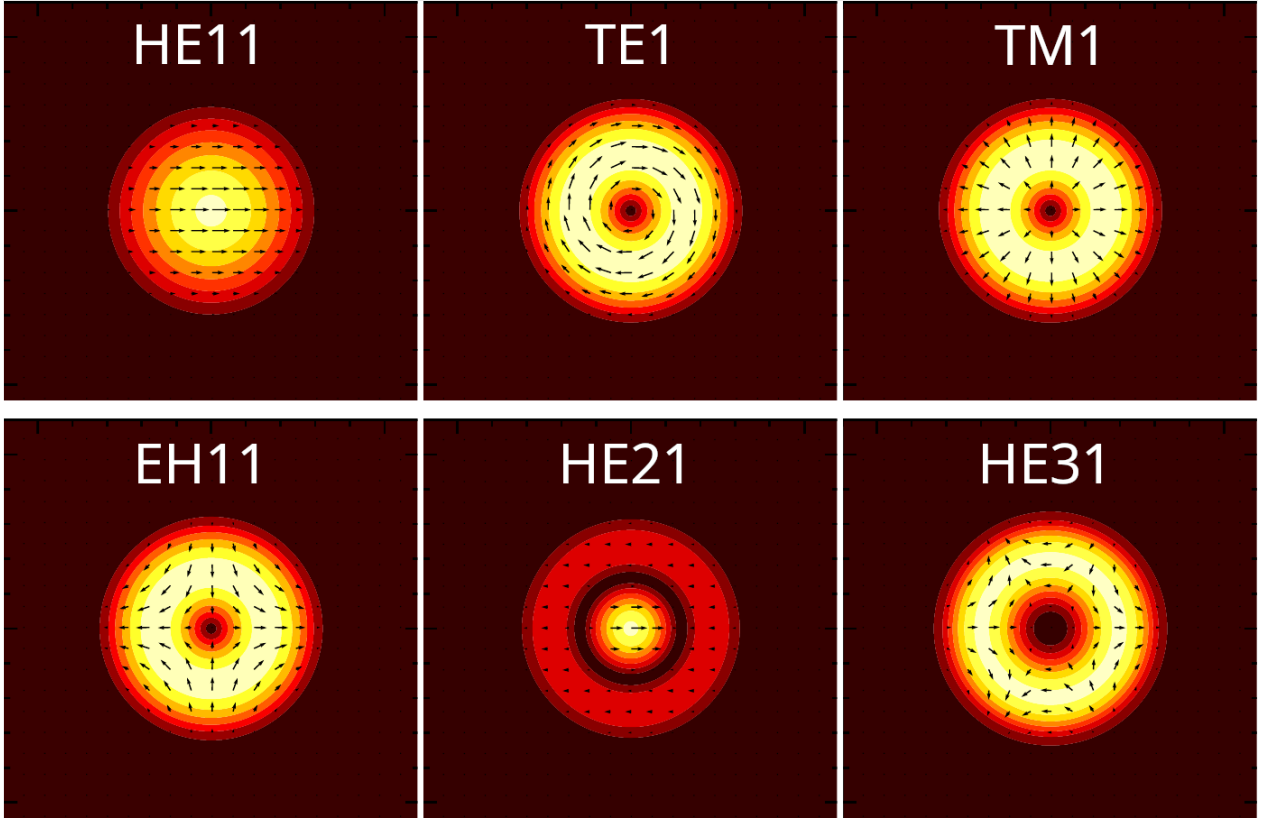


Figure 2.4: First guided normal modes for a circular waveguide or optical fiber.

2.4 Normal modes in waveguides

If the waveguide structure does not vary in the $\hat{\mathbf{z}}$ direction, the solution for the electric field can be written, by separation of variables, as a plane wave of the form $\mathbf{E}(\mathbf{r}) = \mathbf{E}_v(x, y)e^{i\beta_v z}$. In turn, it is convenient to separate the Laplacian operator as $\nabla^2 = \nabla_{\perp}^2 + \frac{\partial^2}{\partial z^2}$.

Defining the operator D_{ij} such that $D_{ij}E_j \equiv \partial_i \left(\frac{\partial_j n^2}{n^2} E_j \right)$, the transverse part of the Helmholtz

equations (2.6) can be written as:

$$\begin{pmatrix} \nabla_{\perp}^2 + k_0^2 n^2 + D_{xx} & D_{xy} \\ D_{yx} & \nabla_{\perp}^2 + k_0^2 n^2 + D_{yy} \end{pmatrix} \begin{pmatrix} E_x \\ E_y \end{pmatrix} = \beta_v^2 \begin{pmatrix} E_x \\ E_y \end{pmatrix}. \quad (2.28)$$

Equation (2.28) constitutes an eigenvalue problem for β_v^2 , whose eigenfunctions $\mathbf{E}_v^{\perp}(x, y)$ describe the transverse profiles of the guided modes. In general, this is a coupled vectorial second-order system, whose resolution requires numerical techniques. However, in the *weak guidance* regime, where the refractive index varies slightly relative to a homogeneous background n_0 , the system can be decoupled and treated as a scalar problem for a dominant component of the electric field².

Under this approximation, quasi-transverse modes are typically considered, where the electric field is primarily polarized in a fixed direction (for example, E_y), and the Helmholtz equation reduces to:

$$\left[\nabla_{\perp}^2 + k_0^2 n^2(x, y) \right] \phi_v(x, y) = \beta_v^2 \phi_v(x, y), \quad (2.29)$$

where $\phi_v(x, y)$ represents the transverse field profile. This approximation is valid for many experimental geometries, especially when the light is linearly polarized and the index variations do not induce coupling between orthogonal polarizations.

The modes obtained from this equation allow for the calculation of propagation constants β_v , spatial field profiles $\phi_v(x, y)$, and other relevant quantities such as confinement factors or group velocities. Furthermore, these modes serve as a basis for subsequent numerical methods, such as Eigenmode Expansion (EME) or Coupled-Mode Theory (CMT), used to describe the dynamics in photonic lattices.

2.5 Coupled-Mode Theory

2.5.1 Derivation from a Variational Principle

From equations (2.8) and (2.9), it is possible to express the propagation constant k_z in terms of the Poynting vector $\mathbf{S} = \frac{1}{2} \text{Re}\{\mathbf{E} \times \mathbf{H}^*\}$, following a derivation analogous to that presented in [32].

$$k_z = \frac{\frac{1}{4i} \iint \left[(-\nabla_{\perp} \times \mathbf{E} + i\omega\mu_0 \mathbf{H}) \cdot \mathbf{H}^* + (\nabla_{\perp} \times \mathbf{H} + i\omega\epsilon_0 n^2 \mathbf{E}) \cdot \mathbf{E}^* \right] dx dy}{\frac{1}{4} \iint (\mathbf{E} \times \mathbf{H}^* + \mathbf{E}^* \times \mathbf{H}) \cdot \hat{\mathbf{z}} dx dy}. \quad (2.30)$$

²see Appendix B.

When proposing a solution in the form of a superposition of modes from the individual waveguides, such as:

$$\mathbf{E} = \sum_i a_i \mathbf{e}_i, \quad \mathbf{H} = \sum_i a_i \mathbf{h}_i,$$

where a_i represents the amplitude of the i -th mode, the coefficients remain undetermined but subject to minimizing the expression for k_z . Substituting these expansions into (2.30), a simplified expression for the propagation constant of the system k_z is obtained:

$$(\mathbf{E} \times \mathbf{H}^* + \mathbf{E}^* \times \mathbf{H}) \cdot \hat{\mathbf{z}} = \sum_{ij} a_i^* (\mathbf{e}_j \times \mathbf{h}_i^* + \mathbf{e}_i^* \times \mathbf{h}_j) \cdot \hat{\mathbf{z}} a_j \equiv \sum_{ij} a_i^* p_{ij} a_j.$$

The integrand of the numerator is expanded as:

$$\begin{aligned} \text{integrand of the numerator} &= i \sum_{ij} \left[a_i^* k_z^j (\hat{\mathbf{z}} \times \mathbf{e}_j) \cdot \mathbf{h}_i^* a_j + a_j (\omega \epsilon_0 (n^2 - n_j^2) \mathbf{e}_j - k_z^j \hat{\mathbf{z}} \times \mathbf{h}_j) \cdot \mathbf{e}_i^* a_i^* \right], \\ &= i \sum_{ij} a_i^* \left[k_z^j p_{ij} + \omega \epsilon_0 (n^2 - n_j^2) \mathbf{e}_j \cdot \mathbf{e}_i^* \right] a_j, \end{aligned}$$

where k_z^j is the propagation constant of the j -th isolated mode³.

Defining the following fundamental quantities:

$$P_{ij} \equiv \frac{1}{4} \iint (\mathbf{e}_j \times \mathbf{h}_i^* + \mathbf{e}_i^* \times \mathbf{h}_j) \cdot \hat{\mathbf{z}} \, dx dy, \quad (2.31)$$

$$= \frac{1}{4\omega\mu_0} \iint \left[(k_z^i + k_z^j) (\mathbf{e}_i^{\perp*} \cdot \mathbf{e}_j^{\perp}) + i (\mathbf{e}_j^{\perp} \cdot \nabla_{\perp} e_{z,i}^* - \mathbf{e}_i^{\perp*} \cdot \nabla_{\perp} e_{z,j}) \right] dx dy, \quad (2.32)$$

$$H_{ij} \equiv P_{ij} k_z^j + \frac{\omega \epsilon_0}{4} \iint (n^2 - n_j^2) \mathbf{e}_j \cdot \mathbf{e}_i^* \, dx dy, \quad (2.33)$$

the expression (2.30) for the propagation constant k_z can be written compactly as a Rayleigh-Ritz quotient:

$$k_z = \frac{\sum_{ij} a_i^* H_{ij} a_j}{\sum_{ij} a_i^* P_{ij} a_j}. \quad (2.34)$$

Differentiating with respect to a_k^* to optimize the value of k_z yields:

$$\frac{\partial k_z}{\partial a_k^*} = \frac{\sum_{ij} H_{ij} a_j \delta_{ik}}{\sum_{ij} a_i^* P_{ij} a_j} - \frac{(\sum_{ij} a_i^* H_{ij} a_j)(\sum_{ij} \delta_{ik} P_{ij} a_j)}{(\sum_{ij} a_i^* P_{ij} a_j)^2} = \frac{\sum_j (H_{jk} - k_z P_{kj}) a_j}{\sum_{ij} a_i^* P_{ij} a_j} \stackrel{!}{=} 0. \quad (2.35)$$

³in general, $k_z \neq k_z^j$.

Recovering $k_z \rightarrow -i\frac{\partial}{\partial z}$, the equations for N non-orthogonal coupled modes are obtained:

$$-i \sum_j P_{kj} \frac{da_j}{dz} = \sum_j H_{kj} a_j, \text{ with } k = 1, 2, \dots, N. \quad (2.36)$$

Clearly, from the expression (2.31) for P_{ij} , Hermiticity is satisfied. At first glance, it may seem that H_{ij} is not Hermitian, but let us see that it indeed is. To do this, it suffices to consider the difference $H_{ij} - H_{ji}^*$ and note that it vanishes:

$$\begin{aligned} H_{ij} - H_{ji}^* &= P_{ij} k_z^j - P_{ji}^* k_z^i + \frac{\omega \epsilon_0}{4} \iint (n_i^2 - n_j^2) \mathbf{e}_i^* \cdot \mathbf{e}_j dx dy \\ &= \frac{1}{4} \iint (k_z^j - k_z^i) (\mathbf{e}_j \times \mathbf{h}_i^* + \mathbf{e}_i^* \times \mathbf{h}_j) \cdot \hat{\mathbf{z}} + \omega \epsilon_0 (n_i^2 - n_j^2) \mathbf{e}_j \cdot \mathbf{e}_i^* dx dy \\ &= \frac{1}{4} \iint (i \nabla_\perp \times \mathbf{e}_j + \omega \mu_0 \mathbf{h}_j) \cdot \mathbf{h}_i^* - (i \nabla_\perp \times \mathbf{h}_j - \omega \epsilon_0 n_j^2 \mathbf{e}_j) \cdot \mathbf{e}_i^* dx dy \\ &\quad - \frac{1}{4} \iint (i \nabla_\perp \times \mathbf{e}_i^* + \omega \mu_0 \mathbf{h}_i^*) \cdot \mathbf{h}_j + (i \nabla_\perp \times \mathbf{h}_i^* + \omega \epsilon_0 n_i^2 \mathbf{e}_i^*) \cdot \mathbf{e}_j dx dy \\ &\quad + \frac{\omega \epsilon_0}{4} \iint (n_i^2 - n_j^2) \mathbf{e}_j \cdot \mathbf{e}_i^* dx dy \\ &= \frac{i}{4} \iint (\nabla_\perp \times \mathbf{e}_j) \cdot \mathbf{h}_i^* - (\nabla_\perp \times \mathbf{h}_j) \cdot \mathbf{e}_i^* + (\nabla_\perp \times \mathbf{e}_i^*) \cdot \mathbf{h}_j - (\nabla_\perp \times \mathbf{h}_i^*) \cdot \mathbf{e}_j dx dy \\ &= \frac{i}{4} \iint \nabla_\perp \cdot (\mathbf{e}_j \times \mathbf{h}_i^* + \mathbf{e}_i^* \times \mathbf{h}_j) dx dy = \frac{i}{4} \oint_C (\mathbf{e}_j \times \mathbf{h}_i^* + \mathbf{e}_i^* \times \mathbf{h}_j) \cdot \hat{\mathbf{n}} ds \\ &= 0, \end{aligned}$$

where it has been used that the fields must decay to zero at infinity. Equations (2.36) can be derived from a Principle of Least Action after defining the discrete field Lagrangian L of the Schrödinger type:

$$L = - \sum_{ij} a_i^* \left(i P_{ij} \frac{d}{dz} + H_{ij} \right) a_j. \quad (2.37)$$

The generalized momenta of this Lagrangian are $\Pi_k = \frac{\partial L}{\partial \dot{a}_k} = -i \sum_j a_j^* P_{jk}$, so the associated Hamiltonian H is:

$$H = \sum_j \Pi_j \dot{a}_j - L = \sum_{ij} -i a_i^* P_{ij} \dot{a}_j + a_i^* \left(i P_{ij} \frac{da_j}{dz} + H_{ij} a_j \right) = \sum_{ij} a_i^* H_{ij} a_j. \quad (2.38)$$

Since the Lagrangian does not depend explicitly on z , the Hamiltonian H is a conserved

quantity. Varying the Lagrangian yields:

$$\begin{aligned}
\delta L &= \sum_{ij} \frac{\partial L}{\partial a_j} \delta a_j + \frac{\partial L}{\partial a_i^*} \delta a_i^* + \frac{\partial L}{\partial \dot{a}_j} \delta \dot{a}_j + \frac{\partial L}{\partial \dot{a}_i^*} \delta \dot{a}_i^* \\
&= \sum_{ij} \left(\frac{\partial L}{\partial a_j} - \frac{d}{dz} \frac{\partial L}{\partial \dot{a}_j} \right) \delta a_j + \left(\frac{\partial L}{\partial a_i^*} - \frac{d}{dz} \frac{\partial L}{\partial \dot{a}_i^*} \right) \delta a_i^* + \frac{d}{dz} \left(\frac{\partial L}{\partial \dot{a}_j} \delta a_j + \frac{\partial L}{\partial \dot{a}_i^*} \delta a_i^* \right) \\
&\Rightarrow \frac{d}{dz} \sum_{ij} \left(\frac{\partial L}{\partial \dot{a}_j} \delta a_j + \frac{\partial L}{\partial \dot{a}_i^*} \delta a_i^* \right) = 0 .
\end{aligned}$$

The pair of transformations associated with the unitary group $U(1)$, $a_j \rightarrow a'_j = e^{i\phi} a_j$, $a_i^* \rightarrow a'^*_i = e^{-i\phi} a_i^*$ leave the Lagrangian invariant. If an infinitesimal variation $\phi \ll 1$ is taken, then $\delta a_j = i\phi a_j$ and $\delta a_i^* = -i\phi a_i^*$, is taken, then P , which is identified with the total power of the system and is directly related to the Poynting vector, is:

$$P = \sum_{ij} a_i^* P_{ij} a_j = \iint \mathbf{S} \cdot \hat{\mathbf{z}} dx dy . \quad (2.39)$$

Thus, there are two conserved quantities in the dynamics, H y P , which will be useful for verifying the validity of numerical solutions to equation (2.36).

2.5.2 TE Dimer in Slab-Type Waveguides

Using the equations for the transverse components (2.12) in the case of fundamental TE modes (2.14), we have:

$$\begin{aligned}
\mathbf{e}_{j\perp} &= \hat{\mathbf{y}} \frac{i\omega\mu_0 H_{a1}}{k_0^2 n_j^2 - (k_z^j)^2} \begin{cases} -\alpha \cos(\alpha(x - x_j)), & |x - x_j| \leq a \\ \beta \sin(\alpha a) e^{-\beta(|x - x_j| - a)}, & |x - x_j| > a \end{cases} , \\
\mathbf{h}_{j\perp} &= \hat{\mathbf{x}} \frac{ik_z^j H_{a1}}{k_0^2 n_j^2 - (k_z^j)^2} \begin{cases} \alpha \cos(\alpha(x - x_j)), & |x - x_j| \leq a \\ -\beta \sin(\alpha a) e^{-\beta(|x - x_j| - a)}, & |x - x_j| > a \end{cases} ,
\end{aligned}$$

with $x_j = jd$, $d \geq 2a$ and $L = \int dy$. The off-diagonal elements have the form:

$$\begin{aligned}
(\mathbf{e}_{j\perp} \times \mathbf{h}_{i\perp}^*) \cdot \hat{\mathbf{z}} &= \frac{k_z^i \omega \mu_0 H_{a1}^2 \beta \sin(\alpha a)}{(k_0^2 n_j^2 - k_z^2)(k_0^2 n_i^2 - k_z^2)} \begin{cases} \alpha \cos(\alpha(x - x_i)) e^{-\beta(|x - x_j| - a)}, & |x - x_i| \leq a \\ i \leftrightarrow j, & |x - x_j| \leq a \\ \beta \sin(\alpha a) e^{-\beta(|x - x_i| + |x - x_j| - 2a)}, & \text{otherwise} \end{cases} , \\
P_{ij} &= \frac{L k_z^i k_0 \mu_0 c H_{a1}^2 \sin^2(\alpha a) e^{-\beta d} e^{\beta a}}{2\beta} \left[\frac{e^{-\beta a} + \beta(d - 2a) e^{\beta a}}{\beta^2} - \frac{2 \cosh(\beta a)}{\alpha^2 + \beta^2} \right] , \\
\tilde{H}_{ij} \equiv H_{ij} - P_{ij} k_z^j &= \frac{L k_0 \mu_0 c H_{a1}^2}{2\beta} \sin^2(\alpha a) e^{2\beta a} e^{-\beta d} .
\end{aligned}$$

The diagonal elements have the form:

$$\begin{aligned} (\mathbf{e}_{j\perp} \times \mathbf{h}_{j\perp}^*) \cdot \hat{\mathbf{z}} &= \frac{k_z^j \omega \mu_0 H_{a1}^2}{(k_0^2 n_j^2 - k_z^2)^2} \begin{cases} \alpha^2 \cos^2(\alpha(x - x_j)), & |x - x_j| \leq a \\ \beta^2 \sin^2(\alpha a) e^{2\beta a} e^{-2\beta|x-x_j|}, & |x - x_j| > a \end{cases}, \\ P_{jj} &= \frac{L k_z^j k_0 \mu_0 c H_{a1}^2 a}{2\alpha^2} \left[1 + \frac{\sin^2(\alpha a)}{a\beta^3} k_0^2 (n_1^2 - n_0^2) \right], \\ \tilde{H}_{jj} \equiv H_{jj} - P_{jj} k_z^j &= \frac{L k_0^3 \mu_0 c H_{a1}^2 \sin^2(\alpha a) e^{2\beta a} e^{-2\beta d}}{4\beta^3} (n_1^2 - n_0^2) \sinh(2\beta a). \end{aligned}$$

The dynamics is governed by the coupled system of equations (2.36), which, after pre-multiplying by the inverse of the matrix P_{ij} , takes the compact form:

$$-i \frac{d}{dz} \begin{pmatrix} a_1 \\ a_2 \end{pmatrix} = \begin{pmatrix} \tilde{k} & C \\ C & \tilde{k} \end{pmatrix} \begin{pmatrix} a_1 \\ a_2 \end{pmatrix},$$

with, for example, $\tilde{k} \equiv k_z^{\text{TE}} + \delta k$, $k_z^{\text{TE}} \sim 1.3 \times 10^5 \text{ cm}^{-1}$, $C \equiv \frac{P_{ii}\tilde{H}_{ij} - P_{ij}\tilde{H}_{ii}}{P_{ii}^2 - P_{ij}^2} \sim 1 \text{ cm}^{-1}$ and $\delta k \equiv \frac{P_{ii}\tilde{H}_{ii} - P_{ij}\tilde{H}_{ij}}{P_{ii}^2 - P_{ij}^2} \sim -0.02 \text{ cm}^{-1}$ for $\lambda = 730 \text{ nm}$, $n_1 = n_0 + 4 \times 10^{-4}$ and a distance between waveguides of $d = 18 \text{ }\mu\text{m}$. The matrix $\hat{P}^{-1}\hat{H}$ can be written in terms of the Pauli matrices as $\tilde{k}I + C\sigma_x$, which allows using their properties to solve the system dynamics:

$$\begin{pmatrix} a_1(z) \\ a_2(z) \end{pmatrix} = e^{i[\tilde{k}I + C\sigma_x]z} \begin{pmatrix} a_1(0) \\ a_2(0) \end{pmatrix} = e^{i\tilde{k}z} \begin{pmatrix} \cos(Cz) & i \sin(Cz) \\ i \sin(Cz) & \cos(Cz) \end{pmatrix} \begin{pmatrix} a_1(0) \\ a_2(0) \end{pmatrix}.$$

One way to experimentally determine the coupling value C is by individually exciting one mode. With this, the ratio between the powers $|a_1(z)|^2$ and $|a_2(z)|^2$ allows solving for the coupling given a known propagation distance $z = L < \frac{\pi}{2C}$:

$$C = \frac{1}{L} \tan^{-1} \left(\left| \frac{a_2(L)}{a_1(L)} \right|^2 \right). \quad (2.40)$$

2.5.3 Bands and Topology: Photonic Su-Schrieffer-Heeger Lattice

Although it is possible to reformulate Maxwell's equations as an eigenvalue problem in analogy with quantum mechanics to establish an analogue to Bloch's theorem [33], the Hermitian matrix $\hat{C} \equiv \hat{P}^{-1}\hat{H}$ from equation (2.36) provides sufficient justification to invoke it: It is possible to express the solutions of the system in a quasimomentum basis whose periodicity matches that of the matrix $\hat{C}$. To illustrate this, the celebrated Su-Schrieffer-Heeger (SSH) model will be used, which is one of the simplest systems exhibiting *topological edge states* [31, 34, 35]. Originally developed to explain the formation of localized electronic states in polyacetylene, it involves considering only two types of coupling: one strong (double bond) and one weak (single bond). In terms of Solid State Physics, it corresponds to a one-dimensional lattice with a two-site basis, whose modal amplitudes are denoted a_n and b_n .

Figure 2.5 illustrates the model to be studied, which corresponds to the following Hamiltonian H .

$$H = \sum_n (tb_n^* a_n + t' a_{n+1}^* b_n + c.c.) .$$

Under periodic boundary conditions (Born–von Karman), it is possible to diagonalize the

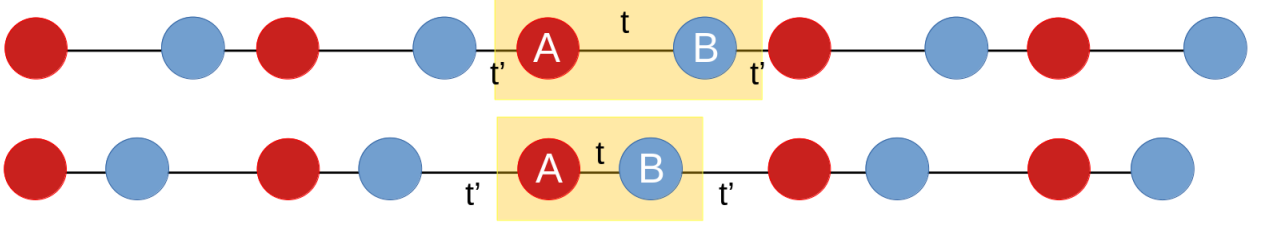


Figure 2.5: Schematic of the SSH model. The unit cell is enclosed in yellow, where sites A and B and the intracell (intercell) coupling t (t') are distinguished. Two different configurations are shown.

Hamiltonian in the Bloch basis with $a_n = \frac{1}{\sqrt{N}} \sum_k a_k e^{iknd}$, $b_n = \frac{1}{\sqrt{N}} \sum_k b_k e^{iknd}$ as follows:

$$\begin{aligned} H &= \frac{1}{N} \sum_n \sum_{kk'} \left[(t + t' e^{ikd}) a_k b_{k'}^* e^{i(k-k')nd} + (t + t' e^{-ikd}) a_k^* b_{k'} e^{-i(k-k')nd} \right] \\ &= \sum_k \begin{pmatrix} a_k^* & b_k^* \end{pmatrix} \underbrace{\begin{pmatrix} 0 & t + t' e^{-ikd} \\ t + t' e^{ikd} & 0 \end{pmatrix}}_{\hat{H}(k)} \begin{pmatrix} a_k \\ b_k \end{pmatrix}, \end{aligned}$$

where it has been used that

$$\frac{1}{N} \sum_n e^{i(k-k')nd} = \begin{cases} \frac{N}{N} = 1, & \text{if } k = k' \\ \frac{1}{N} \frac{1 - e^{i(k-k')Nd}}{1 - e^{i(k-k')d}} e^{i(k-k')d} = 0, & \text{if } k \neq k' \end{cases} = \delta_{kk'},$$

since $k, k' \in \left\{ \frac{2\pi l}{Nd}, l = 0, \pm 1, \dots, \pm \frac{N}{2} \right\}$ belong to the 1D reciprocal lattice. The spectrum of $\hat{H}(k)$ is $\lambda_k = \pm \sqrt{t^2 + t'^2 + 2tt' \cos(kd)}$, which would seem to indicate that the system is symmetric between t y t' . However, the picture is not complete without the eigenvectors of $\hat{H}(k)$,

$$\mathbf{v}_{\pm} = \frac{1}{\sqrt{2}} \begin{pmatrix} \pm e^{-i\phi(k)} \\ 1 \end{pmatrix}, \text{ with } \phi(k) = \tan^{-1} \left(\frac{t' \sin(kd)}{t + t' \cos(kd)} \right). \text{ If the vector } \mathbf{d}(k) \equiv \begin{pmatrix} t + t' \cos(kd) \\ t' \sin(kd) \\ 0 \end{pmatrix} \text{ is defined,}$$

it is possible to write the Hamiltonian $\hat{H}(k)$ in terms of the Pauli matrices as $\hat{H}(k) = \mathbf{d} \cdot \boldsymbol{\sigma} = d_x \sigma_x + d_y \sigma_y$. This vector $\mathbf{d}(k)$ is a vectorial representation of the 2×2 bulk Hamiltonian in momentum space. The phase $\phi(k)$ is related to the angle formed by the projection of the vector $\mathbf{d}(k)$ onto the xy plane, $\phi(k) = \tan^{-1} \left(\frac{d_y}{d_x} \right)$. In particular, when $\delta \equiv t/t' < 1$, the vector $\mathbf{d}(k)$ encloses the origin once, while for $\delta > 1$ it does not enclose the origin, as seen in Figure 2.6. Formally, the Zak phases, $\mathcal{Z}_{\pm}$, associated with the bulk eigenstates (a region sufficiently

far from the edges) change depending on the value of δ . By definition [36],

$$\mathcal{Z}_{\pm} = i \oint \mathbf{v}_{\pm}^{\dagger} \frac{d\mathbf{v}_{\pm}}{dk} dk = -\frac{1}{2} \int_{-\frac{\pi}{d}}^{\frac{\pi}{d}} \frac{d\phi(k)}{dk} dk = -\frac{d}{2} \int_{-\frac{\pi}{d}}^{\frac{\pi}{d}} \frac{1 + \delta \cos(kd)}{\delta^2 + 1 + 2\delta \cos(kd)} dk = -\frac{\pi}{2} \left(1 + \frac{1 - \delta^2}{|1 - \delta^2|} \right).$$

That is,

$$\mathcal{Z}_{\pm} = \begin{cases} -\pi, & \text{if } |\delta| < 1 \\ 0, & \text{if } |\delta| > 1 \end{cases}.$$

The change in the Zak phase as the parameter δ varies is known as a *topological transition* since it is not possible to smoothly transition from one regime to the other. This has implications for the system with open boundary conditions (Dirichlet) due to the *bulk-boundary correspondence* [37]. Specifically, as illustrated in Figure 2.7, the topology of the Hamiltonian $\hat{H}(k)$ induces the appearance of zero-energy edge states when open boundary conditions are imposed.

The Hamiltonian of the SSH model exhibits various symmetries: time-reversal, inversion, particle-hole, translational, and chiral. The latter is particularly relevant, as the edge states of the SSH model are *topologically protected* against any disorder that respects chiral symmetry [38]. The chiral operator in question is the Pauli matrix σ_z , since

$$\{\hat{H}(k), \sigma_z\} = \{d_x \sigma_x + d_y \sigma_y, \sigma_z\} = d_x \{\cancel{\sigma_x}, \sigma_z\} + d_y \{\cancel{\sigma_y}, \sigma_z\} \stackrel{0}{=} 0.$$

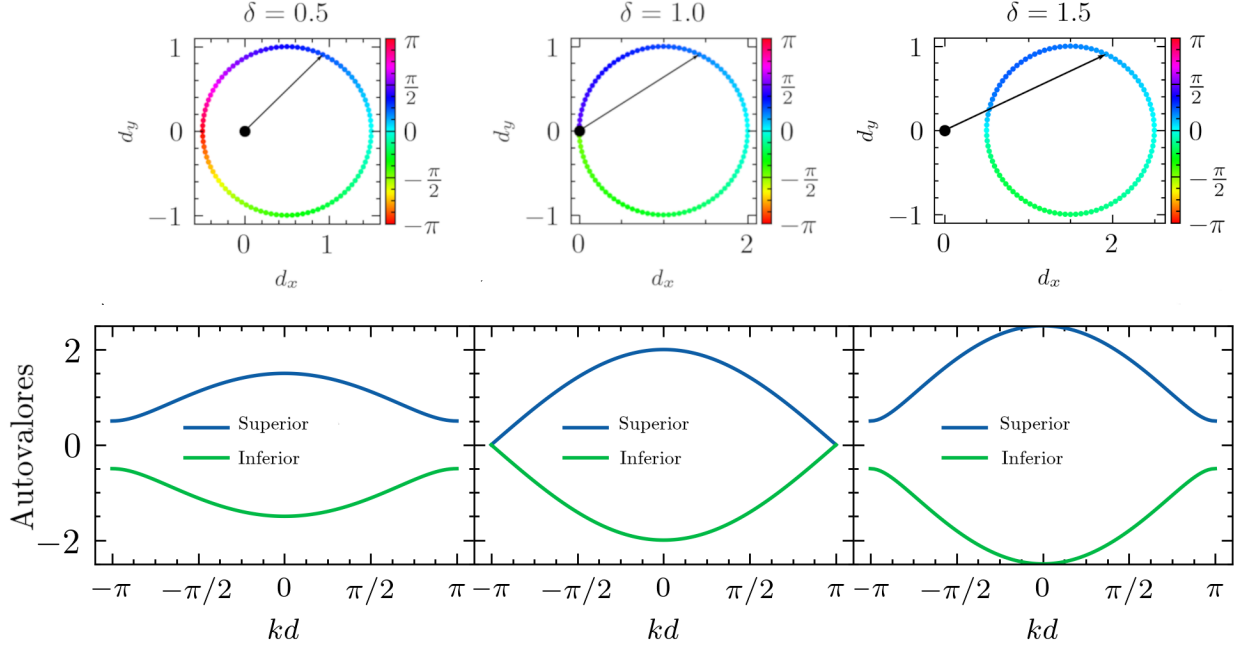


Figure 2.6: Topology of the SSH lattice. Top: Vectors $\mathbf{d}(\mathbf{k})$ and their phase. For $\delta < 1$ ($\delta > 1$), the origin is (not) enclosed. Bottom: Bands as a function of quasimomentum k in the first Brillouin zone for $\delta < 1$, $\delta = 1$ and $\delta > 1$. Here $t' = 1$ is fixed and δ' is varied for a number $N = 100$ of unit cells.

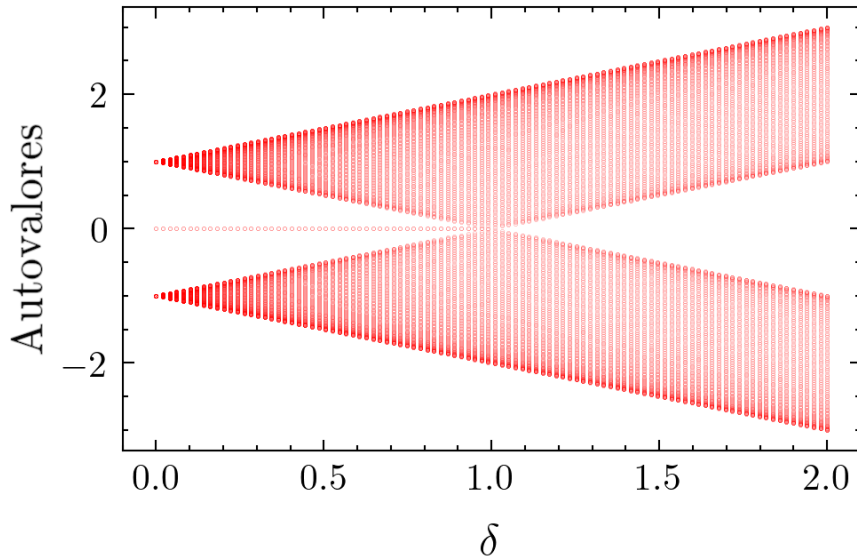


Figure 2.7: Spectrum of the finite SSH lattice. The emergence of zero-energy edge states for $\delta < 1$ is observed. Open boundary conditions as a function of the parameter $\delta = t/t'$, with fixed $t' = 1$ and a number $N = 100$ of unit cells.

3. Numerical Methods

In this chapter, the fundamental numerical methods used to model the electromagnetic behavior in the photonic systems studied in this thesis are presented. Since most of these systems lack exact analytical solutions, especially in the absence of exploitable symmetries, numerical approaches are essential to obtain approximations with controlled precision.

The theoretical starting point is provided by the vectorial Helmholtz equations for the electric and magnetic fields, expressed in Eqs. (2.6) and (2.7), which describe the propagation of electromagnetic waves in dielectric media. By applying the weak guidance approximation, the coupled terms on the right-hand side of both equations can be neglected. This crucial simplification eliminates cross effects between the transverse and longitudinal components of the fields, effectively decoupling the equations and reducing the complex vector problem to a set of independent scalar Helmholtz equations, which are numerically manageable. This scalar formulation is the foundation upon which the computational methods described below are implemented.

$$\left[\nabla^2 + k_0^2 n^2(\mathbf{r}) \right] \Psi(\mathbf{r}) = 0 , \quad (3.1)$$

where equation (3.1) serves not only as a theoretical framework but also as the foundation for the algorithms developed in the following chapters. Its versatility allows for the adaptation of different numerical schemes according to the symmetries of the problem, as will be detailed in the subsequent sections.

3.1 Eigenmode Expansion

This numerical method, developed and implemented during the student's Master's research, is useful when the photonic systems under study are invariant. The solutions to equation (3.1) can be expanded in plane waves with transverse profiles: $\Psi(\mathbf{r}) = \Psi(x, y) \exp(i\beta z)$. With this, each transverse mode must satisfy the following equation to be solved numerically:

$$\left[\nabla_{\perp}^2 + k_0^2 n^2(x, y) \right] \Psi_{\nu}(x, y) = \beta_{\nu}^2 \Psi_{\nu}(x, y) , \quad \text{con } \nabla_{\perp}^2 \equiv \frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} . \quad (3.2)$$

And the total propagated field is a linear combination of the modes Ψ_{ν} :

$$\Psi(\mathbf{r}) = \sum_{\nu} a_{\nu} \Psi_{\nu}(x, y) e^{i\beta_{\nu} z} , \quad \text{con } a_{\nu} \propto \Psi_{\nu}(x, y) \cdot \Psi(x, y, z = 0) . \quad (3.3)$$

Instead of directly integrating the eigenvalue equation (3.2), the strategy will be to discretize space and approximate the transverse Laplacian operator $\nabla_{\perp}^2$ as a matrix, since

$$\frac{\partial^2 \Psi(x, y)}{\partial x^2} \sim \frac{\Psi[i+1, j] - 2\Psi[i, j] + \Psi[i-1, j]}{\Delta x^2} .$$

$\nabla_{\perp}^2 \sim \hat{D}_{xx} \otimes I_y + I_x \otimes \hat{D}_{yy}$ The matrix is null in off-diagonal positions beyond a certain spacing (*sparse-like*), so it is possible to optimize the computation process by using the Python library `scipy.sparse.linalg`, specifically designed for sparse matrix linear algebra. Appendix C contains an implementation of this algorithm in Python under the [GNU GPL v3 license](#).

In Figure 3.1, the numerical method is validated by comparison with the analytical solutions obtained in Subsection 2.2.1. The complexity of the problem is on the order of $O(N^2)$ due to the construction of the $N \times N$ matrices, which is reflected in the dependence of the execution time on the step size $\Delta x \equiv \frac{L}{N-1}$.

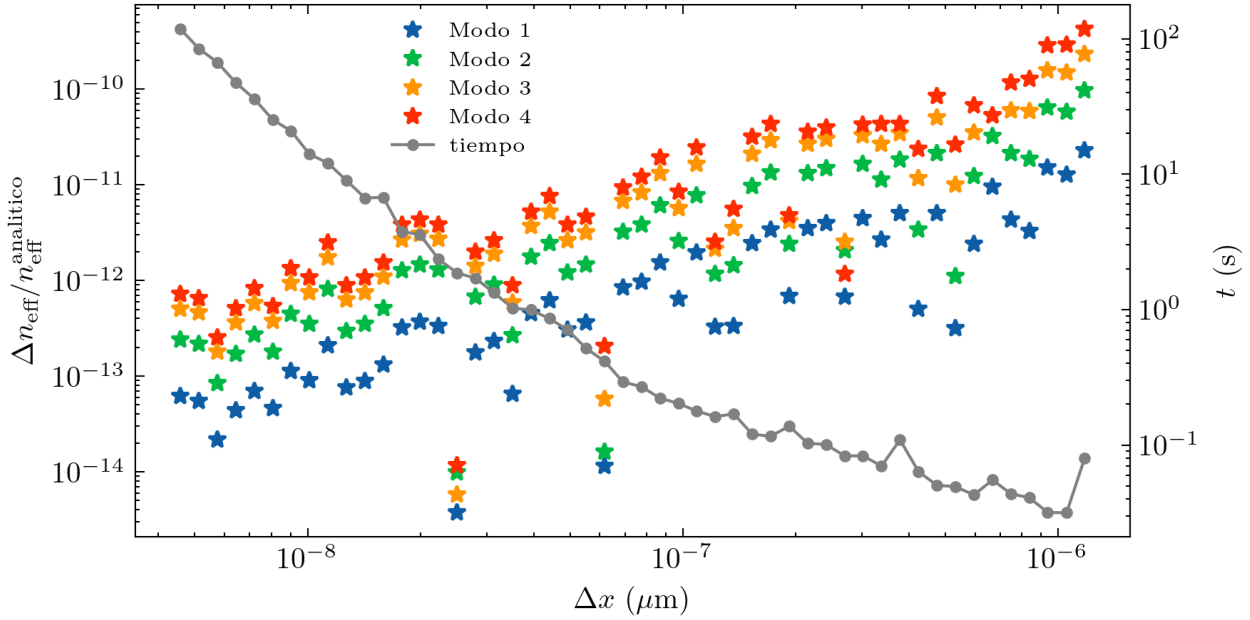


Figure 3.1: Relative error and execution time of the numerical solutions to equation (3.2) compared to the analytical solutions, as a function of the step size Δx .

3.2 Beam Propagation Method

Another way to approach the numerical integration of equation (3.1) involves separating the field into its slow envelope and a rapidly oscillating phase, considering that in the visible range the order of magnitude is $k_0 \sim 10^5 \text{ cm}^{-1}$: $\Psi(\mathbf{r}) = \phi(x, y, z) \exp(ik_0 n_0 z)$. After substituting into equation (3.1), the optical Schrödinger equation is obtained [39]:

$$-2ik_0 n_0 \frac{\partial}{\partial z} \phi(x, y, z) = \left[\nabla_{\perp}^2 + k_0^2 (n^2(\mathbf{r}) - n_0^2) \right] \phi(x, y, z), \quad (3.4)$$

where the paraxial approximation $\left| \frac{\partial^2 \phi}{\partial z^2} \right| \ll 2k_0 n_0 \left| \frac{\partial \phi}{\partial z} \right|$ has been used. Algorithms that solve equation (3.4) are known as scalar Beam Propagation Methods (BPM), widely used in this research area [40–44]. Outside the weak guidance approximation, cross-polarization effects become more relevant, and a vectorial description of the problem is necessary.

3.2.1 Implementation via Fourier Transform (FFTBPM)

Equation (3.4) can be written in terms of linear differential operators as [44]:

$$\frac{\partial \phi}{\partial z} = (\hat{A} + \hat{B}) \phi, \quad \text{con } \hat{A} \equiv i \frac{\nabla_{\perp}^2}{2k_0 n_0} \text{ y } \hat{B} \equiv i \frac{k_0}{2n_0} [n^2(\mathbf{r}) - n_0^2]. \quad (3.5)$$

The formal solution to equation (3.5) is $\phi(\mathbf{r}) = \exp[(\hat{A} + \hat{B})(z - z_0)] \phi(x, y, z_0)$. It is convenient to work with the operator $\hat{A}$ in Fourier space and the operator $\hat{B}$ in real space. This is because $\hat{A}$ contains spatial derivatives—in particular, the transverse Laplacian operator $\nabla_{\perp}^2$ —which become simple multiplications upon applying the Fourier transform. Thus, the operation $\hat{A}\phi$ becomes computationally efficient when transformed into the wavevector domain $\mathbf{k}_{\perp}$, where it acts as a diagonal operator. On the other hand, $\hat{B}$ depends on the spatial profile of the refractive index $n(\mathbf{r})$, which is defined locally in real space. Evaluating this term in Fourier space would involve a convolution, which is unnecessarily costly and less intuitive. For this reason, it is kept in real space.

Since $\hat{A}$ and $\hat{B}$ do not commute in general, the exponential operator can be expanded to order $O(\Delta z^3)$ as $\exp[(\hat{A} + \hat{B})\Delta z] \approx \exp\left(\frac{\hat{A}\Delta z}{2}\right) \exp(\hat{B}\Delta z) \exp\left(\frac{\hat{A}\Delta z}{2}\right) + O(\Delta z^3)$.

The algorithm implemented in Appendix Appendix D is as follows:

1. Start with a profile $\phi(x, y, z_0)$
2. Act in Fourier space by transforming the profile and multiplying by the phase associated with $\hat{A}$: $\exp\left(\frac{ik^2\Delta z}{4k_0n_0}\right) \mathcal{F}(\phi(z_0))$, where $k = \sqrt{k_x^2 + k_y^2}$ are the Fourier frequencies.
3. Apply the inverse Fourier transform and multiply by the phase associated with $\hat{B}$:

$$\exp\left[\frac{i\Delta z k_0^2(n^2 - n_0^2)}{2k_0n_0}\right] \mathcal{F}^{-1}\left(\exp\left(\frac{ik^2\Delta z}{4k_0n_0}\right) \mathcal{F}(\phi(z_0))\right)$$
4. Return to Fourier space and multiply by the phase associated with $\hat{A}$:

$$\exp\left(\frac{ik^2\Delta z}{4k_0n_0}\right) \mathcal{F}\left\{\exp\left[\frac{ik_0^2(n^2 - n_0^2)}{2k_0n_0}\Delta z\right] \mathcal{F}^{-1}\left[\exp\left(\frac{ik^2\Delta z}{4k_0n_0}\right) \mathcal{F}(\phi(z_0))\right]\right\}$$
5. Return to real space, having advanced one step Δz :

$$\phi(z_0 + \Delta z) = \mathcal{F}^{-1}\left\{\exp\left(\frac{ik^2\Delta z}{4k_0n_0}\right) \mathcal{F}\left\{\exp\left[\frac{ik_0^2(n^2 - n_0^2)}{2k_0n_0}\Delta z\right] \mathcal{F}^{-1}\left[\exp\left(\frac{ik^2\Delta z}{4k_0n_0}\right) \mathcal{F}(\phi(z_0))\right]\right\}\right\}$$
6. Iterate until the desired propagation distance zz is reached.

Figure 3.2 compares experimental results with numerical simulations obtained via BPM. The normalized intensity profiles show remarkable qualitative agreement, particularly in the spatial distribution of the main lobes.

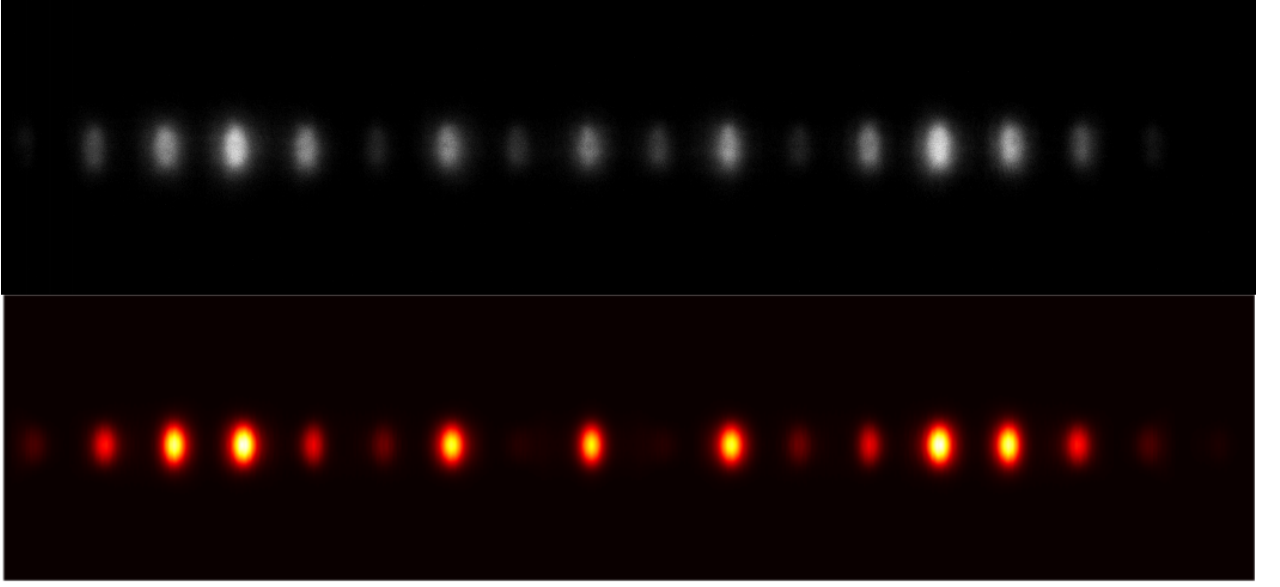


Figure 3.2: Excitation of the central site of a one-dimensional lattice. **Top:** Experimental measurement at $\lambda = 730$ nm. **Bottom:** Numerical simulation performed with BPM.

This level of qualitative agreement validates the weak guidance approximation used in equation (3.1), as well as the paraxial approximation, and reinforces the reliability of the numerical method for designing photonic devices with analogous geometries.

3.3 Comments on Coupled-Mode Theory

The numerical simulation of equations (2.36) represents the most compact formulation possible, since the coupling matrix $\hat{\mathbf{C}} \equiv \hat{\mathbf{P}}^{-1}\hat{\mathbf{H}}$ encodes all the properties of the lattice to be studied in a semi-empirical manner. In this sense, the diagonalization of $\hat{\mathbf{C}}$ constitutes a valuable numerical tool for analyzing the behavior of photonic lattice under variations of parameters such as dimerization (defined as the ratio between two coupling constants) or detuning (the difference between the propagation constants of distinct modes).

Furthermore, this approach allows for the exploration of even "non-physical" systems, thanks to the degrees of freedom available in the elements of $\hat{\mathbf{C}}$: for example, cases where second-neighbor coupling is greater than first-neighbor coupling, or systems with complex couplings.

In the weak guidance approximation, the longitudinal components of the electric field can be neglected:

$$\nabla \cdot (n^2 \mathbf{E}) \stackrel{\nabla n^2 \sim 0}{\sim} n^2 \nabla \cdot \mathbf{E} = 0 ,$$

where the order of magnitude of the longitudinal field component is $|E_z| \sim |\nabla_{\perp} \cdot \mathbf{E}_{\perp}|/\beta$. Thus,

the studied modes are quasi-transverse, and the matrix $\hat{P}$ reduces to:

$$P_{ij} \sim \frac{k_z^i + k_z^j}{4\omega\mu_0} \iint (\mathbf{e}_i^\perp)^* \cdot \mathbf{e}_j^\perp dx dy . \quad (3.6)$$

Equation (3.6), which quantifies the overlap between modes, along with equation (2.33) describing the matrix elements of the Hamiltonian operator, constitute fundamental tools for the comparative analysis between the Eigenmode Expansion (EME) method and Coupled-Mode Theory (CMT). This comparison is performed through a systematic study of the eigenvalue spectrum of the coupling matrix $\hat{C}$, which contains essential information about the effective propagation constants of the system.

Figure 3.3 presents a quantitative analysis of this comparison, showing the evolution of the eigenvalues for a dielectric photonic coupler as a function of the separation distance between waveguides. It is observed that both methods converge asymptotically for distances greater than $d > 20\mu\text{m}$, where the weak field approximation of CMT holds. However, in the strong coupling regime ($d < 13\mu\text{m}$), discrepancies begin to become noticeable.

Beyond the spectral analysis, the validity of the computed eigenstates can be indirectly verified through equation (3.3), which relates the field evolution to the projection onto the system's eigenmodes, and by qualitatively comparing the dynamic profiles obtained with the experimental and numerical results shown in Figure 3.2. This analysis (see Figure 3.4) allows establishing the applicability limits of each numerical method: while EME provides accurate results across the entire parameter range at the cost of higher computational complexity, CMT offers an efficient alternative for weakly coupled systems where the approximation of localized modes remains valid: separation distances $d \gtrsim 15\mu\text{m}$.

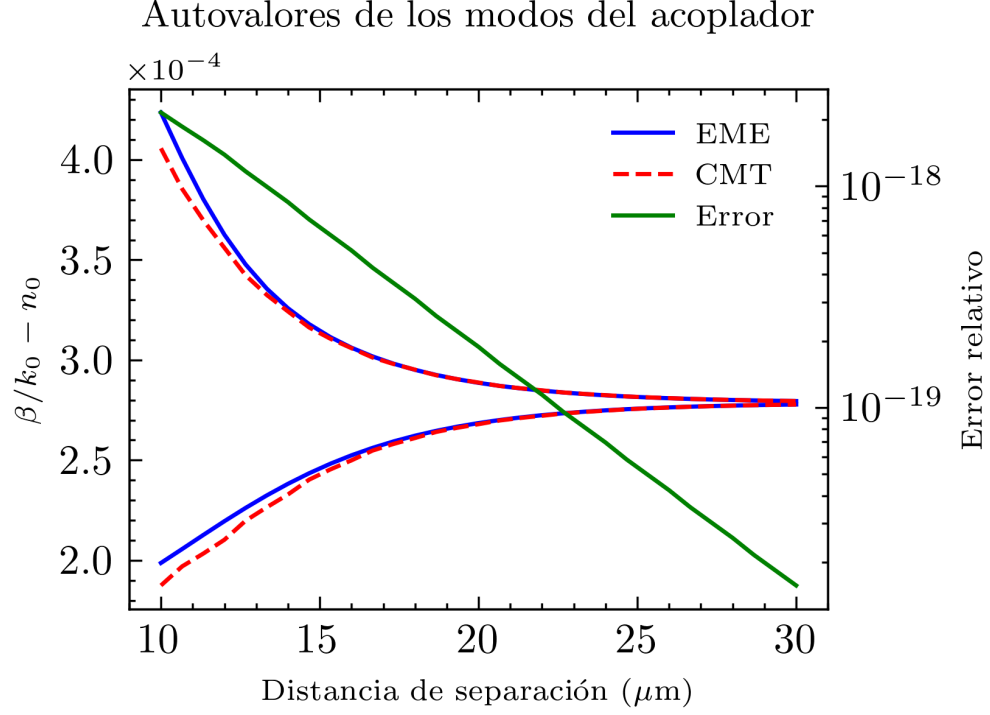


Figure 3.3: Comparison of the eigenvalues obtained with the Eigenmode Expansion (EME) method and with Coupled-Mode Theory (CMT). Greater divergence is observed when the distance between waveguides is small. Parameters used: $n_0 = 1.48$, $\Delta n = 4 \times 10^{-4}$, $\lambda = 730 \text{ nm}$ y $a = 3 \mu\text{m}$.

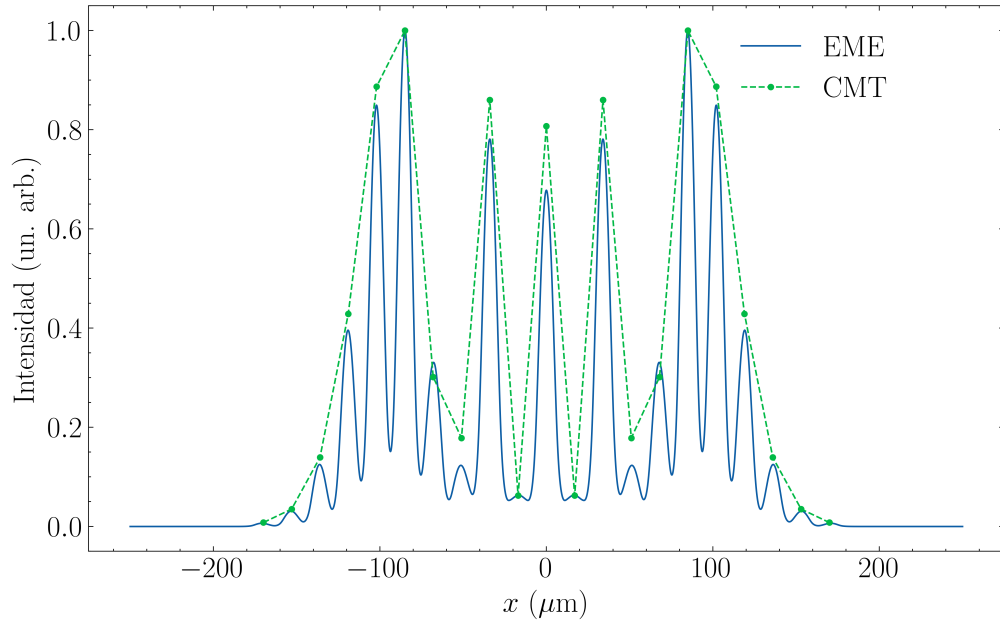


Figure 3.4: Dynamic profile of a one-dimensional array of 21 waveguides at a distance $d = 17 \mu\text{m}$ simulated with CMT and with EME. The results are similar to those in Figure 3.2.

4. Experimental Methods

This chapter details the experimental procedures developed for the fabrication and characterization of photonic lattices based on waveguides. The methodology encompasses three fundamental aspects: (1) direct writing of waveguides using a femtosecond laser, (2) optical excitation systems with a supercontinuum laser, and (3) advanced techniques for spatial light modulation to control initial conditions.

4.1 Direct Writing of Waveguides

The fabrication of waveguides was carried out using the direct writing technique with a femtosecond laser: ultrashort pulses emitted from a Yb-doped fiber laser ATSEVA ANTAUS at 1030 nm, with a repetition rate of 500 kHz, are strongly focused into a borosilicate sample, producing slight and permanent changes in the local refractive index $\Delta n \sim 10^{-4} - 10^{-3}$. This method, available and implemented by previous members of the Photonic Lattices Group, allows for the creation of three-dimensional structures through computer-controlled movements of the Aerotech Nanopositioner XYZ platform [45].

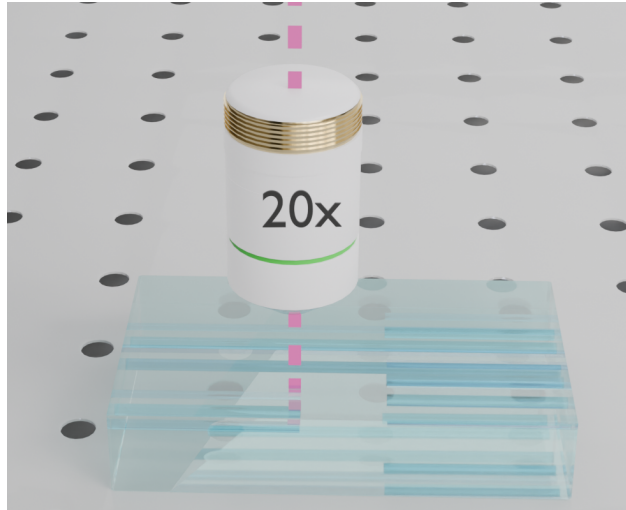


Figure 4.1: Schematic of the waveguide writing technique. The laser beam is focused using a microscope objective (20x) while the sample is moved along three axes via a computer-controlled platform.

The writing parameters that work for exciting modes in the visible spectrum are:

- Pulse width: 215 fs.
- Repetition rate: 500 kHz.
- Writing speed: 0.1 - 20.0 mm/s.

- Measured arrival power: 70.0 - 150.0 mW.

4.2 Supercontinuum Laser Excitation Setup

For optical characterization, an excitation system based on a broadband supercontinuum (SC) laser (470 nm - 2200 nm) was implemented. Specifically, the model is a YSL SC-5. The configuration allows selecting specific wavelengths through an acousto-optic modulator AOTF-PRO (430 nm - 1450 nm), with a spectral resolution of ± 5 nm and an output power of 1 mW per wavelength.

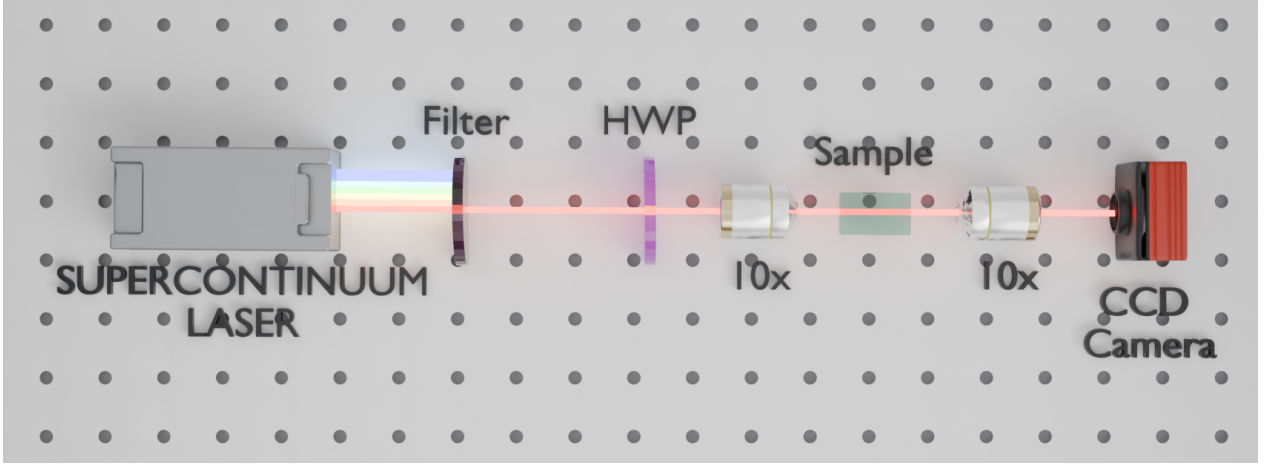


Figure 4.2: Supercontinuum laser excitation setup. Filter: Acousto-optic modulator and iris. HWP: Half-wave plate.

To use initial conditions different from a Gaussian, it is necessary to incorporate methods of spatial light modulation. In this thesis, a technique known as phase encoding via hologram was implemented [46].

4.2.1 Premodulation Stage

The spatial light modulator used is a HOLOEYE PLUTO-VIS SLM - Reflective LCOS (resolution 1920×080 px, pixel size 8 μm), whose optical response occurs with polarization parallel to the optical table plane. A half-wave retarder ($\lambda/2$) followed by a Glan-Thompson polarizer 100,000:1 is used to ensure that the laser light polarization matches that of the SLM's response. Subsequently, the beam is magnified and collimated to cover the entire available pixel area using a 20x objective and a 100mm focal length lens (telescope).

4.2.2 Modulation Stage

A diffraction grating that maximizes the power of the first diffraction order is used. To modulate amplitude, the grating must be multiplied by the desired amplitude mask, while for phase modulation it suffices to add the grayscale level corresponding to the desired phase. Figure 4.3 outlines the algorithm implemented in Python in Appendix Appendix E.

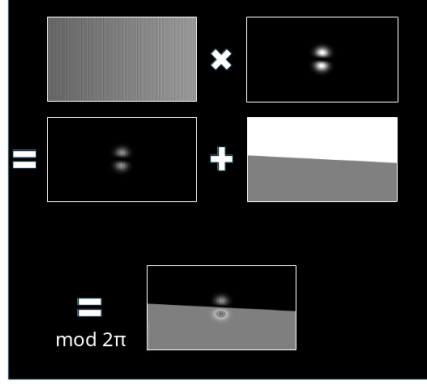


Figure 4.3: Spatial light modulation algorithm for arbitrary amplitude and phase masks. The diffraction grating parameters are subject to the wavelength used (730 nm).

4.2.3 Coupling Stage

The modulated image passes through a pair of lenses, L_2 with a 1000 mm focal length and L_3 with a 50 mm focal length, to reduce its size to the order of micrometers. The tilt of the sample's input face must coincide with the plane of the modulated image. To achieve this, two pairs of Gaussian beams are generated—one vertical and one horizontal—so that when translating the 4x objective lens, the interference maxima are produced at the midpoint between the centers of the Gaussian beams.

4.2.4 Camera Capture Stage

Once the sample tilt is calibrated, its position is fixed in the experimental setup. The output image is magnified using a 10x objective and captured using a beam profiler (Beam Profiler BC106N-VIS, Thorlabs) with a spatial resolution of $6.45 \mu\text{m}/\text{px}$ [47].

Optional Interferometric Configuration

The setup can be modified to incorporate a Mach-Zehnder interferometer by:

- A *beam splitter* between lens L_1 and the SLM, using the pre-modulation beam as a reference.
- A second *beam splitter* before the camera to recombine the beams.
- A neutral density (ND) filter to balance the intensities ($I_{\text{ref}} \approx I_{\text{muestra}}$).

For the generation of dipole modes, it is essential to adjust the phase difference between the recombined beams to a value close to π . This is experimentally evidenced by the appearance of an intensity minimum at the center of the interference pattern, corresponding to destructive interference in that region.

4.2.5 Optical Circuit

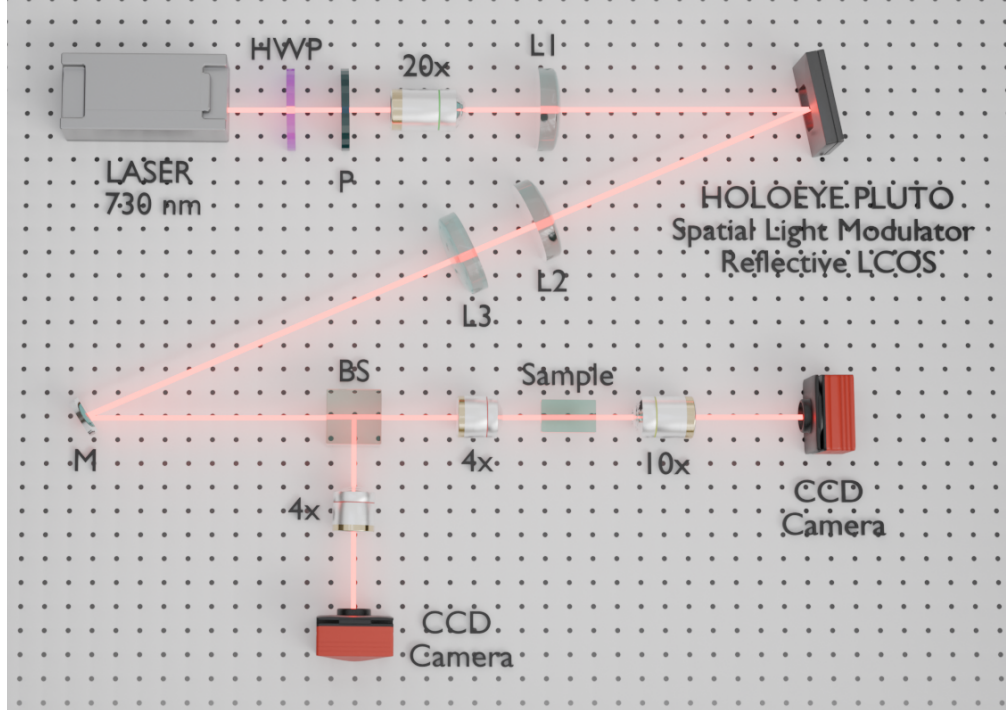


Figure 4.4: Complete diagram of the experimental system for spatial light modulation, showing the optical components and their relative arrangements.

4.2.6 Generation of Complex Images

The capability for precise control over amplitude and phase is verified through the generation of optical vortices, quantified by their Orbital Angular Momentum (OAM). Interferometric analysis allows:

- Determining the topological charge by counting the spiral branches in the interference pattern.
- Establishing the sign of through the direction of rotation of the phase front.

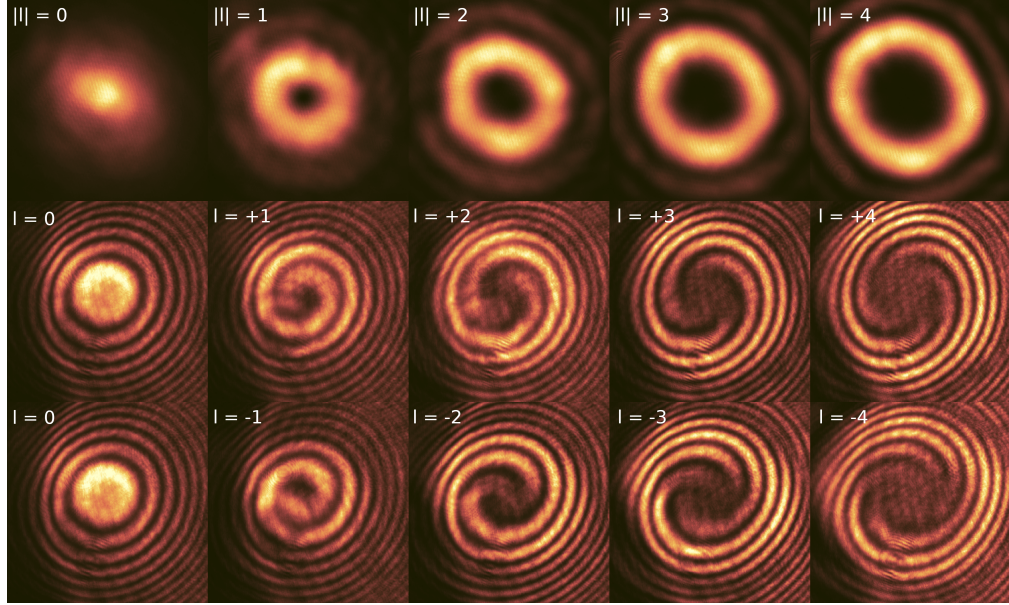


Figure 4.5: Characterization of optical vortices via Mach-Zehnder interferometry. **Top:** Intensity for different OAM charges (ℓ). **Middle and Bottom:** Corresponding interference patterns, where the number of spiral branches indicates $|\ell|$ and the direction of rotation accounts for the sign of ℓ .

4.3 Image Analysis

From the captured images, it is possible to extract information about the power contained at each site of the discrete photonic system under study. To achieve this, the entire image must be divided into equally spaced rectangles that enclose the regions where waveguides are present, whether illuminated or not. The power at each site will then be the sum of the intensity of every pixel within its respective rectangle.

Image processing includes:

- Background correction
- Normalization by maximum intensity.
- Automatic segmentation via thresholding.

The obtained data allow for the reconstruction of the power distribution within the photonic lattice and the analysis of coupling phenomena between neighboring waveguides.

5. Coupling of p_y Modes and the Invisibility Angle

In electrostatics, dipolar interactions can be described using second-order Legendre polynomials, particularly with $P_2(\cos(\theta)) = 3\cos^2(\theta) - 1$, where θ represents the angle between two electric dipoles. The angular value $\theta_m \approx 0.62$ radians is known as the *magic angle*, as it cancels the dominant dipolar interaction term [48].

This chapter focuses on the experimental study of vertical dipolar modes, also referred to as p_y modes, whose existence requires surpassing the cutoff condition: a sufficiently short wavelength, combined with an index contrast Δn and an appropriate transverse dimension. These modes exhibit a transverse distribution characterized by two symmetric lobes relative to the horizontal axis and a phase difference of π between them.

5.1 Couplers

When studying the evanescent coupling between p_y modes in elliptical waveguides, two limiting configurations are distinguished: when the waveguides are arranged horizontally (aligned along the x -axis), the coupling—denoted κ_π —is positive; conversely, for vertical couplers (aligned along y), the coupling κ_σ is negative [30]. This sign change is interpreted as an interference effect between the lobes of the p_y mode, whose lobular profile with odd symmetry about the horizontal axis generates different coupling conditions depending on the relative orientation of the waveguides.

This behavior presents an analogy¹ with the σ and π chemical bonds formed in carbon chains: in quantum chemistry, σ bonds correspond to frontal (axial) overlaps of orbitals, while π bonds arise from lateral overlaps, typically between p orbitals with nodes along the bonding axis. Analogously, we refer here to *coupling* κ_σ as that which occurs through axial superposition between modes with suitable symmetry, generating a profile without a transverse node; whereas *coupling* κ_π or $\kappa_{\theta=0}$ corresponds to a lateral superposition, in which the modal distribution exhibits a central node.

To verify this effect, 20 dimers were experimentally fabricated with a fixed separation of 25 μm and a propagation length of 15 mm, varying the angle between waveguides from 0.00

¹This analogy is purely geometric and modal. It does not imply the existence of electron clouds, interatomic potentials, or bonding energy in the chemical sense. However, it is retained as a useful conceptual tool to describe the relative orientation of the modes and the effect of symmetry on the strength and sign of the coupling. Its utility lies in the clarity with which it communicates differences in the nature of coupling, especially in multi-orbital systems like those studied in this thesis.

rad to 1.57 rad. The initial excitation was generated using a spatial light modulator (SLM), programmed to selectively couple the p_y mode into one of the waveguides.

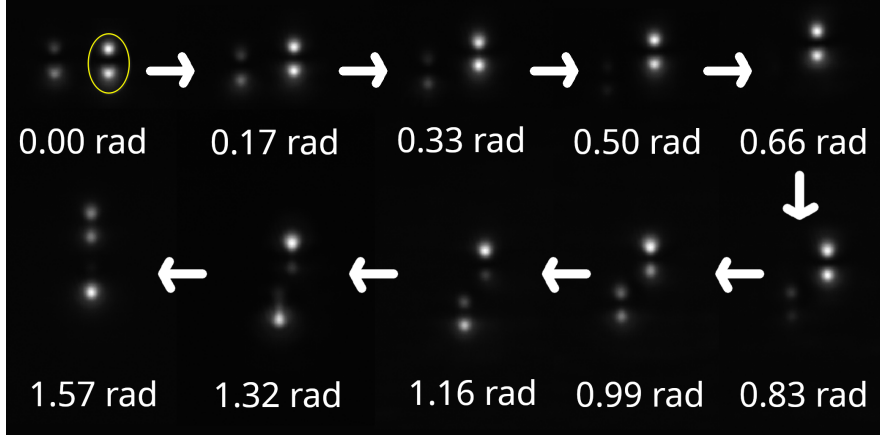


Figure 5.1: Experimental angular sweep for a propagation distance of 15 mm. The effect of the magic angle is observed between 0.50 and 0.66 rad.

The obtained images were analyzed following the procedure described in Section 4.3. Subsequently, using equation (2.40), which describes the dynamic coupling, the effective coupling was quantitatively characterized as a function of the angle θ , measured from the horizontal. To correctly reflect the continuity of the coupling with the angle, the sign of the coupling was adjusted in the theoretical fit, as shown in Figure 5.2.

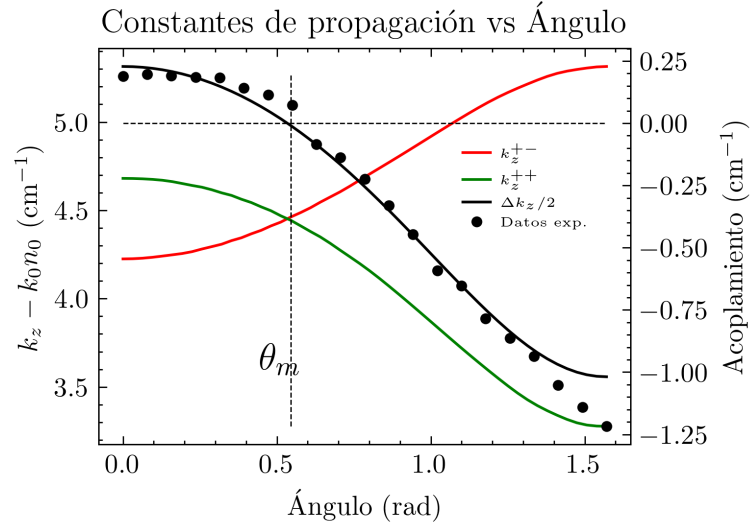


Figure 5.2: Propagation constants and couplings as a function of the angle for p_y modes, numerically calculated using EME. The results are compared with experimental data extracted from Figure 5.1.

5.2 Honeycomb Lattices

The honeycomb lattice, known for being the underlying crystalline structure of graphene, presents properties relevant to this thesis, particularly in its Bloch bands: both are dispersive and exhibit a Dirac point [49]. Once the fabrication parameters from the previous section were determined, the same effect was studied in a honeycomb lattice by keeping the distance between sites constant while varying the angle (Figure 5.3).

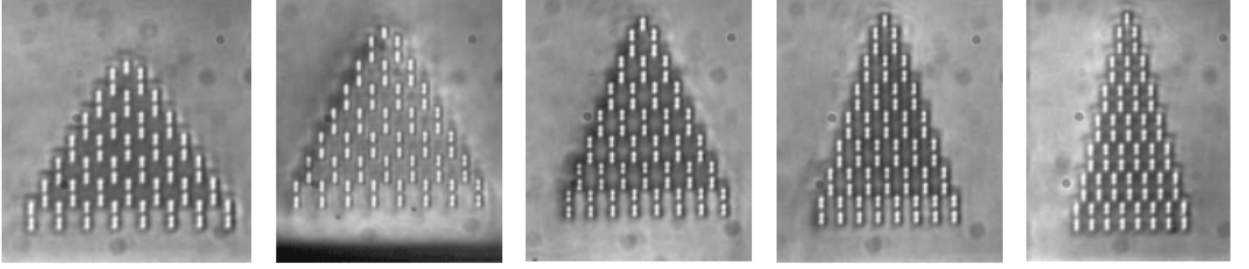


Figure 5.3: Microscope images of honeycomb-type photonic lattices for p_y modes under white light illumination.

A first-neighbors model would only consider the vertical coupling κ_σ and the angular coupling κ_θ . However, an accurate description of the experimental data requires including couplings up to third neighbors, as well as non-orthogonality corrections. Figure 5.4 shows a schematic of the complete model. The system's Hamiltonian is expressed as:

$$\hat{H}_\Sigma = \hat{H}_{NN} + \hat{H}_{NNN} + \hat{H}_{NNNN}, \quad (5.1)$$

where $\hat{H}_{NN}$, $\hat{H}_{NNN}$ and $\hat{H}_{NNNN}$ contain the couplings to first neighbors (κ_σ y κ_θ), second neighbors (t_π and $t_{\theta 2}$), and third neighbors ($t_{\theta 1}$ y $t_{\theta 3}$), respectively (see Figure 5.4).

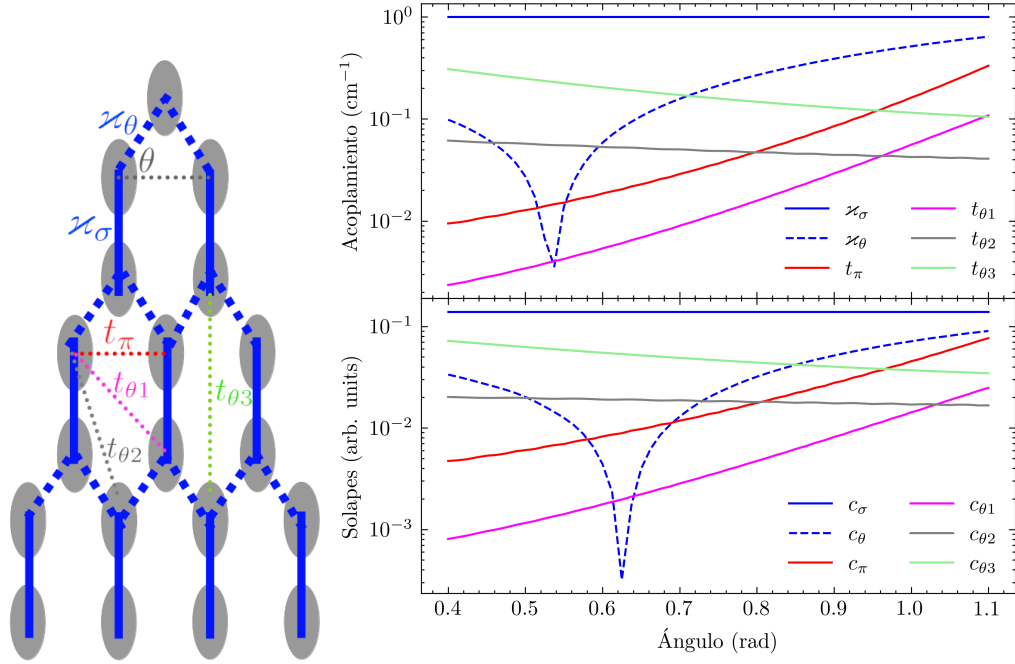


Figure 5.4: **Left:** Schematic of the honeycomb model for p_y modes with couplings up to third neighbors. **Right:** (Top) Absolute values of the couplings as a function of the angle θ . (Bottom) Normalized overlap integrals as a function of the angle θ .

Furthermore, the non-orthogonal matrix $\hat{c}$ is defined from the matrix $\hat{P}$ [equation (3.6)] as $c_{ij} = P_{ij}/I$, where $I = P_{ii}$ is the intensity of the p_y mode, so that the diagonal elements of $\hat{c}$ are equal to 1. Similarly to the couplings, Figure 5.4 plots the magnitude of the overlaps c_{ij} as a function of the angle. The non-Hermitian Hamiltonian $\hat{H}'_\Sigma \equiv \hat{c}^{-1} \hat{H}_\Sigma$ describes the dynamics of the lattice and incorporates both non-orthogonal effects and long-range couplings. Figure 5.5 shows the spectrum as a function of the angle θ . Two main regions are distinguished: one for angles $0.4 < \theta < 0.7$, where the eigenvalues cluster into three quasi-flat bands, and another for angles $0.7 < \theta < 1.1$, where the gap decreases in magnitude, thus increasing transport in the lattice. The inverse participation ratio (IPR) of each eigenstate is calculated as $\text{IPR} = \sum_i I_i^2 / (\sum_i I_i)^2$. This allows for an adequate description of the experimental data shown in the right panel of Figure 5.5.

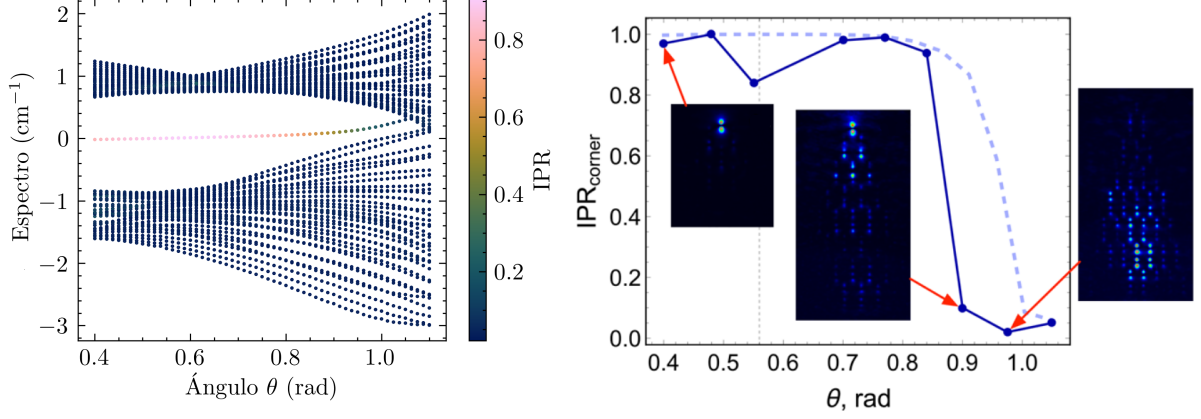


Figure 5.5: **Left:** Spectrum of the matrix $\hat{H}_\Sigma$ as a function of the angle. Each point is colored according to its inverse participation ratio (IPR). **Right:** Inverse participation ratio for the corner site excitation as a function of the angle θ .

The strong localization observed when exciting the corner site is explained by the fact that the projection of the initial condition onto the eigenstates corresponds predominantly to the eigenstate with a null eigenvalue. The existence of this eigenstate is due to the topology exhibited by the Hamiltonian $\hat{H}_\Sigma$ in reciprocal or Bloch space. Although it is possible to calculate the bulk polarization using Wilson loops and determine that its value is discretized as $\mathbf{P} = (0.5, 0.5)$, it is more illustrative to note that the lattice can be decomposed into quasi-SSH chains (see Figure 5.6). In both schemes, quantization is a consequence of the inversion symmetry present in the lattice.

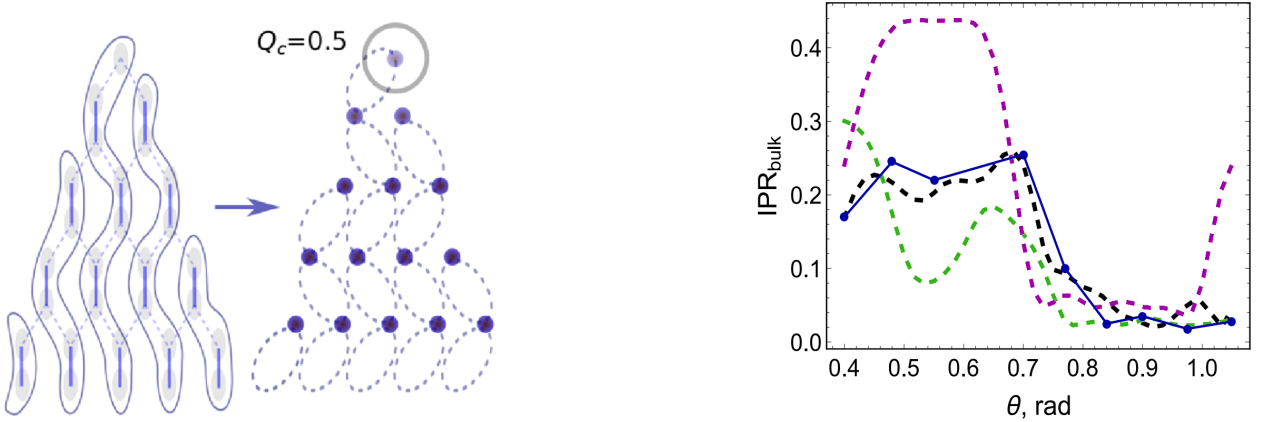


Figure 5.6: **Left:** Decomposition of the lattice in the flat-band limit into isolated dimer SSH chains. **Right:** IPR for the experimental excitation of the central site of the lattice (points connected with lines to guide the eye) and numerically simulated for three cases: without long-range couplings and non-orthogonal corrections (dashed purple curve), with long-range couplings but without non-orthogonal corrections (dashed green curve), and with long-range couplings and non-orthogonal corrections (dashed black curve).

The dynamics associated with flat bands were studied experimentally through the lo-

calized excitation of a single site within the bulk of the lattice, with the aim of extracting the value of the *Inverse Participation Ratio* (IPR). Because a point-like excitation has components in all Bloch bands, this type of initial preparation amplifies the differences in the dispersion of each band. In this context, propagation with very little diffraction indicates that all involved bands are nearly flat. This approach allows for the direct observation of the bulk properties of the lattice, as a central excitation avoids edge effects and favors the manifestation of the global modal structure. In the ideal limit, a system composed solely of perfectly flat bands would not allow transverse transport, restricting dynamic evolution to local oscillations between effective dimers.

The analyzed data reveal two distinct regimes: for lattices with $0.4 < \theta < 0.8$ (close to the invisibility angle), a good confinement effect (*caging*) is observed. However, larger angles ($\theta > 0.8$) favor significant field diffraction, resulting in delocalization at the output. These experimental results (points in Figure 5.6) agree with theoretical calculations (dashed line). Contrary to expectations, long-range couplings and non-orthogonality corrections do not degrade the flat band dynamics near the invisibility angle; rather, they complement each other. The maximum IPR values (0.20-0.25) for the dimer state after three Aharonov-Bohm caging cycles [50] indicate localization comparable to one-dimensional optical proposals with all their bands flat (ABF).

In conclusion, this experimental study demonstrates that the *invisibility angle*—defined as the angular condition for the suppression of dipolar coupling between $\mathbf{P}$ modes—constitutes an effective tool for controlling transport in discrete photonic lattices. By exploiting the transverse symmetry of the modes as an active resource, optical confinement is achieved without the need for disorder, nonlinearity, or external fields. These results strengthen the conceptual framework of multi-orbital lattices as versatile platforms for studying flat band dynamics and controlled confinement through geometry and modal symmetry.

6. Non-Symmetric Evanescent Coupling

Discrete models in photonics, such as coupled-mode theory (CMT), often assume symmetric couplings between waveguides, meaning that the coupling constant between two sites $C_{i \rightarrow j}$ is equal to $C_{j \rightarrow i}$. This assumption ensures the Hermiticity of the effective Hamiltonian and is typically justified when the waveguides are identical and sufficiently separated. However, this symmetry can be inherently broken in real systems, even in the absence of loss or gain, when the waveguides exhibit different refractive index profiles, which is experimentally achieved by varying the writing power of the waveguides [51].

6.1 Origin of Non-Symmetric Dynamics

Evanescent coupling between waveguides occurs due to the overlap of the modal tails outside the confinement core. When two waveguides have different index contrasts ($\Delta n_1 \neq \Delta n_2$), the guided modes exhibit evanescent tails with varying amplitude and extent, which induces a directionally unequal coupling: $C_{1 \rightarrow 2} \neq C_{2 \rightarrow 1}$.

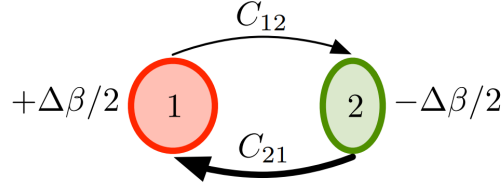


Figure 6.1: Schematic of non-symmetric coupling.

This *non-symmetric* behavior can be quantified using the generalized non-orthogonal coupled-mode theory developed in Section 2.5, which includes the effect of modal overlap through the matrix $\hat{P}$, encoding power normalization.

Considering a dimer composed of two non-identical waveguides, the dynamic equations for the modal amplitudes are written (see equation (2.36)) as:

$$-i \frac{d}{dz} \begin{pmatrix} P_{11} & P_{12} \\ P_{12} & P_{22} \end{pmatrix} \begin{pmatrix} u_1 \\ u_2 \end{pmatrix} = \begin{pmatrix} H_{11} & H_{12} \\ H_{12} & H_{22} \end{pmatrix} \begin{pmatrix} u_1 \\ u_2 \end{pmatrix} \iff -i \frac{d}{dz} \mathbf{v} = \hat{H}' \mathbf{v} , \quad (6.1)$$

where $\mathbf{v} = \hat{P}^{1/2} \mathbf{u}$ represents an orthogonalized basis, and $\hat{H}' = \hat{P}^{-1/2} \hat{H} \hat{P}^{-1/2}$ is the effective Hamiltonian in that basis. Since $\hat{H}$ and $\hat{P}$ are symmetric, $\hat{H}'$ is also symmetric, which guarantees real eigenvalues. By proposing stationary solutions of the form $\mathbf{v}(z) \sim e^{i\lambda z}$, the generalized eigenvalue problem $\det(\hat{H} - \lambda \hat{P}) = 0$ is obtained. It is important to emphasize that this orthogonalized basis $\mathbf{v}$ is not experimentally accessible: in a real setup, only modes

localized in individual waveguides can be observed, which corresponds to the physical basis $\mathbf{u}$. Therefore, the experimental analysis of the dynamics must be performed in this basis, where the evolution is governed by the effective coupling matrix:

$$\hat{C} = \hat{P}^{-1} \hat{H} = \frac{1}{P_{11}P_{22} - P_{12}^2} \begin{pmatrix} P_{22}H_{11} - P_{12}H_{12} & P_{22}H_{12} - P_{12}H_{22} \\ P_{11}H_{12} - P_{12}H_{11} & P_{11}H_{22} - P_{12}H_{12} \end{pmatrix}.$$

This system exhibits non-reciprocal dynamics: the energy transfer efficiency depends on the input channel. This asymmetry can be quantified experimentally through the *intensity imbalance*, defined for each excitation $i = L, R$ as:

$$I^i(z) \equiv \frac{P_1^i(z) - P_2^i(z)}{P_1^i(z) + P_2^i(z)},$$

and its absolute average as:

$$\bar{I}(z) \equiv \frac{|I^L(z) + I^R(z)|}{2}.$$

The quantity $\bar{I}(z)$ is particularly useful for detecting global asymmetries in the dynamics: any deviation from zero implies a non-symmetric evolution, revealing the presence of non-reciprocal evanescent couplings.

6.2 Numerical Validation

Using the Eigenmode Expansion (EME) method (Section 3.1), the dynamics of asymmetric dimers were simulated by injecting the same Gaussian initial condition in all cases. Figure 6.2 shows the absolute average of intensity imbalances $\bar{I}(z)$ as a function of distance for $n_2 - n_1 = 1.75 \times 10^{-5}$ (weak asymmetry) and for $n_2 - n_1 = 5.00 \times 10^{-5}$ (strong asymmetry).

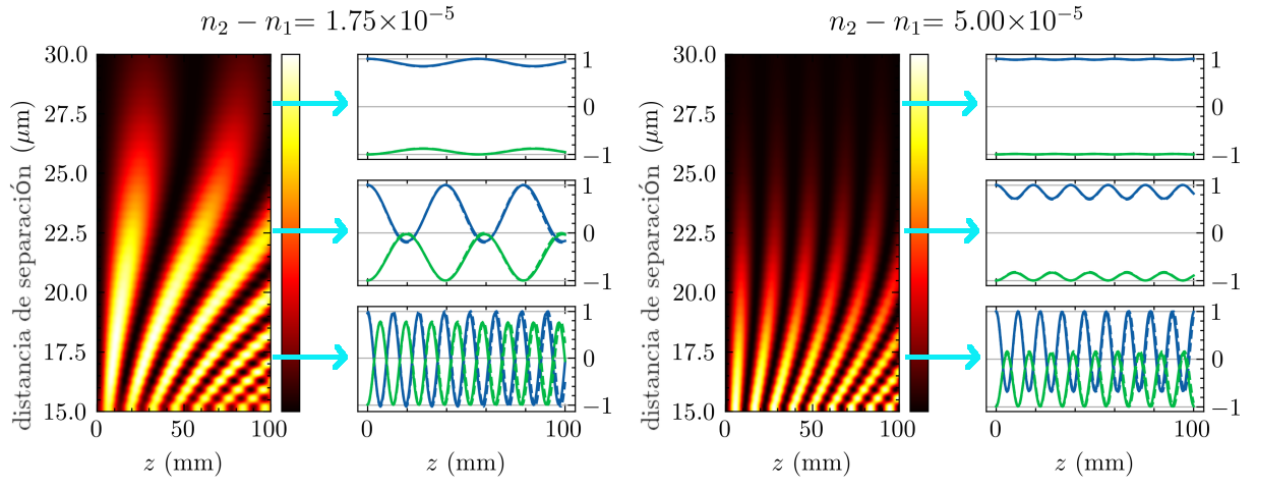


Figure 6.2: Absolute average of intensity imbalances $\bar{I}(z)$ as a function of propagation distance z and the separation distance between waveguides, comparing two regimes: (1) weak asymmetry ($\Delta n = 1.75 \times 10^{-5}$) and (2) strong asymmetry ($\Delta n = 5.00 \times 10^{-5}$). The values I^L (green) and I^R (blue) corresponding to three specific study cases are included.

6.3 Experimental Verification

To verify this effect, dimers were fabricated using the femtosecond laser writing technique described in Section 4.1, varying the input channel i , the writing power P_g^i , the distance between waveguides d , and the effective propagation length z . In particular, the case $\Delta P = P_g^1 - P_g^2 = 5 \text{ mW}$ was explored, with a separation $d = 18 \mu\text{m}$. Figure 6.3 shows that excitation of the upper waveguide favors energy transfer to the lower waveguide, while the inverse excitation achieves a 1:1 energy distribution at $z \sim 11 \text{ mm}$.

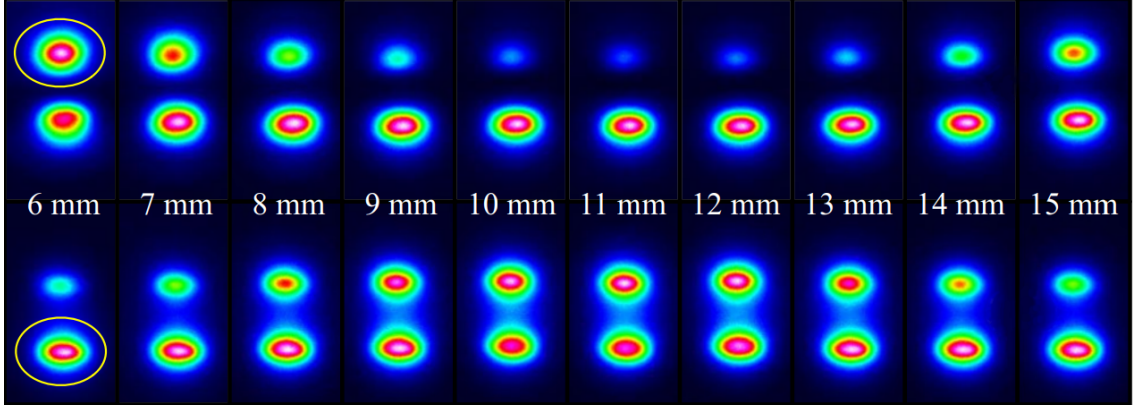


Figure 6.3: Output profiles for different propagation lengths z_i , exciting the upper waveguide (left) and lower waveguide (right), with $d = 18 \mu\text{m}$.

Using slab-type waveguides and TE modes (see Section 2.2), analytical expressions for the couplings are obtained:

$$\frac{C_{21}}{C_{12}} \approx \left(\frac{\Delta n_2}{\Delta n_1} \right)^2 e^{(\gamma_2 - \gamma_1)d} \approx \frac{P_2^1(z)}{P_1^2(z)},$$

where γ_i represents the evanescent decay coefficient of mode i . his expression shows that the asymmetry increases with the separation between waveguides, with the difference between the modal decay rates $\gamma_2 - \gamma_1$ and with the square of the ratio of index contrasts $\Delta n_2 / \Delta n_1$.

6.4 Implications and Applications

This study demonstrates that non-symmetric coupling is a physical phenomenon that, in the absence of energy loss or gain, can be passively induced. Its implications include: *breakdown of reciprocity*, without requiring magneto-optical materials or temporal modulation; *modal asymmetry*, since the inequality between C_{ij} and C_{ji} affects the formation of symmetric/antisymmetric states and interference; *directional optical devices*, such as asymmetric beam splitters or optical isolators; and its *extension to lattices* with directed couplings. Together, these results allow for an extension of coupled-mode theory and open new opportunities in the design of optical lattices with directional functionality.

7. Photonic Molecules

The technique of writing waveguides using ultrashort laser pulses, described in Chapter 4.1, allows for the three-dimensional fabrication of photonic structures with micrometric precision. However, this technique has inherent limitations due to the elliptical shape of the laser focus, which imposes restrictions on the transverse modes that can be efficiently excited and, in particular, on the possible intermodal couplings between modes of different symmetry, such as S and P [41].

To overcome these restrictions and expand the degrees of freedom in the design of photonic lattices, an approach inspired by molecular physics is adopted here: by positioning two waveguides sufficiently close, their modes can couple coherently, generating new extended collective modes. This process is analogous to molecular formation in quantum physics, where two atomic orbitals combine linearly to form bonding and antibonding molecular orbitals (see Figure 7.1).

In this work, we will call a *photonic molecule* a system of two coupled waveguides, whose eigenfunctions combine to generate symmetric and antisymmetric hybrid modes, in analogy with molecular orbitals. This analogy is based on the spatial shape of the modes and their controlled overlap, but does not imply the existence of bonding forces, shared electrons, or interatomic potentials. The relationship with quantum molecules is, therefore, formal and geometric, and is restricted to the structural parallelism between optical modes and orbitals [29].

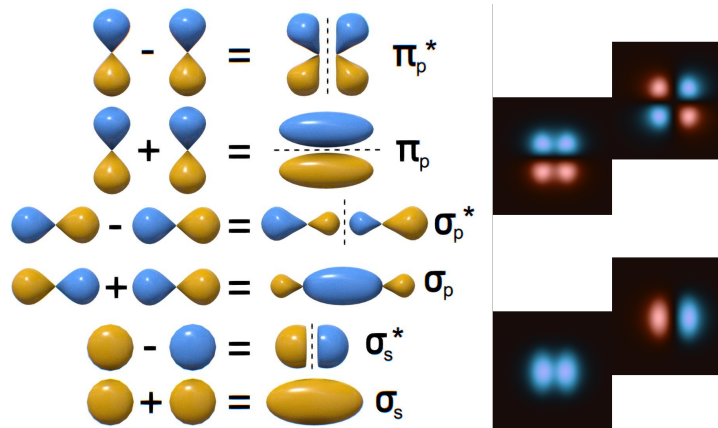


Figure 7.1: Analogy and differences between quantum molecules (left) and photonic molecules (right). Both atomic orbitals and individual waveguide modes can hybridize, generating new collective states. In the photonic case, hybridization occurs between guided optical modes. Here, there is no photonic analogue of the σ_p molecular orbitals.

Building on this idea, this chapter experimentally analyzes a photonic lattice constructed from such molecules as basic building blocks. In particular, a periodic SSH-type lattice [52] is studied—a multi-orbital extension of the Su-Schrieffer-Heeger model—which allows exploring the impact of interorbital SP coupling on band topology. The system exhibits two independent topological transitions, associated with the modulation of geometric dimerization and the detuning between modes of different symmetry. These transitions are characterized through the observation of edge modes, the calculation of bulk polarization, and spectral analysis, enabling access to a rich photonic phenomenology based on modal engineering.

7.1 Eigenstates of the Photonic Coupler for Small Separation Distances

As mentioned in Section 3.3, coupled-mode theory (CMT) adequately describes the photonic systems under study when the distance between waveguides exceeds $13\,\mu\text{m}$. or smaller separations, the system must be treated as a single macro-waveguide. The eigenmode expansion (EME), presented in Section 3.1, provides a numerical tool valid for both regimes. Through simulations of waveguide pairs at different distances, the behavior of their eigenstates was characterized. Figure 7.2 shows that the antisymmetric eigenstate $(+-)$ only exists for distances greater than $13\,\mu\text{m}$, as below this threshold it becomes a radiation mode ($k_z^{+-} < k_0 n_0$). In contrast, the symmetric eigenstate $(++)$ exists and can be described as a single entity, which in this thesis will be referred to as the *S mode* of the photonic molecule.

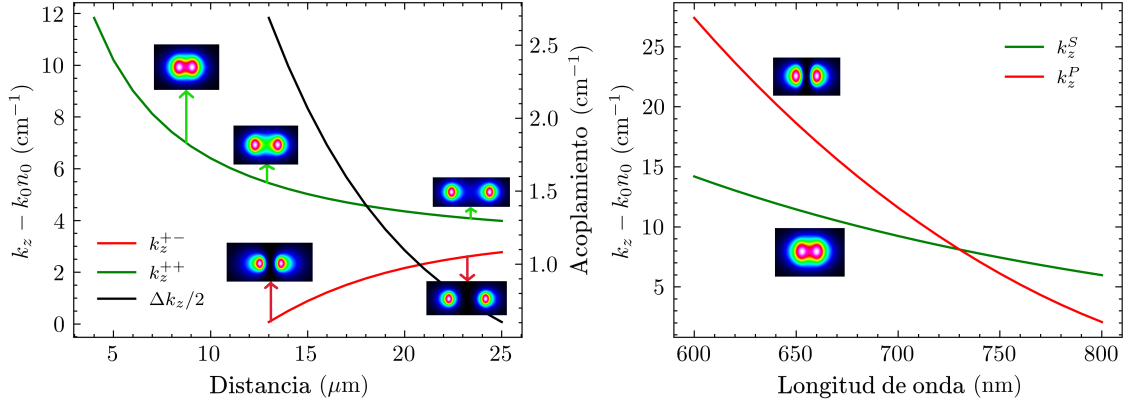


Figure 7.2: **Left:** Propagation constants and couplings as a function of distance for fundamental modes, calculated using EME. **Right:** Propagation constants of *S* and *P* modes as a function of wavelength.

Although the propagation constants of the *S* and *P* modes in the same molecule exhibit different values, they can be equalized between adjacent molecules by adjusting the refractive index contrast in the waveguides [41, 52]. For example, Figure 7.2 shows that at 730 nm the propagation constants are equalized for $\Delta n_S = 5.200 \times 10^{-4}$ and $\Delta n_P = 10.423 \times 10^{-4}$.

7.2 Photonic Molecules in the SP-SSH Lattice

For the experimental implementation (Section 4.1) of a lattice exhibiting SP coupling [24, 41, 52], the horizontal P modes from the previous section, obtained through photonic molecules, were used. Precise tuning of the propagation constants of the S (k_z^S) and P (k_z^P) modes allowed considering a degree of freedom analogous to electron spin (*pseudospin*). The Hamiltonian H of this lattice [52], illustrated in Figure 7.3, is as follows:

$$\begin{aligned}
 H = \sum_n & \left[\frac{\delta\beta}{2} (p_{n,1}^* p_{n,1} - s_{n,1}^* s_{n,1} + p_{n,2}^* p_{n,2} - s_{n,2}^* s_{n,2}) + \kappa_{ss,2} s_{n,2}^* s_{n,1} - \kappa_{pp,2} p_{n,2}^* p_{n,1} \right. \\
 & + \kappa_{ss,1} (s_{n-1,2}^* s_{n,1} + s_{n+1,2}^* s_{n,2}) - \kappa_{pp,1} (p_{n-1,2}^* p_{n,1} + p_{n+1,2}^* p_{n,2}) + \kappa_{sp,2} (s_{n,2}^* p_{n,1} - p_{n,2}^* s_{n,1}) \\
 & \left. + \kappa_{sp,1} (s_{n-1,2}^* p_{n,1} - p_{n-1,2}^* s_{n,1} + s_{n+1,1}^* p_{n,2} - p_{n+1,1}^* s_{n,2}) \right] + \text{c.c.}
 \end{aligned}$$

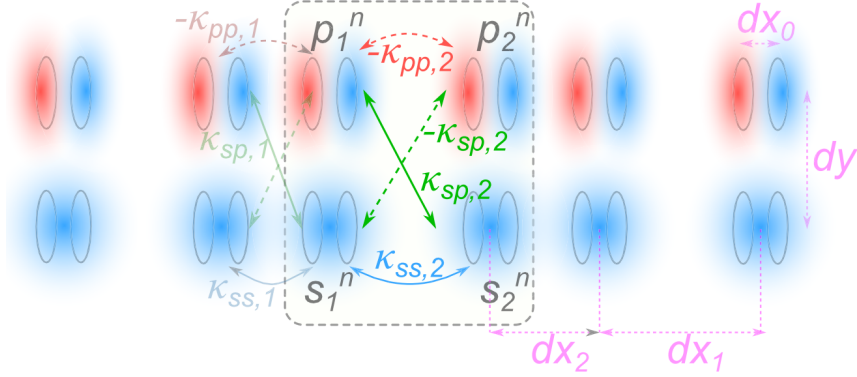


Figure 7.3: Schematic of the SP-SSH lattice and the considered couplings.

If the basis $\mathbf{v}^n = (s_1^n, p_1^n, s_2^n, p_2^n)^T$ is chosen, the Bloch Hamiltonian can be written in block form as:

$$\hat{H}(k) = \begin{pmatrix} \hat{\beta} & e^{-ika} \hat{\kappa}_{1-} + \hat{\kappa}_{2+} \\ e^{ika} \hat{\kappa}_{1+} + \hat{\kappa}_{2-} & \hat{\beta} \end{pmatrix},$$

donde $\hat{\beta} = \frac{k_z^S - k_z^P}{2} \hat{\sigma}_z$ y $\hat{\kappa}_{i\pm} = \begin{pmatrix} \kappa_{ss,i} & \pm \kappa_{sp,i} \\ \mp \kappa_{sp,i} & -\kappa_{pp,i} \end{pmatrix}$.

7.3 Topology in the SP-SSH Lattice

The SP-SSH model allows exploring new topological phases beyond the conventional SSH model, as it incorporates two orbitals (S and P modes) whose linear combinations can be interpreted as a pseudospin. It becomes necessary to study the topology of the system since the spectrum of the Hamiltonian is insufficient to fully explain the behavior of this system, particularly due to the appearance of zero-energy edge states. By applying the unitary

transformation

$$\hat{U} = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 & 1 & 0 & 0 \\ 0 & 0 & 1 & -1 \\ 1 & -1 & 0 & 0 \\ 0 & 0 & 1 & 1 \end{pmatrix},$$

it becomes clearer how to interpret the system. In particular, for $\Delta\beta = 0$ and $\kappa_{ss,1} = \kappa_{pp,1}$ we have:

$$\hat{H} = \begin{pmatrix} \hat{H}_+ & 0 \\ 0 & \hat{H}_- \end{pmatrix},$$

with

$$\hat{H}_{\pm} = \begin{pmatrix} 0 & e^{-ika}(\kappa_{ss,1} \mp \kappa_{sp,1}) + (\kappa_{ss,2} \pm \kappa_{sp,2}) \\ e^{ika}(\kappa_{ss,1} \mp \kappa_{sp,1}) + (\kappa_{ss,2} \pm \kappa_{sp,2}) & 0 \end{pmatrix}.$$

That is, there are two SSH-type subsystems, with intercell (intracell) coupling $\kappa_{ss,1} \mp \kappa_{sp,1}$ ($\kappa_{ss,2} \pm \kappa_{sp,2}$). In the case where $\kappa_{ss,1} \neq \kappa_{pp,1}$ it is still possible to capture the topology through the determinant of $\hat{h} = e^{-ika}\hat{\kappa}_{1-} + \hat{\kappa}_{2+}$ (ver Figura 7.4) (see Figure 7.4), since in the complex plane the number of windings around the origin can be counted by sweeping all quasimomenta in the first Brillouin zone. These loops are a generalization of what was shown in Figure 2.6 regarding the angle formed by the projection in the xy plane of the vector $\mathbf{d}(k)$.

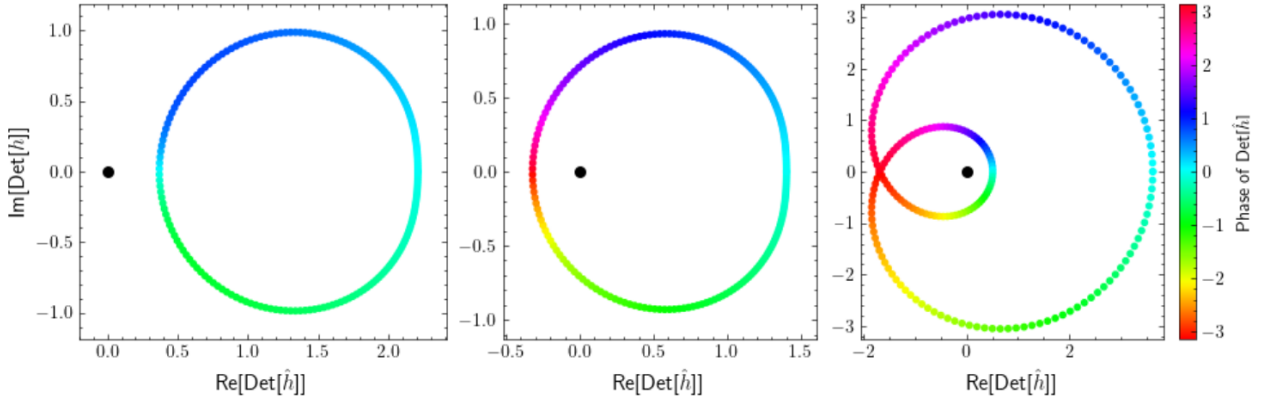


Figure 7.4: Topology of the SP-SSH lattice for $\Delta\beta = 0$. Determinant of the block matrix $\hat{h}$ for quasimomenta $-\frac{\pi}{a} \leq k < \frac{\pi}{a}$. Exactly three distinct topological phases are observed.

To obtain the full phase diagram (particularly for $\Delta\beta \neq 0$), it is sufficient to vary $\Delta\beta$ and observe when band gap closure occurs, as shown in Figure 7.5. The SP-SSH lattice exhibits two topological mechanisms: one due to SP hybridization and another due to dimerization.

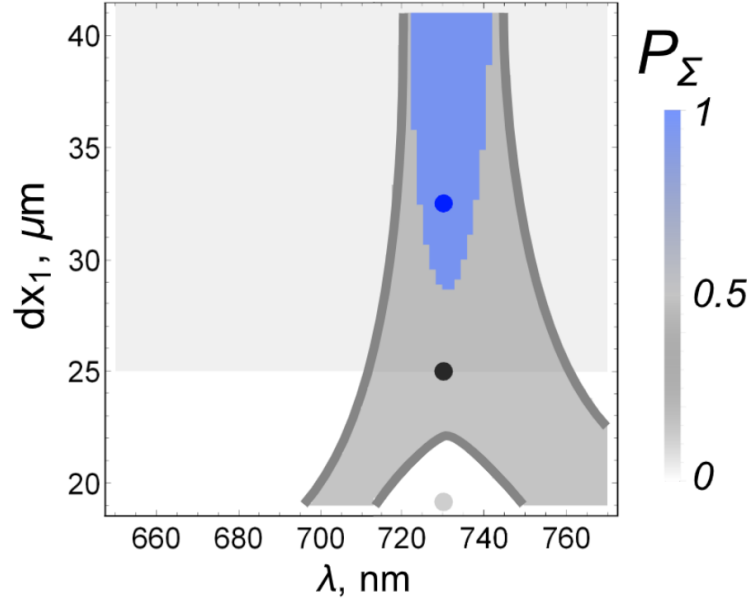


Figure 7.5: Topological phase diagram.

7.4 Experimental Implementation

To experimentally implement the SP-SSH model, 25 photonic lattices were fabricated using the femtosecond laser writing technique described in Chapter 4.1. The geometric parameters were adjusted with separations between molecules: variable dx_1 , $dx_2 = 25 \mu\text{m}$, $dy = 20 \mu\text{m}$ and between waveguides: $dx_0 = 7 \mu\text{m}$. The refractive index contrasts were optimized to achieve mode degeneracy: $k_z^S \sim k_z^P$ at $\lambda = 730 \text{ nm}$ [41]. Measurements were performed via wavelength scanning (Chapter 4.2) with $\lambda \in \{700, 780\} \text{ nm}$ and a step of 5 nm, aiming to control the parameter $\Delta\beta$, which depends directly on the wavelength used. Excitation was applied to the S waveguide at one end of the lattice, measuring the relative power at the same end ($I_{\text{edge}}/I_{\text{total}}$). Although the topological phases with bulk polarization¹ $P_\Sigma = 1/2$ or $P_\Sigma = 1$, are not initially clearly distinguishable, numerical analysis reveals that during the second topological transition the ratio $I_{\text{edge}}/I_{\text{total}}$ should form a plateau. Figure 7.6 confirms this behavior, while Figure 7.7 shows representative experimental results: one for $\lambda = 680 \text{ nm}$, where only dimerization-induced topology is observed, and another for $\lambda = 725 \text{ nm}$, where two topological transitions occur as dimerization changes.

¹topological invariant that allows distinguishing different topological phases.

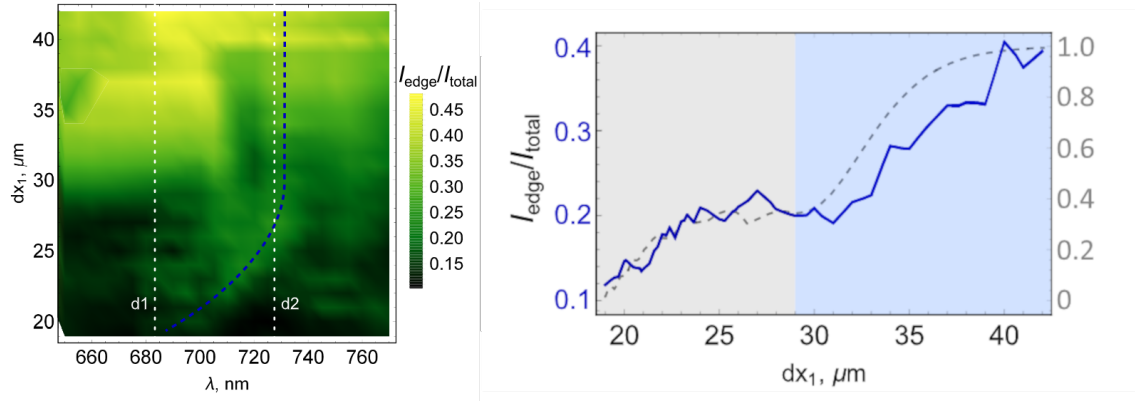


Figure 7.6: **Left:** Experimental results showing the characteristic plateau. **Right:** Quantitative comparison between experimental data (solid line) and simulations (dashed line).

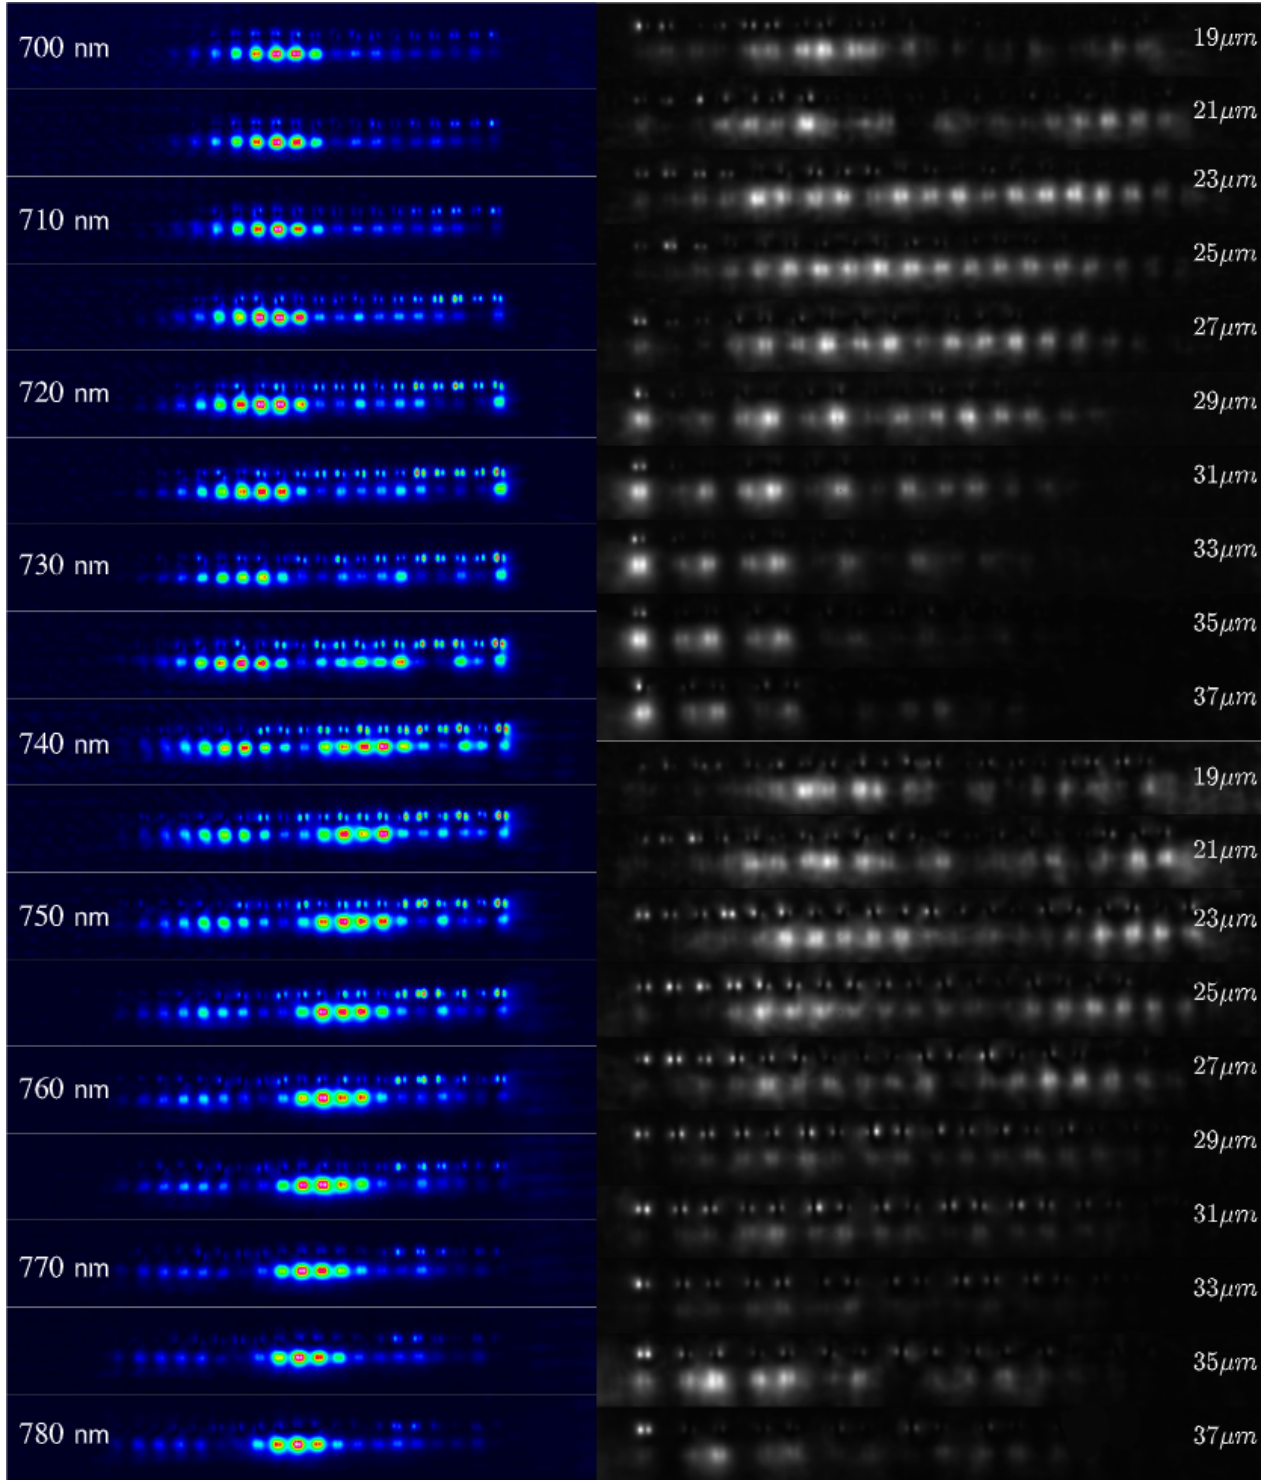


Figure 7.7: **Left:** Homogeneous SP-SSH lattice ($dx_1 = dx_2$) for different wavelengths. **Right:** Top: Excitation at 680 nm for different dimerizations. Bottom: Same excitation at 725 nm.

8. Conclusions

This thesis has systematically investigated the properties of discrete photonic lattices with non-conventional transverse modes, focusing on configurations that include P modes, SP inter-orbital couplings, and non-symmetric evanescent couplings. The research combined analytical tools, numerical simulations, and experimental validation to address different manifestations of the orbital structure of guided light.

In Chapter 5, a honeycomb-type photonic lattice composed of p_y modes was characterized, demonstrating that the *invisibility angle* induces a quasi-flat band regime around $\theta \approx 0.56$ radians. Through a detailed analysis incorporating non-orthogonality corrections and long-range couplings, it was established that Aharonov-Bohm-type confinement persists even in the presence of these perturbations. In particular, it was confirmed that non-orthogonality effects are essential to correctly describe localization at the lattice edges, which was quantified using the inverse participation ratio (IPR) and experimentally corroborated.

Chapter 6 addressed the phenomenon of non-symmetric evanescent coupling in photonic dimers with different refractive index contrasts. A generalization of coupled-mode theory was presented, including non-orthogonality terms, which allows correct modeling of the observed directional dynamics. Experimentally, an energy transfer imbalance dependent on the input channel was verified, in agreement with theoretical predictions based on non-symmetric effective coupling matrices.

In Chapter 7, the implementation of SP-SSH lattices constructed from photonic molecules was studied. It was demonstrated that structural dimerization, combined with hybridization between S and P modes, gives rise to two independently controllable topological phase transitions. Phases with different quantized bulk polarizations were identified, and an experimental protocol was designed to detect edge modes through the ratio $I_{\text{borde}}/I_{\text{total}}$ in excellent agreement with numerical simulations. This model extends the physics of the one-dimensional SSH system to the multi-orbital context, revealing new mechanisms of topological localization mediated by internal degrees of freedom.

From a methodological perspective, this thesis developed a continuous numerical method based on eigenmode expansion (EME), which extends coupled-mode theory to the regime of closely spaced waveguides or arbitrary refractive index contrasts. This approach was complemented by experimental techniques for fabricating and characterizing multi-orbital lattices, enabling the calibration of propagation constants for distinct guided modes.

The obtained results open new possibilities for designing photonic devices that exploit localization and control mechanisms based on geometry, transverse symmetry, and topology. Furthermore, a theoretical-experimental framework adaptable to more complex platforms is established, for example, in systems with orbital angular momentum [42].

Bibliography

- [1] All nobel prizes in physics. URL <https://www.nobelprize.org/prizes/lists/all-nobel-prizes-in-physics/>.
- [2] P. Maine, D. Strickland, P. Bado, M. Pessot, and G. Mourou. Generation of ultrahigh peak power pulses by chirped pulse amplification. *IEEE Journal of Quantum Electronics*, 24(2):398–403, 1988. doi: 10.1109/3.137.
- [3] M. Lewenstein, Ph. Balcou, M. Yu. Ivanov, Anne L’Huillier, and P. B. Corkum. Theory of high-harmonic generation by low-frequency laser fields. *Phys. Rev. A*, 49:2117–2132, Mar 1994. doi: 10.1103/PhysRevA.49.2117. URL <https://link.aps.org/doi/10.1103/PhysRevA.49.2117>.
- [4] P. M. Paul, E. S. Toma, P. Breger, G. Mullot, F. Augé, Ph. Balcou, H. G. Muller, and P. Agostini. Observation of a train of attosecond pulses from high harmonic generation. *Science*, 292(5522):1689–1692, 2001. doi: 10.1126/science.1059413. URL <https://www.science.org/doi/abs/10.1126/science.1059413>.
- [5] Thomas Brabec and Ferenc Krausz. Intense few-cycle laser fields: Frontiers of nonlinear optics. *Reviews of Modern Physics*, 72:545–591, 2000. URL <https://api.semanticscholar.org/CorpusID:120371634>.
- [6] J F Clauser and A Shimony. Bell’s theorem. experimental tests and implications. *Reports on Progress in Physics*, 41(12):1881, dec 1978. doi: 10.1088/0034-4885/41/12/002. URL <https://dx.doi.org/10.1088/0034-4885/41/12/002>.
- [7] Alain Aspect, Jean Dalibard, and Gérard Roger. Experimental test of bell’s inequalities using time-varying analyzers. *Phys. Rev. Lett.*, 49:1804–1807, Dec 1982. doi: 10.1103/PhysRevLett.49.1804. URL <https://link.aps.org/doi/10.1103/PhysRevLett.49.1804>.
- [8] Paul G. Kwiat, Klaus Mattle, Harald Weinfurter, Anton Zeilinger, Alexander V. Sergienko, and Yanhua Shih. New high-intensity source of polarization-entangled photon pairs. *Phys. Rev. Lett.*, 75:4337–4341, Dec 1995. doi: 10.1103/PhysRevLett.75.4337. URL <https://link.aps.org/doi/10.1103/PhysRevLett.75.4337>.
- [9] A. Ashkin, J. M. Dziedzic, and T. Yamane. Optical trapping and manipulation of single cells using infrared laser beams. *Nature*, 330(6150):769–771, Dec 1987. ISSN 1476-4687. doi: 10.1038/330769a0. URL <https://doi.org/10.1038/330769a0>.

- [10] Isamu Akasaki. Gan-based p-n junction blue-light-emitting devices. *Proc. IEEE*, 101(10):2200–2210, 2013. doi: 10.1109/JPROC.2013.2274928. URL <https://doi.org/10.1109/JPROC.2013.2274928>.
- [11] Michael Kneissl, Tae-Yeon Seong, Jung Han, and Hiroshi Amano. The emergence and prospects of deep-ultraviolet light-emitting diode technologies. *Nature Photonics*, 13(4):233–244, Apr 2019. ISSN 1749-4893. doi: 10.1038/s41566-019-0359-9. URL <https://doi.org/10.1038/s41566-019-0359-9>.
- [12] Shuji Nakamura, Takashi Mukai, and Masayuki Senoh. Candela-class high-brightness InGaN/AlGaN double-heterostructure blue-light-emitting diodes. *Applied Physics Letters*, 64(13):1687–1689, 03 1994. ISSN 0003-6951. doi: 10.1063/1.111832. URL <https://doi.org/10.1063/1.111832>.
- [13] Submarine cable frequently asked questions, . URL <https://www2.telegeography.com/submarine-cable-faqs-frequently-asked-questions>.
- [14] Hogares con acceso a internet fijo alcanzan el 67% y usuarios aumentan preferencia por redes de alta velocidad, . URL <https://www.subtel.gob.cl/hogares-con-acceso-a-internet-fijo-alcanzan-el-67-y-usuarios-aumentan-preferencia-por-redes-de-alta-velocidad>.
- [15] Zhaoyang Zhang, Shaohuan Ning, Hua Zhong, Milivoj R. Belić, Yiqi Zhang, Yuan Feng, Shun Liang, Yanpeng Zhang, and Min Xiao. Experimental demonstration of optical bloch oscillation in electromagnetically induced photonic lattices. *Fundamental Research*, 2(3):401–404, 2022. ISSN 2667-3258. doi: <https://doi.org/10.1016/j.fmre.2021.08.019>. URL <https://www.sciencedirect.com/science/article/pii/S2667325821001746>.
- [16] Tal Schwartz, Guy Bartal, Shmuel Fishman, and Mordechai Segev. Transport and anderson localization in disordered two-dimensional photonic lattices. *Nature*, 446(7131):52–55, Mar 2007. ISSN 1476-4687. doi: 10.1038/nature05623. URL <https://doi.org/10.1038/nature05623>.
- [17] Rodrigo A. Vicencio, Camilo Cantillano, Luis Morales-Inostroza, Bastián Real, Cristian Mejía-Cortés, Steffen Weimann, Alexander Szameit, and Mario I. Molina. Observation of localized states in lieb photonic lattices. *Phys. Rev. Lett.*, 114:245503, Jun 2015. doi: 10.1103/PhysRevLett.114.245503. URL <https://link.aps.org/doi/10.1103/PhysRevLett.114.245503>.
- [18] Sebabrata Mukherjee, Alexander Spracklen, Debaditya Choudhury, Nathan Goldman, Patrik Öhberg, Erika Andersson, and Robert R. Thomson. Observation of a localized flat-band state in a photonic lieb lattice. *Phys. Rev. Lett.*, 114:245504, Jun 2015. doi: 10.1103/PhysRevLett.114.245504. URL <https://link.aps.org/doi/10.1103/PhysRevLett.114.245504>.

- [19] Daniel Leykam, Alexei Andreanov, and Sergej Flach. Artificial flat band systems: from lattice models to experiments. *Advances in Physics: X*, 3(1):1473052, 2018. doi: 10.1080/23746149.2018.1473052. URL <https://doi.org/10.1080/23746149.2018.1473052>.
- [20] Rodrigo A. Vicencio. Photonic flat band dynamics. *Advances in Physics: X*, 6(1):1878057, 2021. doi: 10.1080/23746149.2021.1878057. URL <https://doi.org/10.1080/23746149.2021.1878057>.
- [21] Seababrata Mukherjee, Alexander Spracklen, Manuel Valiente, Erika Andersson, Patrik Öhberg, Nathan Goldman, and Robert R. Thomson. Experimental observation of anomalous topological edge modes in a slowly driven photonic lattice. *Nature Communications*, 8(1):13918, Jan 2017. ISSN 2041-1723. doi: 10.1038/ncomms13918. URL <https://doi.org/10.1038/ncomms13918>.
- [22] Lukas J. Maczewsky, Julia M. Zeuner, Stefan Nolte, and Alexander Szameit. Observation of photonic anomalous floquet topological insulators. *Nature Communications*, 8(1):13756, Jan 2017. ISSN 2041-1723. doi: 10.1038/ncomms13756. URL <https://doi.org/10.1038/ncomms13756>.
- [23] G. Cáceres-Aravena, L. E. F. Foa Torres, and R. A. Vicencio. Topological and flat-band states induced by hybridized linear interactions in one-dimensional photonic lattices. *Phys. Rev. A*, 102:023505, Aug 2020. doi: 10.1103/PhysRevA.102.023505. URL <https://link.aps.org/doi/10.1103/PhysRevA.102.023505>.
- [24] Roman S. Savelev and Maxim A. Gorlach. Topological states in arrays of optical waveguides engineered via mode interference. *Phys. Rev. B*, 102:161112, Oct 2020. doi: 10.1103/PhysRevB.102.161112. URL <https://link.aps.org/doi/10.1103/PhysRevB.102.161112>.
- [25] Falk Lederer, George I. Stegeman, Demetri N. Christodoulides, Gaetano Assanto, Moti Segev, and Yaron Silberberg. Discrete solitons in optics. *Physics Reports*, 463(1):1–126, 2008. ISSN 0370-1573. doi: <https://doi.org/10.1016/j.physrep.2008.04.004>. URL <https://www.sciencedirect.com/science/article/pii/S0370157308001257>.
- [26] S. Rojas-Rojas, E. Barriga, C. Muñoz, P. Solano, and C. Hermann-Avigliano. Manipulation of multimode squeezing in a coupled waveguide array. *Phys. Rev. A*, 100:023841, Aug 2019. doi: 10.1103/PhysRevA.100.023841. URL <https://link.aps.org/doi/10.1103/PhysRevA.100.023841>.
- [27] R. Julius, A. N. Alias, and M. S. A. Halim. Quantum squeezing in coupled waveguide networks with quadratic and cubic nonlinearity. *The European Physical Journal Plus*, 137(1):91, Jan 2022. ISSN 2190-5444. doi: 10.1140/epjp/s13360-021-02302-1. URL <https://doi.org/10.1140/epjp/s13360-021-02302-1>.

- [28] Joaquin Medina Dueñas, Gabriel O’Ryan Pérez, Carla Hermann-Avigliano, and Luis E. F. Foa Torres. Quadrature protection of squeezed states in a one-dimensional photonic topological insulator. *Quantum*, 5:526, August 2021. ISSN 2521-327X. doi: 10.22331/q-2021-08-17-526. URL <https://doi.org/10.22331/q-2021-08-17-526>.
- [29] M. Bayer, T. Gutbrod, J. P. Reithmaier, A. Forchel, T. L. Reinecke, P. A. Knipp, A. A. Dremin, and V. D. Kulakovskii. Optical modes in photonic molecules. *Phys. Rev. Lett.*, 81:2582–2585, Sep 1998. doi: 10.1103/PhysRevLett.81.2582. URL <https://link.aps.org/doi/10.1103/PhysRevLett.81.2582>.
- [30] Diego Román-Cortés, Maxim Mazanov, Rodrigo A. Vicencio, and Maxim A. Gorlach. Observation of invisibility angle and flat band physics in dipolar photonic lattices. *Nano Letters*, 25(11):4291–4297, 2025. doi: 10.1021/acs.nanolett.4c05951. URL <https://doi.org/10.1021/acs.nanolett.4c05951>. PMID: 40048281.
- [31] W. P. Su, J. R. Schrieffer, and A. J. Heeger. Solitons in Polyacetylene. *Physical Review Letters*, 42(25):1698–1701, June 1979. ISSN 0031-9007. doi: 10.1103/PhysRevLett.42.1698. URL <https://link.aps.org/doi/10.1103/PhysRevLett.42.1698>.
- [32] H. Haus, W. Huang, S. Kawakami, and N. Whitaker. Coupled-mode theory of optical waveguides. *Journal of Lightwave Technology*, 5(1):16–23, January 1987. ISSN 1558-2213. doi: 10.1109/JLT.1987.1075416. URL <https://ieeexplore.ieee.org/document/1075416/?arnumber=1075416>. Conference Name: Journal of Lightwave Technology.
- [33] John D. Joannopoulos, Steven G. Johnson, Joshua N. Winn, and Robert D. Meade. *Photonic crystals: molding the flow of light*. Princeton University Press, Princeton Oxford, 2nd edition edition, 2008. ISBN 978-0-691-12456-8.
- [34] Natalia Malkova, Ivan Hromada, Xiaosheng Wang, Garnett Bryant, and Zhigang Chen. Observation of optical shockley-like surface states in photonic superlattices. *Opt. Lett.*, 34(11):1633–1635, Jun 2009. doi: 10.1364/OL.34.001633. URL <https://opg.optica.org/ol/abstract.cfm?URI=ol-34-11-1633>.
- [35] Tomoki Ozawa, Hannah M. Price, Alberto Amo, Nathan Goldman, Mohammad Hafezi, Ling Lu, Mikael C. Rechtsman, David Schuster, Jonathan Simon, Oded Zilberberg, and Iacopo Carusotto. Topological photonics. *Reviews of Modern Physics*, 91(1):015006, March 2019. ISSN 0034-6861, 1539-0756. doi: 10.1103/RevModPhys.91.015006. URL <https://link.aps.org/doi/10.1103/RevModPhys.91.015006>.
- [36] J. Zak. Berry’s phase for energy bands in solids. *Physical Review Letters*, 62(23):2747–2750, June 1989. ISSN 0031-9007. doi: 10.1103/PhysRevLett.62.2747. URL <https://link.aps.org/doi/10.1103/PhysRevLett.62.2747>.

- [37] Xiao-Liang Qi and Shou-Cheng Zhang. Topological insulators and superconductors. *Rev. Mod. Phys.*, 83:1057–1110, Oct 2011. doi: 10.1103/RevModPhys.83.1057. URL <https://link.aps.org/doi/10.1103/RevModPhys.83.1057>.
- [38] János K. Asbóth, László Oroszlány, and András Pályi. *A Short Course on Topological Insulators*, volume 919 of *Lecture Notes in Physics*. Springer International Publishing, Cham, 2016. ISBN 978-3-319-25605-4 978-3-319-25607-8. doi: 10.1007/978-3-319-25607-8. URL <http://link.springer.com/10.1007/978-3-319-25607-8>.
- [39] Monika A. M. Marte and Stig Stenholm. Paraxial light and atom optics: The optical schrödinger equation and beyond. *Phys. Rev. A*, 56:2940–2953, Oct 1997. doi: 10.1103/PhysRevA.56.2940. URL <https://link.aps.org/doi/10.1103/PhysRevA.56.2940>.
- [40] Yonatan Plotnik, Or Peleg, Felix Dreisow, Matthias Heinrich, Stefan Nolte, Alexander Szameit, and Mordechai Segev. Experimental observation of optical bound states in the continuum. *Phys. Rev. Lett.*, 107:183901, Oct 2011. doi: 10.1103/PhysRevLett.107.183901. URL <https://link.aps.org/doi/10.1103/PhysRevLett.107.183901>.
- [41] Diego Guzmán-Silva, Gabriel Cáceres-Aravena, and Rodrigo A. Vicencio. Experimental observation of interorbital coupling. *Phys. Rev. Lett.*, 127:066601, Aug 2021. doi: 10.1103/PhysRevLett.127.066601. URL <https://link.aps.org/doi/10.1103/PhysRevLett.127.066601>.
- [42] Christina Jörg, Gerard Queraltó, Mark Kremer, Gerard Pelegrí, Julian Schulz, Alexander Szameit, Georg von Freymann, Jordi Mompart, and Verònica Ahufinger. Artificial gauge field switching using orbital angular momentum modes in optical waveguides. *Light: Science & Applications*, 9(1):150, Aug 2020. ISSN 2047-7538. doi: 10.1038/s41377-020-00385-6. URL <https://doi.org/10.1038/s41377-020-00385-6>.
- [43] Zhichan Hu, Domenico Bongiovanni, Ziteng Wang, Xiangdong Wang, Daohong Song, Jingjun Xu, Roberto Morandotti, Hrvoje Buljan, and Zhigang Chen. Topological orbital angular momentum extraction and twofold protection of vortex transport. *Nature Photonics*, 19(2):162–169, Feb 2025. ISSN 1749-4893. doi: 10.1038/s41566-024-01564-2. URL <https://doi.org/10.1038/s41566-024-01564-2>.
- [44] Ginés Lifante Pedrola. *Beam Propagation Method for Design of Optical Waveguide Devices*. Wiley, 2015. ISBN 9781119083382. URL <https://books.google.cl/books?id=ZV6-CgAAQBAJ>.
- [45] K. M. Davis, K. Miura, N. Sugimoto, and K. Hirao. Writing waveguides in glass with a femtosecond laser. *Optics Letters*, 21(21):1729, November 1996. ISSN 0146-9592, 1539-4794. doi: 10.1364/OL.21.001729. URL <https://opg.optica.org/abstract.cfm?URI=ol-21-21-1729>.

- [46] Bernd Terhalle. *Controlling Light in Optically Induced Photonic Lattices*. Springer, Berlin, Heidelberg, 2011. ISBN 978-3-642-16646-4 978-3-642-16647-1. doi: 10.1007/978-3-642-16647-1. URL <https://link.springer.com/10.1007/978-3-642-16647-1>.
- [47] Thorlabs - BC106N-VIS CCD Camera Beam Profiler, Ø30 µm - 6.6 mm, 350 - 1100 nm. URL <https://www.thorlabs.com>.
- [48] Herman J. C. Berendsen. Nuclear magnetic resonance study of collagen hydration. *The Journal of Chemical Physics*, 36(12):3297–3305, 06 1962. ISSN 0021-9606. doi: 10.1063/1.1732460. URL <https://doi.org/10.1063/1.1732460>.
- [49] M. Polini, Lewenstein Guinea, F., Manoharan H. C. M., and Pellegrini V. Artificial honeycomb lattices for electrons, atoms and photons. *Nature Nanotech*, 8, 2013. doi: 10.1038/nnano.2013.161. URL <https://doi.org/10.1038/nnano.2013.161>.
- [50] Seababrata Mukherjee, Marco Di Liberto, Patrik Öhberg, Robert R. Thomson, and Nathan Goldman. Experimental observation of aharonov-bohm cages in photonic lattices. *Phys. Rev. Lett.*, 121:075502, Aug 2018. doi: 10.1103/PhysRevLett.121.075502. URL <https://link.aps.org/doi/10.1103/PhysRevLett.121.075502>.
- [51] Rodrigo A. Vicencio, Diego Román-Cortés, Martín Rubio-Saldías, Paloma Vildoso, and Luis E. F. Foa Torres. Nonsymmetric evanescent coupling in photonics. *Phys. Rev. A*, 111:043510, Apr 2025. doi: 10.1103/PhysRevA.111.043510. URL <https://link.aps.org/doi/10.1103/PhysRevA.111.043510>.
- [52] Maxim Mazanov, Diego Román-Cortés, Gabriel Cáceres-Aravena, Christofer Cid, Maxim A. Gorlach, and Rodrigo A. Vicencio. Photonic molecule approach to multi-orbital topology. *Nano Letters*, 24(15):4595–4601, 2024. doi: 10.1021/acs.nanolett.4c00728. URL <https://doi.org/10.1021/acs.nanolett.4c00728>. PMID: 38574276.

Appendices

Appendix A Papers published in chronological order

www.nature.com/scientificreports

scientific reports



OPEN

Strain induced localization to delocalization transition on a Lieb photonic ribbon lattice

Diego Román-Cortés¹, Guillermo Fadic¹, Christofer Cid-Lara¹, Diego Guzmán-Silva¹, Bastián Real² & Rodrigo A. Vicencio^{1✉}

Ribbon lattices are kind of transition systems in between one and two dimensions, and their study is crucial to understand the origin of different emerging properties. In this work, we study a Lieb ribbon lattice and the localization–delocalization transition occurring due to a reduction of lattice distances (compression) and the corresponding flat band deformation. We observe how above a critical compression ratio the energy spreads out and propagates freely across the lattice, therefore transforming the system from being a kind of insulator into a conductor. We implement an experiment on a photonic platform and show an excellent agreement with the predicted phenomenology. Our findings suggest and prove experimentally the use of compression or mechanical deformation of lattices to switch the transport properties of a given system.

The understanding of transport and localization properties of different materials is the most relevant aspect in solid-state physics, not only from a fundamental point of view but also in terms of concrete applications. When synthesizing materials some deformations could emerge during the process; such as, compression, strain, defects and/or dislocations. However, they can also be added deliberately to enhance or to induce certain transport properties. In particular, compression and strain of materials have driven much attention lately because their transport properties can be dramatically modified. For instance, graphene can go from a semimetallic to an insulating phase when an uniaxial compression is applied^{1,2}, phenomenon known as Lifshitz transition. In other two-dimensional (2D) materials similar transitions have been predicted. For example, black phosphorus switches from a semiconductor into a metal when it is subjected to an uniaxial strain³. This allows the control of the electronic transport properties on a nanodevice when an external electric field is applied⁴, which can be interpreted as a delocalization–localization transition. And, for germanium kagome lattices⁵ a transformation from a semimetallic into a semiconductor is observed when applying compression due to an increment of the orbital frustration that induces an electronic gap. Furthermore, the electronic structure and charge properties were studied in KCuSe and KCuTe⁶, finding that pressure effectively modifies the transport properties due to an enhancement of carrier mobility, which could have direct applications in optoelectronic technologies as, e.g., solar cells.

On the other hand, during the last decade, artificial lattices have arisen as feasible platforms to emulate and test most of the electronic properties predicted for solid-state-like materials^{7–14}. Some of these systems have shown the ability to carefully engineer compression and, thus, exploring interesting phenomena that are sometimes unrealizable in natural and synthesized materials. For example, the Lifshitz transition of graphene has been addressed using matter waves in optical lattices¹⁵, waveguides arrays¹⁶, arrays of microwave resonators¹⁷ and exciton-polariton lattices¹⁸. In the latter system, a predicted semi-Dirac scenario arises in graphene at a critical compression, which produces a highly anisotropic transport and particular localization features. Remarkable also, it has been experimentally shown in graphene photonic lattices that a smart design in term of compression or strain could induce a pseudomagnetic field, causing the rupture of Dirac cones and the appearance of Landau levels in the band structure^{19–21}, which constitutes a clear delocalization–localization transition.

Besides compression properties, very fundamental condensed-matter phenomena has been experimentally proved in photonic lattices; e.g., Anderson localization²², topological insulation²³, and Flat Band (FB) localization^{24,25}. FB lattices have become an ideal solution for observing transport and localization phenomena on a completely periodic and linear configuration^{26–28}, as well as for studies considering highly degenerated and interacting systems^{29,30}. Moreover, during the last years, several contributions in optics have demonstrated

¹Departamento de Física and Millenium Institute for Research in Optics-MIRO, Facultad de Ciencias Físicas y Matemáticas, Universidad de Chile, Santiago, Chile. ²Univ. Lille, CNRS, UMR 8523—PhLAM—Physique des Lasers Atomes et Molécules, 59000 Lille, France. ✉email: rvicencio@uchile.cl

Photonic Molecule Approach to Multiorbital Topology

Maxim Mazanov, Diego Román-Cortés, Gabriel Cáceres-Aravena, Christofer Cid, Maxim A. Gorlach,* and Rodrigo A. Vicencio*



Cite This: *Nano Lett.* 2024, 24, 4595–4601



Read Online

ACCESS |


Metrics & More

Article Recommendations

Supporting Information

ABSTRACT: The concepts of topology provide a powerful tool to tailor the propagation and localization of the waves. While electrons have only two available spin states, engineered degeneracies of photonic modes provide novel opportunities resembling spin degrees of freedom in condensed matter. Here, we tailor such degeneracies for the array of femtosecond laser written waveguides in the optical range exploiting the idea of photonic molecules: clusters of strongly coupled waveguides. In our experiments, we observe unconventional topological modes protected by the Z_3 invariant arising due to the interplay of interorbital coupling and geometric dimerization mechanism. We track multiple topological transitions in the system with the change in the lattice spacings and excitation wavelength. This strategy opens an avenue for designing novel types of photonic topological phases and states.

KEYWORDS: femtosecond laser writing, photonic orbitals, interorbital coupling, topological photonics, topological edge states

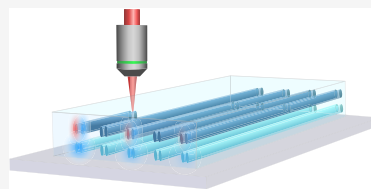

Topological photonics provides a versatile approach to shape the light flows by harnessing the topology of photonic bands.^{1–3} This enables disorder-robust topological states which can be achieved in plasmonic,⁴ photonic,^{5–7} or polaritonic^{8,9} systems operating from radiofrequency^{10,11} to the optical^{5,12} domain.

Experimental realization of optical topological structures is especially demanding because of relatively small feature size, narrow topological bandgaps, and losses. The major strategies to create topological structures for the optical domain include arrays of coupled ring resonators with engineered couplings^{6,13,14} or crystalline topological structures.^{7,12,15–17} While the former approach covers mostly the infrared range being hard to scale toward visible wavelengths, the latter strategy requires carefully designed lattice symmetry and does not provide much flexibility in reconfiguring the topological properties, creating pseudospin degrees of freedom, or tailoring effective spin–orbit interactions. Therefore, these approaches do not unlock the full functionalities available for photonic topological structures.

A recently suggested alternative is to optimize the responses of the *individual meta-atoms* achieving an accidental degeneracy of their modes.^{18–27} Such degenerate modes play a role analogous to the orbital or spin degrees of freedom in condensed matter or cold atom optical lattices.^{28–32} Since the number and the symmetry of the degenerate modes can be tailored on demand, this opens up a rich plethora of novel topological phases. While this appealing strategy can be implemented directly at microwave frequencies,³³ its realization in the visible range is severely hindered due to the fabrication limitations.

Here, we resolve this difficulty by experimentally realizing the concept of *photonic molecules*, a set of closely spaced waveguides which together give rise to photonic orbitals with different symmetries. Employing the femtosecond laser writing technique^{34–36}—an approach that has been consolidated as a key technique in physical lattice studies^{37–40}—to control the refractive index contrast, we create multiorbital photonic lattices such that fundamental *s* (symmetric or bonding) and horizontal excited *p* (antisymmetric or antibonding) modes become degenerate and interact with each other enabling rich physics.

The topological states in such lattice are protected by the Z_3 invariant and arise due to the combination of interorbital coupling and geometric dimerization mechanism. When those mechanisms add up constructively, the array hosts a pair of topological states at each end, which is a unique feature of optical lattices in the absence of long-range interactions. In our experiments, we track the topological transitions upon a change of the wavelength and lattice spacing observing multiple topological states.


The simplest photonic molecule consists of a couple of closely spaced identical elliptical waveguides [see Figure 1a–top], which give rise to the pair of symmetric (*s*) and antisymmetric (*p*) horizontal modes with the typical intensity

Received: February 9, 2024

Revised: March 27, 2024

Accepted: March 28, 2024

Published: April 4, 2024



Observation of Invisibility Angle and Flat Band Physics in Dipolar Photonic Lattices

Diego Román-Cortés,[¶] Maxim Mazanov,[¶] Rodrigo A. Vicencio,^{*} and Maxim A. Gorlach^{*}



Cite This: *Nano Lett.* 2025, 25, 4291–4297



Read Online

ACCESS |


Metrics & More

Article Recommendations

Supporting Information

ABSTRACT: Evanescently coupled waveguide arrays provide a tabletop platform to realize a variety of Hamiltonians, where physical waveguides correspond to the individual sites of a tight-binding lattice. Nontrivial spatial structure of the waveguide modes enriches this picture and uncovers further possibilities. Here, we demonstrate that the effective coupling between p -like modes of adjacent photonic waveguides changes its sign depending on their relative orientation vanishing for proper alignment at a so-called *invisibility angle*. Using femtosecond laser-written waveguides, we demonstrate this experimentally for p -mode dimers and graphene-like photonic lattices exhibiting quasi-flat bands at this angle. We observe diffraction-free propagation of corner and bulk states, providing robust experimental evidence of a two-dimensional Aharonov–Bohm-like caging in an optically switchable system.

KEYWORDS: flat bands, Aharonov–Bohm caging, photonic orbitals, laser-written waveguides

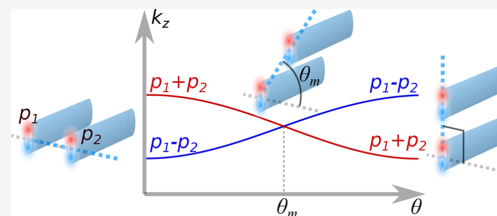

Photonic lattices have emerged as a versatile platform to explore localization and transport phenomena.^{1–3} As the paraxial equation governing light propagation in a single waveguide resembles Schrödinger equation in quantum mechanics, arrays of evanescently coupled waveguides provide a straightforward realization of paradigmatic tight-binding models⁴ with the possibility to accommodate such exotic features as negative couplings,^{5,6} artificial gauge fields,^{2,7} and non-Hermitian physics.^{8–10}

The development of this platform exhibits profound parallels with condensed matter physics and materials science¹¹ as illustrated in Figure 1. On a qualitative level, the formation of a material can be sketched as a coupling of atoms and formation of molecules; hybridization of molecular orbitals results in molecular aggregates and, finally, in the emergence of a 2D material. In the same spirit, the waveguides can be strongly coupled to each other to form photonic molecules.¹² The collective modes of those molecules with distinct symmetry can be readily identified as different orbitals, and their overlap determines the properties of a given photonic lattice. This parallel appears to be especially fruitful in light of the recent studies which demonstrated photonic molecule concept experimentally¹² and predicted a vast range of novel functionalities, including topological phases^{13,14} mediated by the coupling between different photonic orbitals.^{15–18}

Here, we add a crucial ingredient to this picture by introducing an *invisibility angle* in the photonic lattices. Specifically, we demonstrate theoretically and experimentally that a suitable arrangement of optical waveguides hosting p -type orbital modes results in a vanishing effective coupling between them. As a result, the lattice of such waveguides

features dispersionless bulk modes unlocking an all-bands-flat regime (ABF).^{19–21} A distinctive feature of this regime is photonic Aharonov–Bohm (AB) caging when an arbitrary initial state does not diffract into the bulk of the lattice, remaining confined in a finite spatial region, oscillating, and periodically recovering its initial profile.

The idea of an invisibility angle has some parallels with the magic angle concept in condensed matter literature,²² where it was introduced to denote unconventional electronic properties of twisted bilayer graphene, with flat bands and resulting superconducting behavior.^{23,24} The advancement of this concept resulted in the field of twistoronics²⁵ spanning such disciplines as condensed matter physics, polaritonics, and photonics.^{26,27}


The origin of the flat bands can be traced to the compact localized states,^{28–31} which are perfectly confined lattice eigenmodes. Typically, flat bands in tight-binding lattices arise due to the destructive interference in the so-called connector sites^{32–35} and require fine-tuning of the lattice parameters.^{19,36} However, having an *all band flat* regime is much less trivial. While in optical one-dimensional systems the ABF regime could be achieved by several means including multiorbital mechanisms^{6,15,16,37–39} or effective magnetic

Received: November 26, 2024

Revised: February 11, 2025

Accepted: March 3, 2025

Published: March 6, 2025



Nonsymmetric evanescent coupling in photonics

Rodrigo A. Vicencio^{1,2}, Diego Román-Cortés^{1,2}, Martín Rubio-Saldías^{1,2},
Paloma Vildoso^{1,2} and Luis E. F. Foa Torres¹

¹*Departamento de Física, Facultad de Ciencias Físicas y Matemáticas, Universidad de Chile, Santiago 8370448, Chile*

²*Millennium Institute for Research in Optics-MIRO, Universidad de Chile, Chile*

(Received 9 August 2024; accepted 28 March 2025; published 8 April 2025)

Asymmetrical interactions are ubiquitous in nature, and in physics their study becomes fundamental. Despite the prevalence of evanescent coupling in physics, little attention has been paid to wave function profiles, with symmetrical reciprocal interactions often assumed for practical reasons. This work challenges that assumption by analytically demonstrating the origin of nonsymmetrical coupling in a photonic platform, focusing on the behavior of evanescent tails from adjacent waveguides. We experimentally validate an asymmetrical dynamics by studying detuned photonic directional couplers, fabricated via femtosecond laser writing, and corroborate our findings through continuous numerical simulations.

DOI: [10.1103/PhysRevA.111.043510](https://doi.org/10.1103/PhysRevA.111.043510)

I. INTRODUCTION

A fundamental concept in lattice science is the study of localized wave functions bounded within well-defined spatial regions, such as waveguides or atoms. The tight-binding approximation [1] describes interactions between tightly bound orbitals at a given site that weakly interact with surrounding wave functions. This approach aims at examining the effects of weak coupling with neighboring sites. The approximation holds for well-separated sites where wave functions do not significantly overlap, as opposed to a strongly interacting regime [2,3]. In optics, analogous equations arise from coupled mode theory (CMT) [4], leading to key observations in transport and localization phenomena [5–9]. Here, the interwaveguide distance must exceed the waveguide widths to ensure minimal wave function distortion, allowing interactions between adjacent guided modes solely through evanescent fields. For more than two decades, research in photonic lattice phenomena [10–12] has predominantly assumed reciprocal coupling between waveguides. This assumption implies that the coupling constant between two waveguides is identical in both directions. Attempts to introduce nonreciprocity have mainly focused on simulating effective magnetic fields [9,13], which add a phase to the hopping terms but do not directly alter the wave function itself.

A nonreciprocal directional coupler (NRDC) was originally formulated long time ago in the context of resonant circuits [14]. Then, in the 1970s optical nonreciprocal devices started to be explored for integrated optics, and proposals for mode converters, isolators, and phase shifters were described [15]. Then, the validity of CMT was a main focus of research [16–19] looking for a better correspondence of the discrete model with exact numerical simulations. Some corrections to the simplest version of CMT were mandatory, with nonsymmetrical coupling constants being substantially different for nonidentical waveguides. At the end of the 1990s, magneto-optical waveguides were proposed for the construction of nonreciprocal Mach-Zehnder interferometers [20], and more

recently on-chip nonreciprocal optical resonators have been implemented in silicon [21]. Time modulation has been also suggested to implement nonreciprocity in compact integrated photonics, for example, using ringlike resonators or optomechanical cavities [22].

In this work, we demonstrate nonsymmetrical coupling interactions in photonic detuned dimers. We develop a standard formula for coupling coefficients considering steplike index waveguides, revealing the fundamental effect of evanescent profiles from neighboring waveguides. Our analysis shows that, opposite to the standard assumption, asymmetry is indeed an inherent property of photonic coupled systems, and it originates from the difference in refractive index profiles of two distant waveguides. Using the femtosecond (fs) laser writing technique [23], we fabricate photonic detuned couplers and experimentally demonstrate a nonsymmetrical dynamics. We corroborate all our observations through numerical simulations, without imposing any additional constraint but waveguide refractive index contrasts.

II. NONSYMMETRICAL PHOTONIC COUPLER MODEL

Let us start by studying a photonic coupler, such as the one sketched in Fig. 1(a), consisting of two waveguides separated a distance d . Coupled mode theory [24] generates different integrals which account for effective field interactions originated from the assumption that the total field is written as a linear combination of the modes at waveguides 1 and 2: $E_T = E_1 + E_2$. By assuming one-dimensional steplike index waveguides, we find different TE₀₀ (transverse electric) modes, such as the ones sketched in Fig. 1(b), for the indicated refractive index contrasts Δn_i . In this case, mode profiles at the waveguide region (core) are proportional to $\cos(\alpha_i x)$, while outside (cladding) they decay as $\exp(-\gamma_i |x|)$. Fields are better confined (larger α , γ) for a growing Δn , and the neighbor field will be larger at the stronger waveguide [see Fig. 1(b) inset]. Therefore, we naturally expect to observe an asymmetric coupling interaction $C_{ij} \neq C_{ji}$ for inhomogeneous

Observation of Non-Markovian Radiative Phenomena in Structured Photonic Lattices

Rodrigo A. Vicencio^{1,2,*}, Fabiola G.L. Cárcamo-Macaya,¹ Diego Román-Cortés^{1,2} and Pablo Solano^{3,†}

¹*Departamento de Física, Facultad de Ciencias Físicas y Matemáticas, Universidad de Chile, Santiago, Chile*

²*Millennium Institute for Research in Optics—MIRO, Santiago, Chile*

³*Departamento de Física, Facultad de Ciencias Físicas y Matemáticas, Universidad de Concepción, Concepción, Chile*

(Received 15 January 2025; accepted 4 June 2025; published 2 July 2025)

The spectral structure of a photonic reservoir shapes radiation phenomena for embedded quantum emitters. We implement an all-optical analog to study such an effect, particularly to observe the non-Markovian radiation dynamics of an emitter coupled to two-dimensional structured reservoirs. Its dynamics is simulated by light propagating through a photonic lattice, acting as a reservoir for an adjacent waveguide that mimics a coupled quantum emitter. We study radiation dynamics in square and Lieb lattices under different coupling regimes and observe how the flat band properties of the Lieb lattice significantly enhances light-matter coupling and non-Markovianity. Our platform opens a path for the experimental exploration of single-photon quantum optical phenomena in structured reservoirs to enhance light-matter interactions.

DOI: [10.1103/b3kw-vv3s](https://doi.org/10.1103/b3kw-vv3s)

The interaction between quantum emitters (QEs) and photonic modes plays a central role in quantum optics foundations and applications. Tailoring such interaction, by modifying the dispersion relation and dimensionality of the photonic medium [1–5], can lead to enhanced [6], suppressed [7], and directional interactions [8] and non-trivial radiation dynamics [9–12]. The band structure of the reservoir determines the density of states available to a coupled QE and, hence, its interaction strength. For example, placing a QE on resonance with the band edge of a photonics reservoir enhances light-matter interactions [13,14]. More recently, reservoirs with flat bands (FBs) that have, in general, a set of dispersive and nondispersive bands [15,16] with extended and compact states [17,18], respectively, have emerged as candidates to enhance such coupling [19–22].

Significant coupling and energy exchange between the QE and the reservoir manifest as non-Markovian radiative decay, a central example of the rich phenomenology lying beyond traditional quantum optics enabled by structured reservoirs [11,23–27]. While increasingly promising, embedding QEs in 2D materials with nontrivial band structures faces practical challenges that complicate experimental explorations of novel reservoir structures and collective effects of many indistinguishable emitters [28].

Photonic waveguide arrays (PWAs) offer a versatile platform to simulate QEs coupled to structured photonic reservoirs [10,29–32]. In such platforms, an array of evanescently coupled waveguides simulates a reservoir,

while a nearby individual waveguide plays the role of a QE, which decays into the reservoir (see Fig. 1). Light propagation through the whole PWA acts as an optical analog for the temporal evolution of the radiation phenomena [31]. In this sense, a PWA can reproduce quantum optical effects from cavity QED to waveguide QED in the weak and strong coupling regimes, in the same manner that coupled cavity arrays [33]. Although PWAs cannot simulate quantum systems in the nonlinear multiphoton regime, they can simulate collective effects of indistinguishable emitters [32] and the radiation dynamics of delayed-induced non-Markovian reservoirs [34]. Nonetheless, PWAs have an untapped potential to study the radiation phenomena of QEs coupled to arbitrary structured photonics reservoirs.

In this Letter, we experimentally study the decay dynamics of a single quantum emitter coupled to two-dimensional structured reservoirs, in an optical analog system. We

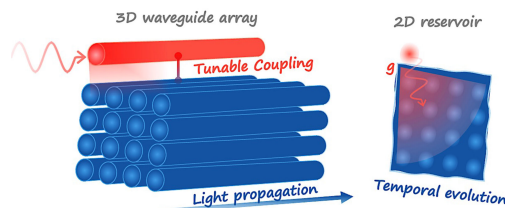


FIG. 1. Light propagating through a three-dimensional waveguide array simulates the temporal evolution of a quantum emitter coupled to a two-dimensional structured reservoir. Tunable couplings allow the experimental exploration of a wide range of coupling regimes.

*Contact author: rvicencio@uchile.cl

†Contact author: psolano@udec.cl

Appendix B Orthogonality of the normal modes

The orthogonality of the normal modes $\mathbf{E}_\nu^\perp$ can be demonstrated using the Einstein convention in equation (2.28) to simplify the notation:

$$T_{ij}E_j^\nu = \beta_\nu^2 E_i^\nu, \quad (1)$$

where the operator T_{ij} acts as $T_{ij}E_j \equiv \delta_{ij}(\nabla_\perp^2 + k_0^2 n^2)E_j + \partial_i(E_j \partial_j \ln(n^2))$.

To demonstrate the orthogonality of the modes E_i , it can be equivalently shown that T_{ij} is Hermitian:

$$\iint (T_{ij}E_j^\mu)^* E_i^\nu dA = \iint (E_i^\mu)^* (T_{ij}E_j^\nu) dA. \quad (2)$$

This property follows from the identity:

$$(T_{ji}E_i^\mu)^* E_j^\nu - (E_i^\mu)^* (T_{ij}E_j^\nu) = \nabla_\perp \cdot [E_i^\nu \nabla_\perp (E_i^\mu)^* - (E_i^\mu)^* \nabla_\perp E_i^\nu] + [E_j^\nu \partial_j (E_i^\mu)^* - (E_i^\mu)^* \partial_j E_j^\nu] \partial_i \ln(n^2).$$

When integrating over the transverse plane, the divergence term vanishes for guided modes (which decay at infinity), but the second term disappears only if $\nabla n^2 = \mathbf{0}$. That is, the operator T_{ij} is Hermitian only under the weak guidance condition.

The complete system is Hermitian, as demonstrated by starting from the equation (2.5):

$$\begin{aligned} \iiint_V (\nabla \times \nabla \times \mathbf{E}^\nu) \cdot (\mathbf{E}^\mu)^* dV &= \iiint_V n^2 \frac{\omega_\nu^2}{c^2} \mathbf{E}^\nu \cdot (\mathbf{E}^\mu)^* dV \\ \iiint_V [\nabla \times \nabla \times (\mathbf{E}^\mu)^*] \cdot \mathbf{E}^\nu dV &= \iiint_V n^2 \frac{\omega_\mu^2}{c^2} (\mathbf{E}^\mu)^* \cdot \mathbf{E}^\nu dV \end{aligned}$$

Subtracting both equations and applying the divergence theorem:

$$\frac{\omega_\nu^2 - \omega_\mu^2}{c^2} \iiint_V n^2 \mathbf{E}^\nu \cdot (\mathbf{E}^\mu)^* dV = \oint_{\partial V} [\dots] \cdot \hat{\mathbf{n}} dA \xrightarrow{\partial V \rightarrow \infty} 0$$

This yields two possibilities: either the modes are degenerate ($\omega_\nu^2 = \omega_\mu^2$), or we have $\iiint n^2 \mathbf{E}^\nu \cdot (\mathbf{E}^\mu)^* dV = 0$.

Appendix C Código en Python para cálculo de modos normales

```
1 # Scalar Eigenmode Solver
2
3 # Copyright (C) 2025 Diego Roman-Cortes
```

```

4
5 # This program is free software: you can redistribute it and/or modify
6 # it under the terms of the GNU General Public License as published by
7 # the Free Software Foundation, either version 3 of the License, or
8 # (at your option) any later version.
9
10 # This program is distributed in the hope that it will be useful,
11 # but WITHOUT ANY WARRANTY; without even the implied warranty of
12 # MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
13 # GNU General Public License for more details.
14
15 # You should have received a copy of the GNU General Public License
16 # along with this program. If not, see <https://www.gnu.org/licenses/>.
17
18 # contact: diego.roman.c@ug.uchile.cl
19
20 import numpy as np
21 from scipy.sparse import diags, linalg, spdiags, kronsum
22
23 # Define the parameters
24 Nx = 240
25 Ny = 240
26 Lx = 80E-6
27 Ly = 80E-6
28
29 x, dx = np.linspace(-Lx/2, Lx/2, Nx, retstep=True)
30 y, dy = np.linspace(-Ly/2, Ly/2, Ny, retstep=True)
31
32 X, Y = np.meshgrid(x, y, indexing="xy")
33
34
35 n0 = 1.48 # Refractive index of the background
36 dn1 = 4.00E-3 # Amplitude of the refractive index modulation
37 wavelength = 730E-9 # Wavelength of the light
38 k0 = 2 * np.pi / wavelength # Wavenumber
39
40 n_eigen = 4
41
42 wx1 = 0.9E-6 # Width of the refractive index modulation
43 wy1 = 3.3E-6
44
45 a1 = 25E-6
46
47 ##create matrix
48 if dx == dy:
49     # Create the 2D Laplacian matrix for dx = dy using the 5-point stencil
50     # 0 1 0
51     # 1 -4 1
52     # 0 1 0

```

```

53
54
55     diag0 = -4 * np.ones(Nx * Ny)
56     diag1 = np.ones(Nx * Ny - 1)
57     diag1[np.arange(1, Nx * Ny) % Nx == 0] = 0 # Remove wrap-around
connections
58     diagNx = np.ones(Nx * Ny - Nx)
59
60     diags_data = [diag0, diag1, diag1, diagNx, diagNx]
61     diags_offsets = [0, -1, 1, -Nx, Nx]
62
63     T = spdiags(diags_data, diags_offsets, Nx * Ny, Nx * Ny) / (dx**2)
64 else:
65     # Just the Kronecker sum of the 1D Laplacian matrices
66     diagx = np.ones([Nx])
67     diagy = np.ones([Ny])
68
69     diagsx = np.array([diagx, -2 * diagx, diagx])
70     diagsy = np.array([diagy, -2 * diagy, diagy])
71     Dx = spdiags(diagsx, np.array([-1, 0, 1]), Nx, Nx) / (dx**2)
72     Dy = spdiags(diagsy, np.array([-1, 0, 1]), Ny, Ny) / (dy**2)
73
74     T = kronsum(Dx, Dy)
75
76 def dn_func(X, Y, wx, wy):
77     output = np.tanh(33.0*np.exp(-(X/wx)**2- ((Y)/wy)**2))
78     return output
79
80
81 # Create the refractive index modulation
82 dn_array = np.zeros(X.shape)
83 dn_array += dn1 * dn_func(X, Y, wx1, wy1)
84
85 # Create the sparse matrix for the Helmholtz problem
86 n = n0 + dn_array
87 n = diags(n.reshape(Nx*Ny), (0))
88
89 H = T + (k0*n)**2
90
91 # Solve the eigenvalue problem
92 eigenvalues, eigenvectors = linalg.eigsh(H, k=n_eigen, which='LA')
93
94 np.save(f"eigenvalues.npy", eigenvalues)
95 np.save(f"eigenvectors.npy", eigenvectors)

```

Appendix D BPM C code

```
1 // Saves into a text file the output of a gaussian light beam propagating in a
   2D waveguide array
2
3 /*
4 Copyright (C) 2025  Diego Roman-Cortes
5
6 This program is free software: you can redistribute it and/or modify
7 it under the terms of the GNU General Public License as published by
8 the Free Software Foundation, either version 3 of the License, or
9 (at your option) any later version.
10
11 This program is distributed in the hope that it will be useful,
12 but WITHOUT ANY WARRANTY; without even the implied warranty of
13 MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.  See the
14 GNU General Public License for more details.
15
16 You should have received a copy of the GNU General Public License
17 along with this program.  If not, see <https://www.gnu.org/licenses/>.
18
19 contact: diego.roman.c@ug.uchile.cl
20 */
21
22 #include <stdio.h>
23 #include <stdlib.h>
24 #include <string.h>
25 #include <math.h>
26 #include <complex.h>
27 #include <fftw3.h>
28
29 int main(int argc, char* argv[]){
30     // number of points in grid
31     int Nx = 700;
32     int Ny = 700;
33     int Nz = 5000;
34
35     // parameters
36     double n0 = 1.48; // refraction index of borosilicate
37     double l0 = 730E-9; // wavelenght of light
38     double wx = 1.2E-6; // width of the waveguide
39     double wy = 3.0E-6; // height of the waveguide
40     double sigma = 8.0E-6; // width of LG-mode
41     double l = 0; // azimuthal parameter of LG-mode
42     double Lx = 350E-6; // width of the grid
43     double Ly = 350E-6; // height of the grid
44
45     double zmax = 50E-3; // propagation distance
46
47     // auxiliar variables
```

```

48     double dx = Lx/(Nx-1);
49     double dy = Ly/(Ny-1);
50     double dz = zmax/(Nz-1);
51     double k0 = 2*M_PI/10;
52     double beta = k0 * n0;
53     double xi, yj, r, phi;
54
55     //phi = atof(argv[1])*1E-9;
56     //printf("%f", phi);
57
58     double* dn = malloc(sizeof(double) * Nx * Ny);
59
60     // 1D array setup
61     double dn1 = 9.5E-4; // contrast of first waveguide
62
63     double d1x = 17E-6; // X separation of waveguides
64     double d1y = 18.5E-6; // Y separation of waveguides
65
66     // for animation
67     int frames = 50;
68     int rem, div;
69     char filename[10];
70
71     int i, j, k;
72
73     FILE *fp1, *fp2, *fp3;
74
75     //initialization of FFTW
76
77     fftw_init_threads();
78     fftw_complex *in = (fftw_complex*) fftw_malloc(sizeof(fftw_complex) * Nx *
79     Ny);
80     fftw_complex *aux = (fftw_complex*) fftw_malloc(sizeof(fftw_complex) * Nx
81     * Ny);
82     fftw_complex *out = (fftw_complex*) fftw_malloc(sizeof(fftw_complex) * Nx
83     * Ny);
84     fftw_plan_with_nthreads(8);
85
86     fftw_plan p_forward = fftw_plan_dft_2d(Nx, Ny, in, out, FFTW_BACKWARD,
87     FFTW_PATIENT);
88     fftw_plan p_inverse = fftw_plan_dft_2d(Nx, Ny, aux, in, FFTW_FORWARD,
89     FFTW_PATIENT);
90
91     fp1 = freopen("refractive2d.txt", "w", stdout);
92     // shape of refractive index contrast
93     for(i = 0; i < Nx; i++){
94         for(j = 0; j < Ny; j++){
95             xi = -0.5*Lx + i*dx;
96             yj = -0.5*Ly + j*dy;

```

```

92
93         for(int n=-9; n<10; n++){
94             dn[i+Nx*j] += dn1 * tanh(33.0 / (exp(((xi-n*d1x)/wx)*((xi-n*
95                 d1x)/wx) + ((yj)/wy)*((yj)/wy))));
96             }
97             printf("%e\n", dn[i+Nx*j]);
98         }
99         printf("\n");
100     }
101     fclose(fp1);
102
103     // initial field (gaussian)
104     for(i = 0; i < Nx; i++){
105         for(j = 0; j < Ny; j++){
106             xi = -0.5*Lx + i*dx;
107             yj = -0.5*Ly + j*dy;
108             r = sqrt((xi)*(xi) + (yj)*(yj));
109             in[i+Nx*j] += (cexp(-r*r/(sigma*sigma))); // hermite-gaussian mode
110         }
111     }
112     // save the input (gaussian) in a text file
113     fp2 = freopen("00.txt", "w", stdout);
114     for(i = 0; i < Nx; i++){
115         for(j = 0; j < Ny; j++){
116             xi = -0.5*Lx + i*dx;
117             yj = -0.5*Ly + j*dy;
118             printf("%e\n", cabs(in[i+Nx*j])*cabs(in[i+Nx*j]));
119         }
120         printf("\n");
121     }
122     fclose(fp2);
123
124     // frequency indices
125     int freqidx[Nx + Ny];
126
127     for(i=0; i < Nx/2; i++){
128         freqidx[i] = i;
129     }
130     for(j=0; j < Ny/2; j++){
131         freqidx[Nx+j] = j;
132     }
133     for(i=Nx/2; i < Nx; i++){
134         freqidx[i] = i-Nx;
135     }
136     for(j=Ny/2; j < Ny; j++){
137         freqidx[Nx+j] = j-Ny;
138     }
139

```

```

140     fftw_complex *phase = (fftw_complex*) fftw_malloc(sizeof(fftw_complex) *
141     Nx * Ny);
142     for(i = 0; i < Nx; i++){
143         for(j = 0; j < Ny; j++){
144             phase[i+j*Nx] = cexp(I*dz*( (2*M_PI) * (2*M_PI) * ( (freqidx[i]/Lx
145             ) * (freqidx[i]/Lx) + (freqidx[Nx+j]/Ly) * (freqidx[Nx+j]/Ly) )/(4*beta)));
146         }
147     }
148
149     // main loop
150
151     for(k=1; k <= Nz; k++){
152
153         fftw_execute(p_forward); // 'out' now points towards the DFT of 'in'
154
155         for(i = 0; i < Nx*Ny; i++){
156             aux[i] = out[i] * phase[i];
157         }
158
159         fftw_execute(p_inverse); // 'in' now points towards the inverse DFT of
160         'aux'
161
162         for(i = 0; i < Nx * Ny; i++){
163             in[i] /= (Nx * Ny); // normalization of FFT
164             in[i] *= cexp(-I * k0 * (((n0+dn[i])*(n0+dn[i]))- (n0*n0)) * dz
165             /(2*n0)); // potential operator in real space
166         }
167
168         fftw_execute(p_forward); // 'out' now points towards the DFT of 'in'
169
170         for(i = 0; i < Nx*Ny; i++){
171             aux[i] = out[i] * phase[i];
172         }
173
174         fftw_execute(p_inverse); // 'in' now points towards the inverse DFT of
175         'aux'
176
177         for(i = 0; i < Nx * Ny; i++){
178             in[i] /= (Nx * Ny); // normalization of FFT
179         }
180
181         // save to txt
182         rem = k % (Nz/frames);
183         if(rem == 0){
184             div = k / (Nz/frames);
185             sprintf(filename, "%02d.txt", div);
186
187             fp3 = freopen(filename, "w", stdout);
188
189             for(i = 0; i < Nx; i++){

```



```

184         for(j = 0; j < Ny; j++){
185             printf("%e\n", cabs(in[i+j*Nx])*cabs(in[i+j*Nx]));
186         }
187         printf("\n");
188     }
189     fclose(fp3);
190 }
191
192 }
193 fftw_cleanup_threads();
194 fftw_destroy_plan(p_forward);
195 fftw_destroy_plan(p_inverse);
196 fftw_free(in);
197 fftw_free(aux);
198 fftw_free(out);
199 fftw_free(phase);
200 free(dn);
201 return 0;
202 }

```

Appendix E Hologram generator Python code

```
1 # Copyright (C) 2024 Diego Roman-Cortes
2 #
3 # This program is free software: you can redistribute it and/or modify
4 # it under the terms of the GNU General Public License as published by
5 # the Free Software Foundation, either version 3 of the License, or
6 # (at your option) any later version.
7 #
8 # This program is distributed in the hope that it will be useful,
9 # but WITHOUT ANY WARRANTY; without even the implied warranty of
10 # MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
11 # GNU General Public License for more details.
12 #
13 # You should have received a copy of the GNU General Public License
14 # along with this program. If not, see <https://www.gnu.org/licenses/>.
15 #
16 # e-mail: diego.roman.c@ug.uchile.cl
17
18 import numpy as np
19 import matplotlib.pyplot as plt
20 from PIL import Image, ImageChops
21 from scipy.special import eval_genlaguerre
22 from scipy import signal
23
24 my_dpi = 120 #120
25 plt.style.use('dark_background')
26
27 WIDTH = 1920
28 HEIGHT = 1080
29
30 sigma = HEIGHT/4
31
32 sigmax = HEIGHT/2.2/4*2.2
33 sigmay = HEIGHT/5.0*1.1
34
35 x = np.linspace(-WIDTH/2, WIDTH/2, num=WIDTH)
36 y = np.linspace(-HEIGHT/2, HEIGHT/2, num=HEIGHT)
37
38 Xn, Yn = np.meshgrid(x, y, indexing='xy')
39
40 angle = -0.05
41 X = Xn*np.cos(angle) - Yn*np.sin(angle)
42 Y = Yn*np.cos(angle) + Xn*np.sin(angle)
43
44 Z = np.zeros(X.shape, dtype=complex)
45 Z += (np.exp(-(X)/sigma/1.0)**2)*np.exp(-(Y)/sigma)**2) # any function of x
    and y
46 Z /= np.sqrt(np.sum(np.abs(Z)**2))
47
```

```

48 phase = (np.angle(Z)+np.pi) * 255.0 / (2*np.pi)
49
50 fig = plt.figure(figsize=(1920/my_dpi, 1080/my_dpi), dpi=my_dpi)
51
52 plt.imsave('fase.png', phase, cmap="gray", vmin=0, vmax=255)
53 plt.close("all")
54
55 fig = plt.figure(figsize=(1920/my_dpi, 1080/my_dpi), dpi=my_dpi)
56
57 blaze = (signal.sawtooth(Xn*2.0*np.pi/5.0) + 1)/2.0*255
58
59 plt.imsave('blaze.png', blaze, cmap="gray", vmin=0, vmax=255)
60 plt.close("all")
61
62 fig = plt.figure(figsize=(1920/my_dpi, 1080/my_dpi), dpi=my_dpi)
63
64 amplitude = (np.abs(Z)**2/np.max(np.abs(Z)**2)) * blaze/255
65 amplitude /= amplitude.max()
66 amplitude *= 255
67
68
69 plt.imsave('amplitude.png', amplitude, cmap="gray", vmin=0, vmax=255)
70 plt.close("all")
71
72
73 im1 = np.array(Image.open('amplitude.png').convert('L'), dtype="uint16")
74 im2 = np.array(Image.open('fase.png').convert('L'), dtype="uint16")
75
76 imf = (((amplitude + phase) % 255))
77 im = (imf).astype(np.uint8)
78
79 plt.imsave('vortex2.png', im, cmap="gray", vmin=0, vmax=255)

```