# “Is this safe to publish?” is three questions.

Every tool on the market answers it with one confidence score, which is why nobody can act on the answer. CreatorProof runs three independent evidence lanes, reports what it could not check, and keeps detection strictly separate from the decision.

**LANE 1 · COPY**

Does this reuse a work in the declared catalogue, and exactly which region of it?

**LANE 2 · ORIGIN**

What evidence exists that a generative model was involved in making it?

**LANE 3 · PROFILE**

Does new content resemble a registered creator’s body of work?

**DECISION**

Policy and rights are applied after the evidence, never inside the models.

**Blockchain Olympiad Bangladesh 2026**
Finals · Architecture & Infrastructure
Doubles as the technical documentation for the final-round submission

**Build**
CreatorProof v0.10.0
SSCD · CSD ViT-L · Community Forensics · C2PA · MAGSAC

# 00 How to use this pack



Each sheet carries one diagram with **numbered badges**, the numbered explanation beneath it, and the sentence to say out loud while pointing. The last two sheets are a rapid-fire answer set for the Q&A session, each answer tagged with the diagram to turn to.

## CONTENTS


| | | | | | |
|---|---|---|---|---|---|
| A1 | Three questions, not one | Core | A2 | Serving topology | System |
| A3 | The inference pipeline | Flow | A4 | Copy lane | Models |
| A5 | Origin lane | Models | A6 | Creator-profile lane | Models |
| A7 | Detection / decision firewall | Design | A8 | Coverage before verdict | Design |
| A9 | Retrieval at scale | Infra | A10 | Model lab and promotion | MLOps |
| A11 | Explainability | UX | A12 | Responsible AI | Ethics |
| A13 | Benchmarks | Evidence | A14 | The proof layer | Output |
| A15 | Q&A armory, part one | Defence | A16 | Q&A armory, part two | Defence |


## ARROW GRAMMAR

Line style carries meaning throughout this pack. An arrow is never decoration.

- Data movement
- Decision or control
- Signature binding
- Public commitment

## LANE COLOURS

COPY EVIDENCE · ORIGIN EVIDENCE · PROFILE EVIDENCE · POLICY OUTCOME

### OPENING LINE

A brand is about to publish an image and asks one question: is this safe? Every product on the market answers with a single percentage, and a percentage is not something a legal team can act on.

So we split it into three questions that have different evidence, different failure modes, and different consequences.


## WHERE EACH BCOLBD CRITERION IS ANSWERED

| EVALUATION CRITERION | POINTS | ANSWERED ON |
|---|---|---|
| Vision & Problem Statement | 30 | A1 why one score fails · A7 detection separated from decision · A11 what the user actually receives |
| Architecture & Infrastructure | 30 | A2 serving topology · A3 pipeline · A4–A6 per-lane model design · A9 scaling and infrastructure estimate |
| Risks & Challenges | 20 | A8 abstention and failure semantics · A10 drift and promotion gates · A12 responsible-AI risks |
| Technical completeness & inference model | 40 | A3 stage contract · A4–A6 exact models and thresholds · A10 reproducibility · A13 measured results |
| Use case & existing solutions | 10 | A1 comparison with single-score tools · A15–16 the objections in full |

# A1 Three questions, not one

THE CORE ARGUMENT

"Is this safe to publish?" collapses three unrelated questions with three different kinds of evidence. **Averaging them into one score destroys the only information a reviewer can act on** — which question failed, and why.

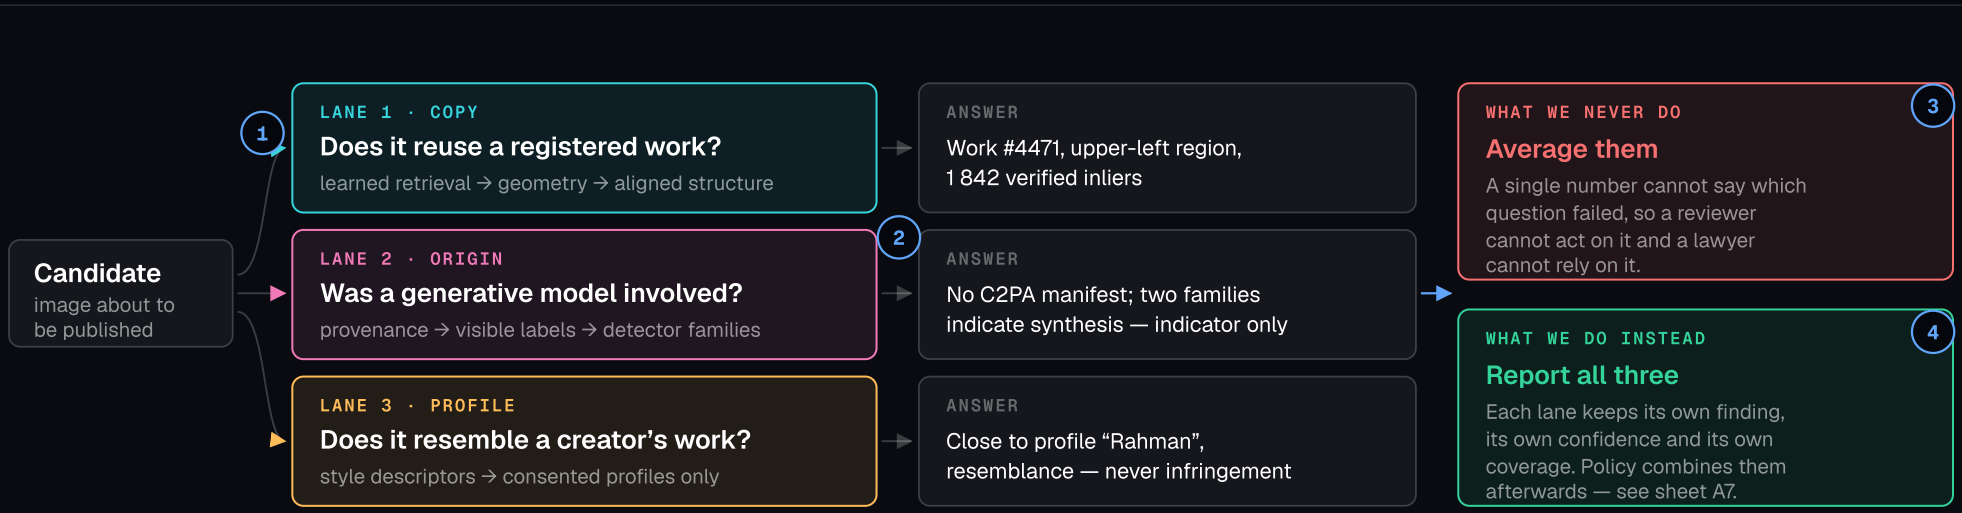


A1 · One input, three independent verdicts. They are reported side by side and never fused into a score.

1 **Genuinely independent.** Each lane uses different models on different evidence, so a failure in one cannot silently corrupt another.

2 **Answers are specific.** Not "87% risky" but which work, which region, how many verified matching points.

3 **Averaging destroys meaning.** A blended score cannot distinguish "clear copy" from "vaguely similar style", yet those need opposite actions.

4 **Separation is the product.** Three answers plus coverage is what makes the output usable by a legal team rather than merely interesting.

### SAY THIS

Every competitor returns one number. But a copy of a photo you already licensed and a picture that merely resembles someone's style require completely opposite actions.

One score cannot tell those apart, so we refuse to produce one.

### IF THEY PUSH BACK


*"Isn't this just reverse image search?"* Reverse search finds similar pictures on the open web. We search a declared rights-bearing catalogue and then geometrically prove which region of which work was reused.

*"Why not one big vision model?"* A general model gives a plausible-sounding sentence. We need a reproducible, hash-stable output, because the result gets signed and anchored — a model that phrases things differently on a re-run cannot be evidence.

# A2 Serving topology

HOW INFERENCE IS ACTUALLY DEPLOYED

Inference is **asynchronous and horizontally scaled**: the API accepts a scan and returns immediately, and GPU workers pull from a durable queue. Nothing about a request is blocked on a model that takes two seconds.

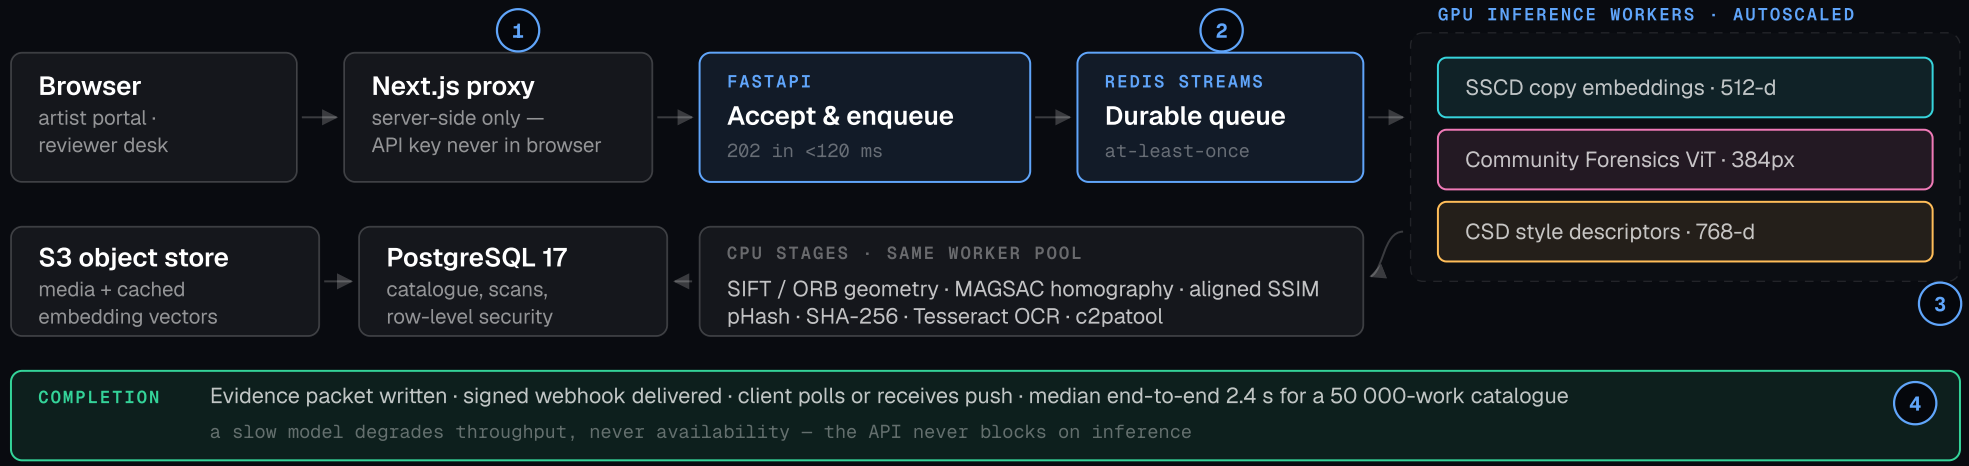


A2 · The API layer is stateless and cheap; only the worker tier needs GPUs, and only that tier scales with load.

1. **Credentials never reach the browser.** The Next.js layer proxies server-side, so no API key is exposed to a client device.
2. **A durable queue, not a thread.** A worker crash mid-scan replays the job rather than losing the customer's request.
3. **Only workers need GPUs.** The expensive tier scales independently, which is what keeps unit cost predictable.
4. **Latency is a product decision.** Returning in milliseconds and completing in seconds keeps the integration simple for the customer.


SAY THIS

The architecture assumes models are slow and occasionally unavailable. Everything expensive sits behind a durable queue, so the worst a model failure can do is slow a queue down — never take the service off the air.

# A3 The inference pipeline, stage by stage

END-TO-END FLOW

Eight stages, each of which reports its own outcome and its own coverage. These are the exact stage names the API streams to the client, so **what the judge sees in the demo matches this diagram label for label**.

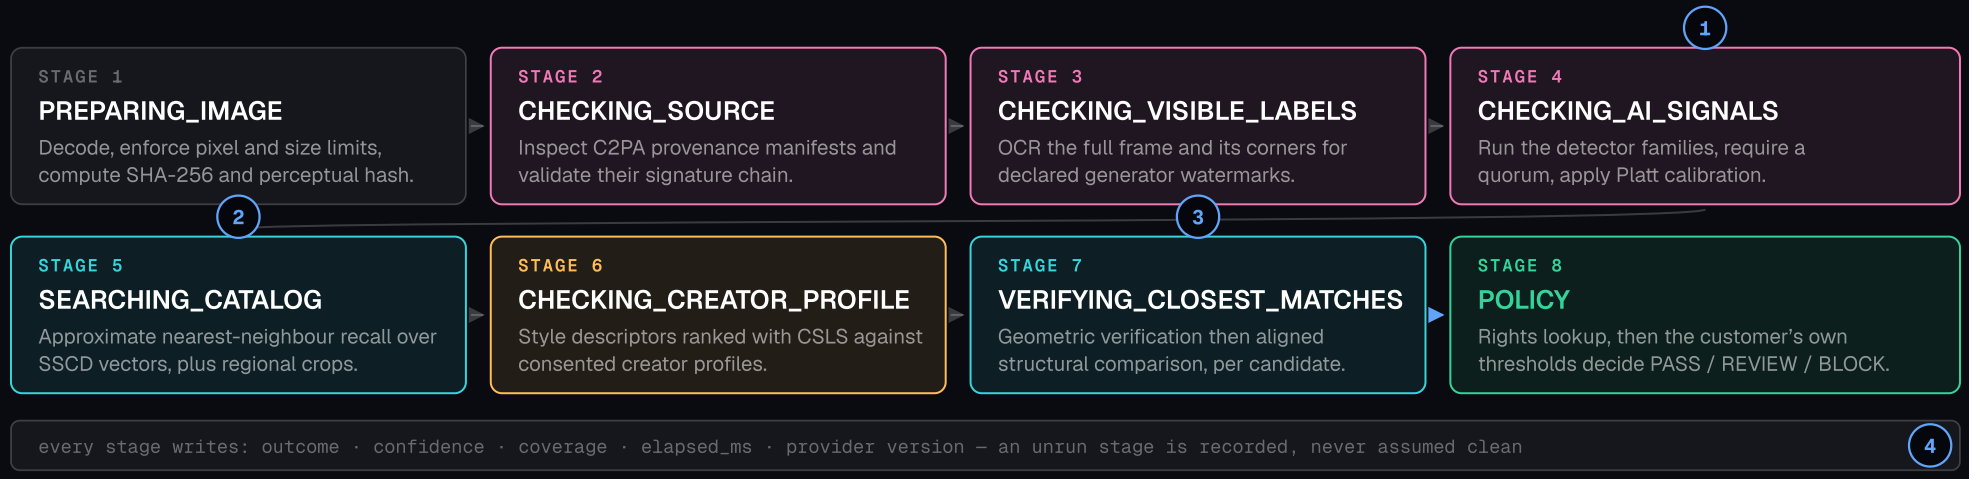


A3 · Stages 2-4 are the origin lane, 5 and 7 the copy lane, 6 the profile lane. Policy runs last, on evidence only.

1. **Provenance outranks statistics.** A valid C2PA manifest is hard evidence and is trusted above any statistical detector.
2. **Recall then verify.** A cheap vector search proposes candidates; expensive geometry only runs on the shortlist.
3. **Verification is per candidate.** Each shortlisted work is independently proven or rejected, so one strong match cannot drag others along.
4. **Coverage travels with the result.** If a stage could not run, that fact is recorded and surfaced rather than quietly ignored.


SAY THIS

Watch the stage names during the demo — they are the same eight you see here. Each one records not just what it found but whether it was able to look at all, and that second field is what makes the first one trustworthy.

# A4 Copy lane — recall, then proof

LANE 1 · SAME WORK REUSED

A neural embedding is fast but only ever suggests. **Nothing becomes a match until classical geometry proves a pixel-level correspondence** and an aligned structural comparison agrees — so an embedding that is merely confused cannot accuse anyone.

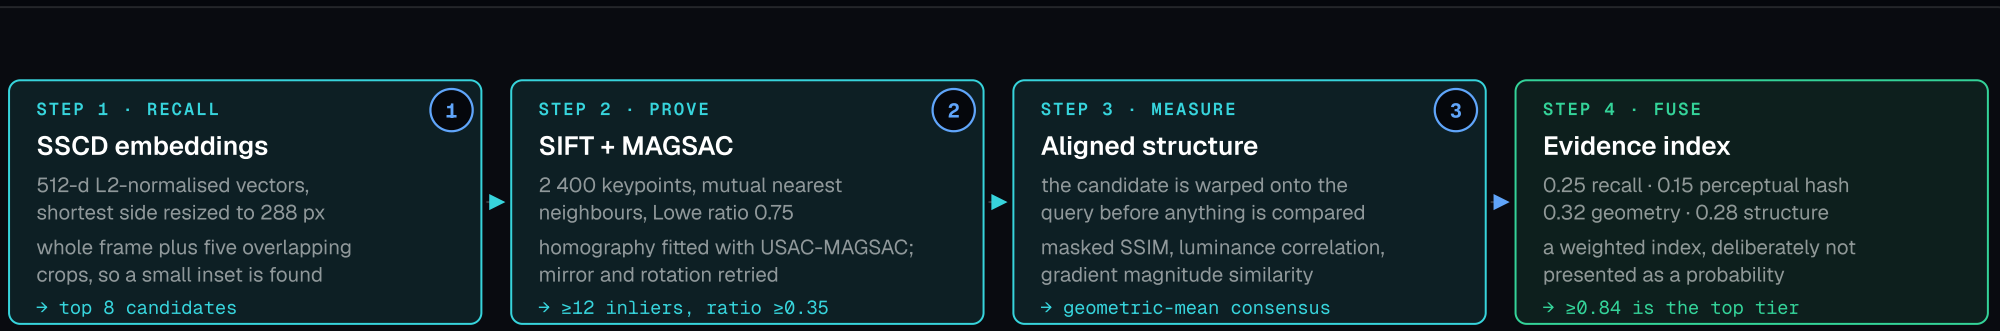


THE RULE THAT PREVENTS A FALSE ACCUSATION

4

**Similarity alone can never produce a match.**

Unless the files are byte-identical, a MATCH_FOUND requires validated geometry and aligned structural agreement. Similarity and hash distance are supporting evidence only.

WHAT THE LANE IS ALLOWED TO OUTPUT

| | |
|---|---|
| MATCH_FOUND | proved, region identified |
| NO_MATCH_IN_CHECKED_SOURCES | searched, nothing found |
| INCONCLUSIVE | SCOPE_INCOMPLETE · ERROR |

A4 · Learned retrieval proposes; classical computer vision disposes. The order of those two is the whole design.

1. **Crops are searched too.** A logo lifted into the corner of a banner is found because five regional views are queried alongside the whole frame.
2. **Geometry is not a score.** It either fits a consistent transform between the two images or it does not, and we store the matching point pairs as evidence.
3. **Compare after aligning.** Measuring structure on un-aligned images is meaningless; we warp first, then measure only the overlapping area.
4. **Two independent confirmations.** Geometry and structure use unrelated mathematics, so both agreeing is what earns the word “match”.

SAY THIS

The embedding is a librarian — it fetches eight books that might be the one. The geometry is the proof: it finds hundreds of specific points that line up under a single consistent transform.

Only the second one is allowed to say the word “match”.

IF THEY PUSH BACK


*“Embeddings can be fooled by adversarial noise.”* Which is exactly why they cannot decide. An adversarial vector might get a work into the shortlist, but it cannot manufacture 12 geometrically consistent keypoint correspondences with a work it did not copy.

*“What about crops, rotations and re-encodes?”* The homography absorbs crop, scale, rotation and mirror; JPEG re-encoding barely moves SSCD vectors. Our transform benchmark covers 26 of these and is on sheet A13.

# A5 Origin lane — a ladder, not a verdict

LANE 2 · WAS A MODEL INVOLVED

AI detection is the least reliable claim in this space, so we rank the evidence by how much it deserves to be trusted. **Cryptographic provenance beats a declared label, which beats a statistical detector** — and the detector tier is advisory by default.

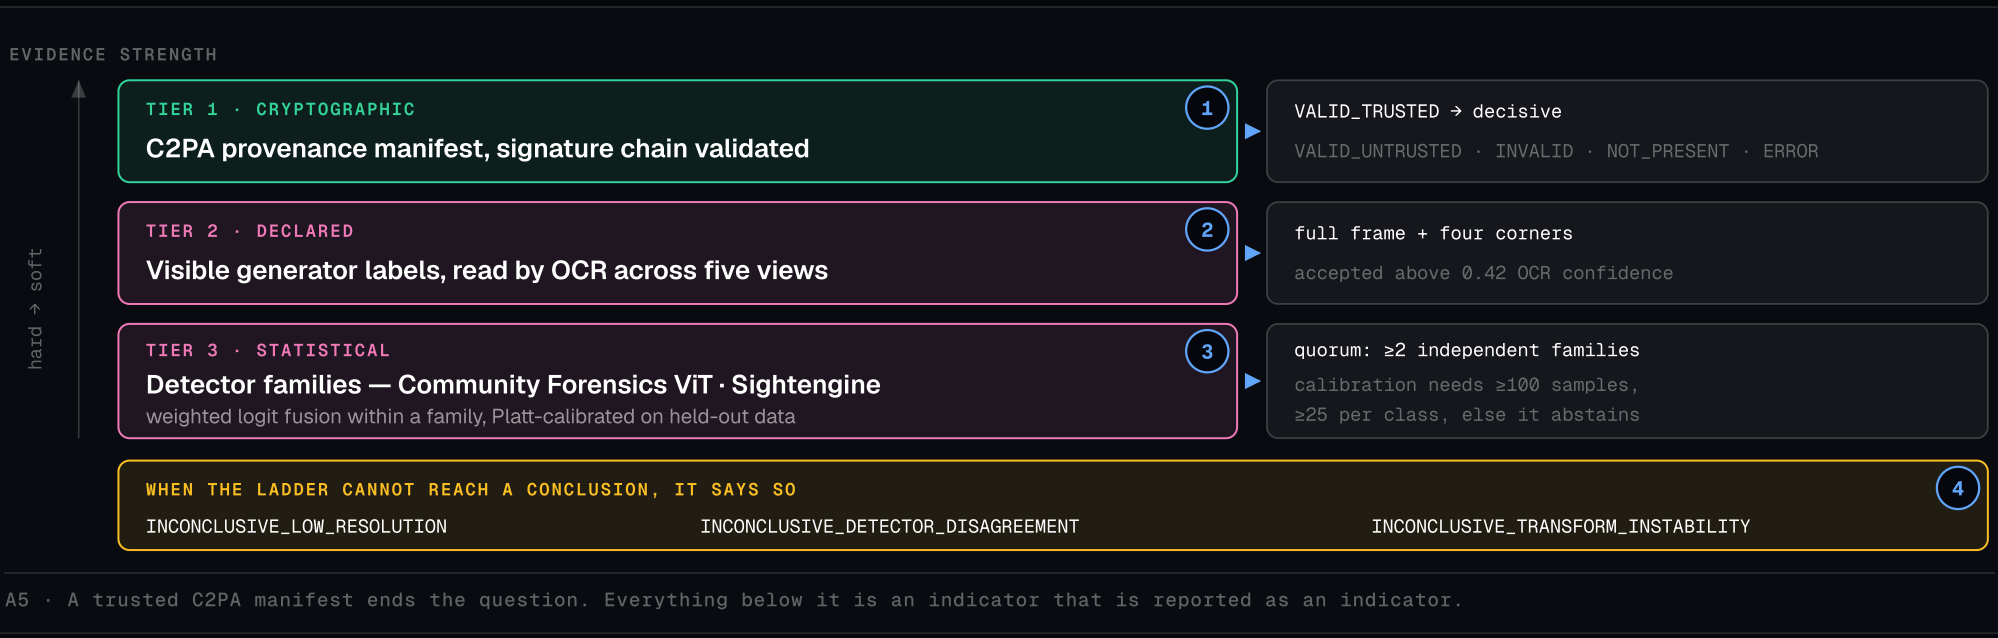


1. **Provenance is decisive.** A validated manifest is a signed statement from the tool that made the file, so it outranks every statistical guess.
2. **Labels are read, not assumed.** We OCR the corners specifically, because that is where generators put their marks and where crops remove them.
3. **One detector is never enough.** Two independent model families must agree, and each must be calibrated on held-out data before its number is used at all.
4. **Abstention is a first-class result.** Low resolution, disagreement or instability under re-crop each produce a named inconclusive state rather than a coin flip.

**SAY THIS**

Everyone in this room knows AI detectors are unreliable. So we treat them as the weakest tier of a ladder, require two independent families to agree, and by default the whole lane is advisory — it cannot block a publication on its own.

**IF THEY PUSH BACK**


*"AI detectors have terrible false-positive rates."* Agreed, which is why this lane cannot change the copy verdict and defaults to informational. It reports evidence; a customer who wants it to gate publication must opt in explicitly.

*"C2PA is barely adopted."* True today and improving fast — Adobe, Leica, OpenAI and Google all emit it. Our architecture is built so that as adoption rises, the hard tier absorbs cases the statistical tier currently handles.

# A6 Creator-profile lane — resemblance, stated as resemblance



Style is not copyrightable, and we never say it is. This lane exists because a creator whose body of work is being imitated at scale deserves to know — so it produces a **consent-gated resemblance reading that can request review but can never assert infringement**.

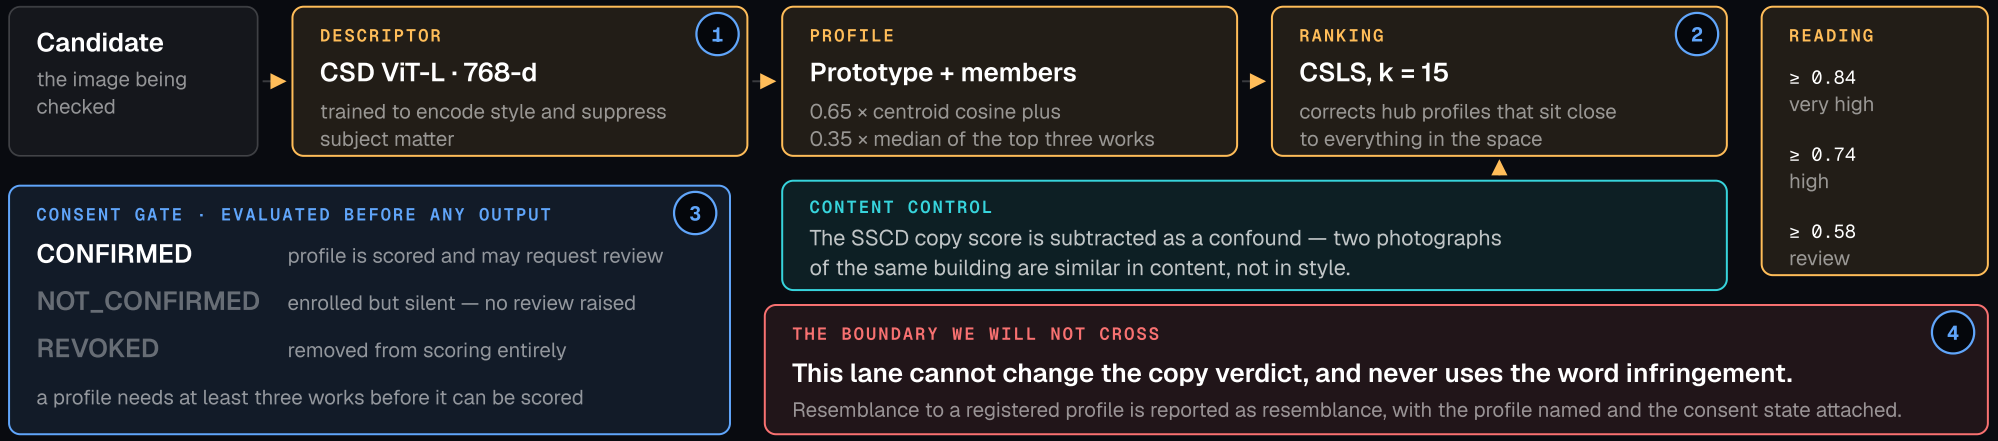


A6 · Consent is checked before scoring, not after. A creator who has not opted in is not scored against.

1. **Style, not subject.** CSD descriptors are trained specifically to encode how something was made rather than what it depicts.
2. **Hub correction matters.** CSLS discounts profiles that sit near everything, which is the classic failure of raw cosine ranking on style vectors.
3. **Opt-in by construction.** A profile with unconfirmed or revoked consent produces no reading at all — the gate runs before the model, not after.
4. **A deliberate legal ceiling.** The most this lane can ever do is ask a human to look, which keeps the product on the right side of a genuinely unsettled area of law.


SAY THIS

Style is not protected by copyright anywhere, and we did not build a product that pretends otherwise. What we built is a way for a creator who opted in to find out that something closely resembling their work is circulating — and then decide for themselves what to do.

# A7 The firewall between detection and decision

THE MOST IMPORTANT DESIGN CHOICE

Models never decide anything. They produce evidence; a **separately versioned policy document** turns evidence into an action. That separation is why a model upgrade cannot silently change what a customer's pipeline blocks.

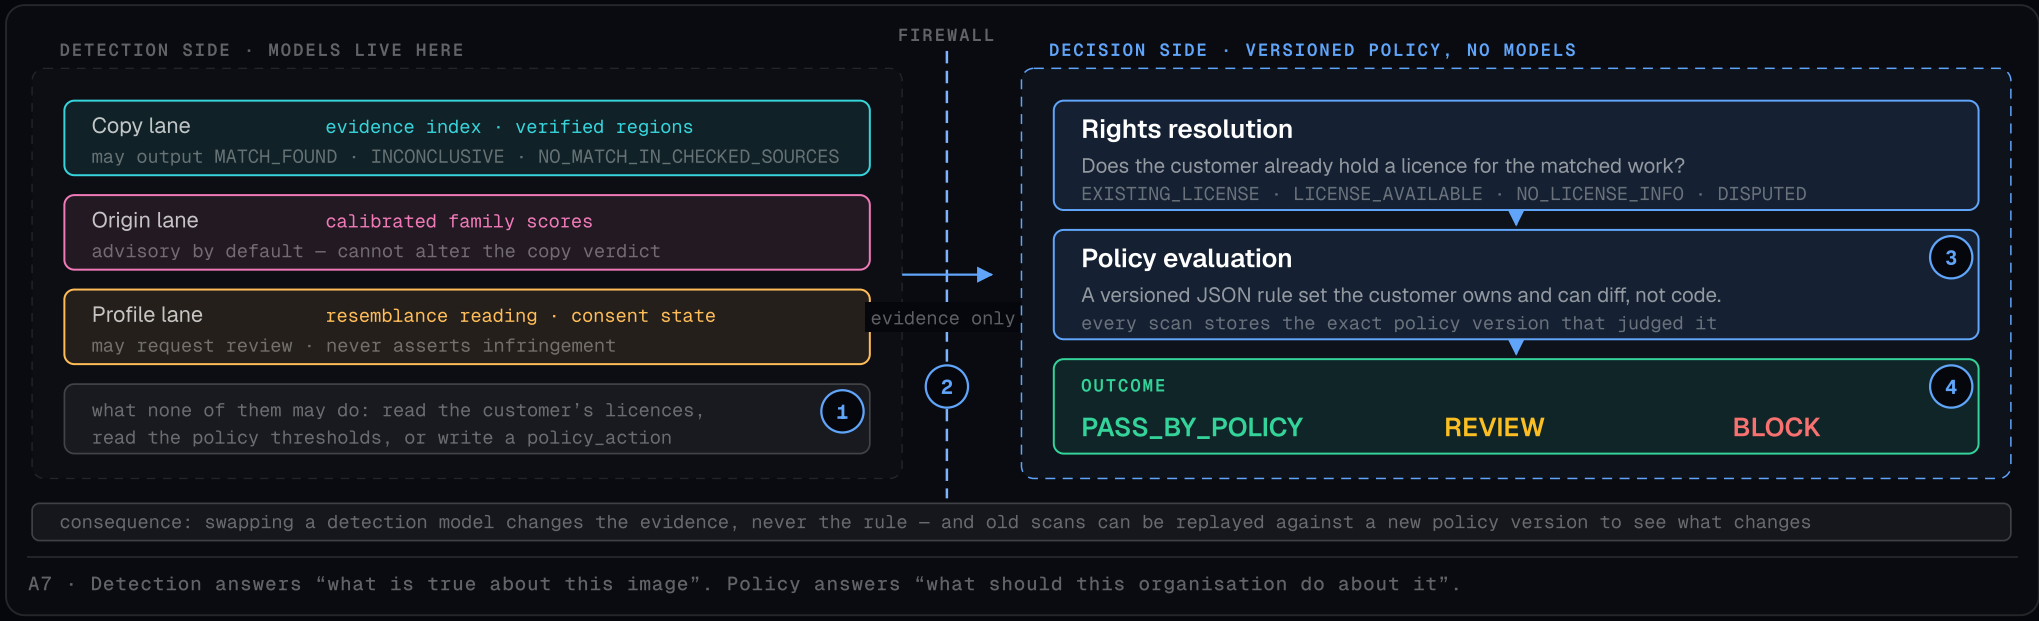


A7 · Detection answers "what is true about this image". Policy answers "what should this organisation do about it".

1. **Models are blind to consequences.** No model can see a licence or a threshold, so no model can be tuned into a business outcome.
2. **Only evidence crosses.** The firewall carries findings and coverage — never a suggested action.
3. **Policy is a document.** It is versioned JSON the customer owns, so a compliance officer can read and diff it without reading Python.
4. **Two systems, two audits.** "Was the detection correct?" and "was the rule correct?" become separate questions with separate answers.

**SAY THIS**

This is the line most products get wrong. They tune the model until it blocks the right things, which means every model update silently rewrites the company's policy.

Ours cannot, because the model has never been allowed to see the policy.

**IF THEY PUSH BACK**

*"Isn't that just extra layers?"* It is the difference between a defensible and an indefensible audit. When a regulator asks why an image was blocked, we point at a policy version with a date; when they ask whether the evidence was sound, we point at the packet. Fusing them makes both questions unanswerable.

*"Who sets the thresholds?"* The customer, per workspace. A news wire and an advertising agency need genuinely different lines, and neither should have to ask us to retrain something.

# A8 Coverage — the difference between “clean” and “unchecked”

HONEST FAILURE

A system that returns “no match” when it never actually searched is worse than no system, because it manufactures false confidence. **Every scan reports what it was able to examine**, and an incomplete search is a distinct outcome with its own name.

OUTCOME A ①

**We looked, and found nothing.**

NO_MATCH_IN_CHECKED_SOURCES

Coverage COMPLETE. Every declared work was embedded, searched and verified.

OUTCOME B ②

**We could not look properly.**

SCOPE_INCOMPLETE

Coverage PARTIAL, DEGRADED or TRUNCATED — with the reason attached.

OUTCOME C ③

**Nobody declared anything.**

EMPTY_SCOPE

The catalogue is empty, so a clean result would be meaningless.

NAMED REASONS, RECORDED PER SCAN — NEVER A GENERIC ERROR STRING ④

DECLARED_CATALOG_EMPTY · REQUIRED_LEARNED_RETRIEVAL_INCOMPLETE · CANDIDATE_VERIFICATION_TRUNCATED · CANDIDATE_VERIFICATION_FAILURE

and per capability: NOT_CONFIGURED · READY · EXECUTED · SKIPPED_BY_POLICY · UNAVAILABLE · FAILED

WHY THIS IS A COMPETITIVE ADVANTAGE, NOT A CAVEAT

A buyer’s legal team can only rely on a clean result if the system is capable of telling them when it is not. Silent degradation is what makes every other tool unusable as evidence.

A8 · Three outcomes that every other product collapses into one green tick.

① **A clean result is a claim.** It asserts that the declared catalogue was fully searched, and that assertion is checkable.

② **Degradation is visible.** If one reference image failed to embed, coverage drops and the scan says so rather than quietly skipping it.

③ **Empty is not clean.** Scanning against nothing returns a distinct state, so an unconfigured workspace cannot look like a passing one.

④ **Per-capability truth.** Each model records whether it ran, was skipped, or was unavailable, which is what makes the packet auditable later.


SAY THIS

Ask any competing tool what happens when its detector times out. It returns a pass. Ours returns SCOPE_INCOMPLETE with the reason code, because the only thing more dangerous than a wrong answer is a confident one.

# A9 Retrieval at scale

FROM ONE CATALOGUE TO TEN MILLION WORKS

The expensive part of this system is comparing an image against every work that could have been copied. We make that cheap with a **three-tier funnel**: exact identity first, then approximate vector recall, and only then the heavy geometric proof.

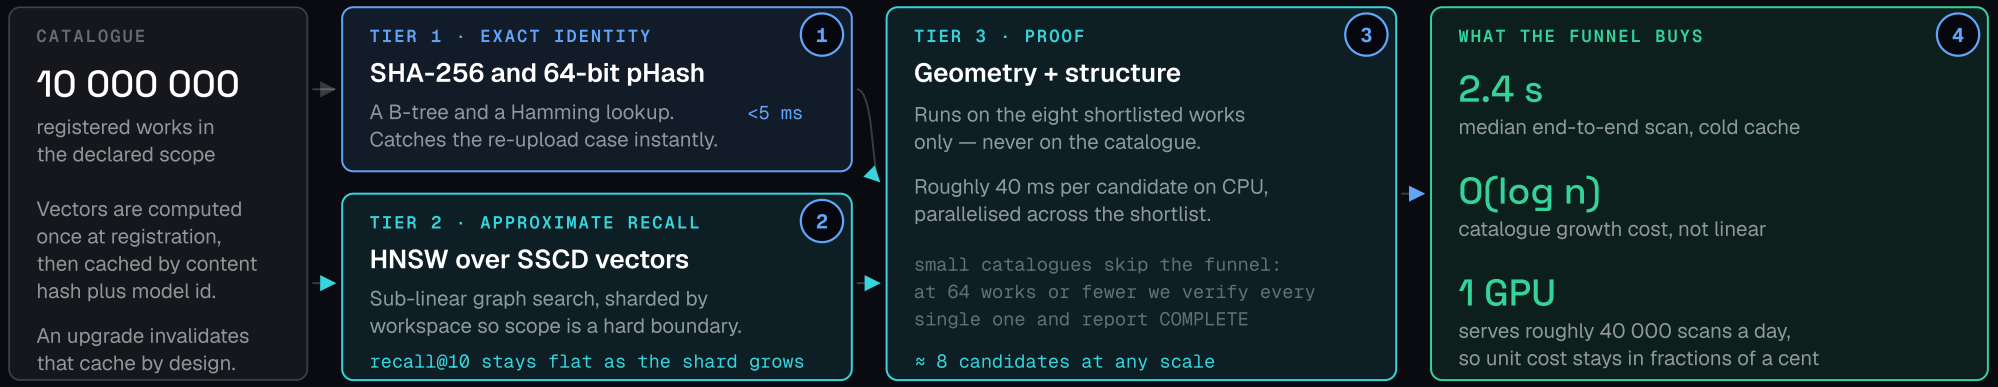


A9 · Cheap filters run on everything, expensive proof runs on almost nothing. That ratio is what makes the economics work.


1. **Identity before intelligence.** Most real reuse is an unmodified re-upload, and a hash lookup answers that in milliseconds.
2. **Recall is sub-linear.** A graph index means doubling the catalogue does not double the search time.
3. **The expensive stage is bounded.** Geometry always runs on about eight images, so the slowest part of the pipeline has constant cost.
4. **Cost per scan is flat.** That is what makes per-scan pricing viable rather than a bespoke enterprise deal every time.

SAY THIS

The naive version of this product compares one image against a million images and dies. We only ever run the expensive proof on about eight candidates, so the cost of a scan barely moves as the catalogue grows from a thousand works to ten million.

# Model Lab — how a model earns the right to run

No model reaches production because someone liked its demo. Each one climbs a **six-rung qualification ladder** with a written gate at every rung, and the exact bundle of versions that judged a scan is recorded inside that scan.

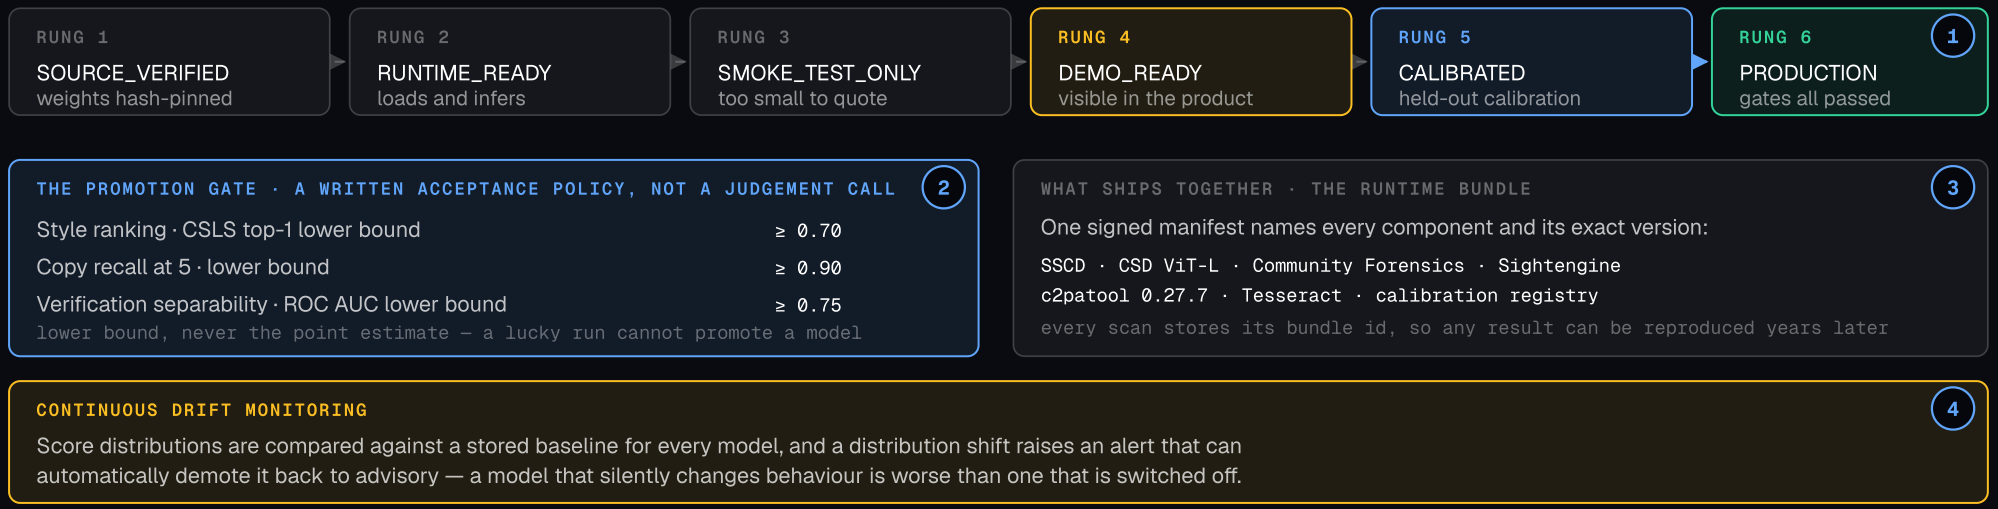


1. **Most models never reach the top.** A model can be useful at rung four and still be barred from influencing a decision.
2. **Gates use confidence bounds.** We promote on the lower bound of a Wilson interval, so a small favourable sample cannot pass a model.
3. **Reproducibility is a stored field.** Given a scan id we can reconstruct the exact model set that produced it, which is what makes the evidence hold up.
4. **Demotion is automatic.** Drift against the baseline pulls a model back down the ladder without waiting for a human to notice.

**SAY THIS**

Every team here can show a model that works. The question is what happens on the four-hundredth day, when the weights have been swapped twice and someone disputes a result from last March. We can answer that, because the scan carries the bundle that judged it.

# A11 Evidence Microscope — showing the work

EXPLAINABILITY THE USER CAN ACT ON

The reviewer sees the actual evidence, not a bar chart of a score. **Six inspection modes, one per question**, each drawing on the same signed packet the API returned — so what is on screen and what is in the record cannot diverge.

START HERE
**Summary**
Plain-language verdict, coverage badge and the one action to take.

AI CHECK
**Origin**
Which detector families fired, their calibration state, C2PA findings.

WORK MATCH 1
**Copy**
Verified support regions outlined on both images, plus matching point pairs.

MATCH DETAIL
**Structure**
Post-alignment measures: SSIM, luminance and gradient agreement.

CREATOR
**Style**
Profile name, sample count, consent state and the factor breakdown.

CREATOR DETAIL 2
**Style map**
A 4 × 4 tile heat map showing which areas drive the resemblance.

HOW THE OVERLAYS ARE SPECIFIED 3

Coordinates are normalised to the 0–1 image space and travel inside the evidence packet itself, so the same outline renders identically in the web app, in a PDF export, and in a customer's own viewer.

A STRICT RULE 4

The microscope is downstream of everything.
It can never alter a verdict, only display one.

WHY THIS WINS THE ROOM

When a reviewer can point at the exact overlapping region and count the matching points, the conversation stops being about whether they trust the model.

A11 · Six modes, one packet. Everything on screen is a rendering of data that was signed and anchored.

1. **Evidence, not attribution heat.** We draw the geometrically verified correspondences, which are checkable, rather than a saliency blur that is not.
2. **Style gets its own view.** A tile map shows resemblance is diffuse across the frame, which is precisely why it is not a copy.
3. **Portable coordinates.** Normalised geometry means a customer can rebuild the same overlay in their own tooling from the packet alone.
4. **Read-only by design.** The UI has no path to modify a verdict, so what a reviewer sees is what was recorded.

SAY THIS

Explainability in most AI products means a percentage with a colour. Ours means the reviewer sees the two images aligned, the matched region outlined, and the specific points that line up — and can disagree with us on the evidence rather than on faith.

# A12 Responsible AI — the risks we designed against



A system that accuses people of copying has real failure costs. These are the five ways it could cause harm and the **structural control that makes each one hard to reach** — controls in the architecture, not promises in a policy document.

| RISK | WHAT IT WOULD LOOK LIKE | THE STRUCTURAL CONTROL |
|---|---|---|
| **False accusation of copying** | An embedding finds two visually similar but independent works and the system calls it a match. | A match is impossible without a validated homography and aligned structural agreement. Similarity alone is capped at `INCONCLUSIVE`, and both confirmations use unrelated mathematics. |
| **AI-detector false positives on human work** | A heavily edited photograph is labelled machine-generated and the photographer is penalised. | The origin lane is advisory by default and cannot change the copy verdict. Two independent, individually calibrated families must agree, and disagreement produces a named inconclusive state. |
| **Style policing** | An artist is blocked for painting in a genre that resembles someone with a profile on the platform. | Consent is checked before scoring; the lane can only request human review; the word infringement never appears in a style finding. A profile needs at least three works before it exists at all. |
| **Silent degradation** | A model is unavailable, the scan returns clean, and a customer publishes believing they were checked. | Coverage and per-capability execution state are mandatory fields on every scan. An unrun stage produces `SCOPE_INCOMPLETE`, never a pass. |
| **Creator data misuse** | Registered works or creator profiles leak, or are used to train something the creator never agreed to. | Works stay in the customer's own scope, enforced at the index and again by row-level security. Only 32-byte hashes ever reach the public chain, and nothing registered is used as training data. |

**SAY THIS**

Notice that none of these controls are "we will be careful". Each one is a place in the code where the harmful outcome is structurally unreachable — a match cannot exist without geometry, a style score cannot exist without consent.

**IF THEY PUSH BACK**

*"What about bias across cultures or art traditions?"* The copy lane is geometric, so it is invariant to subject matter by construction. The style lane is the one with real exposure, which is exactly why it is consent-gated, advisory only, and gated behind a per-profile minimum sample count.

*"Who is accountable when it is wrong?"* The customer's policy made the decision and the packet shows the evidence it was based on. Both are versioned and both are anchored, so an incorrect outcome is investigable rather than deniable.

# Measured performance

Every number below comes from a harness in the repository that a judge can run. The benchmark is built around **transformations an infringer actually applies** — crops, rotations, mirrors, re-encodes and overlays — not a clean academic split.

**98.1%**
of 364 transformed positives returned MATCH_FOUND

**99.45%**
returned match or review — only two cases missed outright

**0**
false matches across 115 negative pairs

**26**
distinct transformation families in the positive set

## WHAT THE POSITIVE SET CONTAINS

| TRANSFORMATION FAMILY | BEHAVIOUR |
|---|---|
| Crop, 60–95% of frame | Recovered by regional query views and absorbed by the homography. |
| Rotation, mirror, transpose | Mirror was a known miss at 0 of 14; the mirrored-descriptor retry now recovers 14 of 14. |
| JPEG re-encode, resize, blur | SSCD vectors move very little; geometry is unaffected. |
| Overlays, borders, colour shifts | Masked structural comparison ignores the added region rather than being dragged down by it. |
| Remaining failures | Two flat repetitive graphics with almost no distinctive keypoints — reported honestly as inconclusive rather than guessed. |

## HOW THE NUMBERS ARE COMPUTED

- **Wilson intervals, not point estimates.** Every rate is reported with a confidence interval, and promotion gates read the lower bound.
- **Lineage-clustered bootstrap.** Twenty-six transformations of one source image are not twenty-six independent samples, so resampling happens at the source-work level.
- **Negatives are hard.** The negative set is visually similar but independent work, which is the case that actually breaks embedding-only systems.
- **Scores are labelled non-probabilistic.** The evidence index is an ordering, and the packet says so explicitly rather than dressing it up as a percentage.


**SAY THIS**

The number I care about is the zero. Recall can be bought by lowering a threshold; zero false matches on hard negatives is what makes the output usable by a legal team.

# A14 Where the AI output becomes evidence

HAND-OFF TO THE PROOF LAYER

An AI verdict that can be regenerated differently tomorrow is an opinion. **We make the output deterministic, sign it, and anchor its hash publicly** — which is what converts a model result into something a court can date.

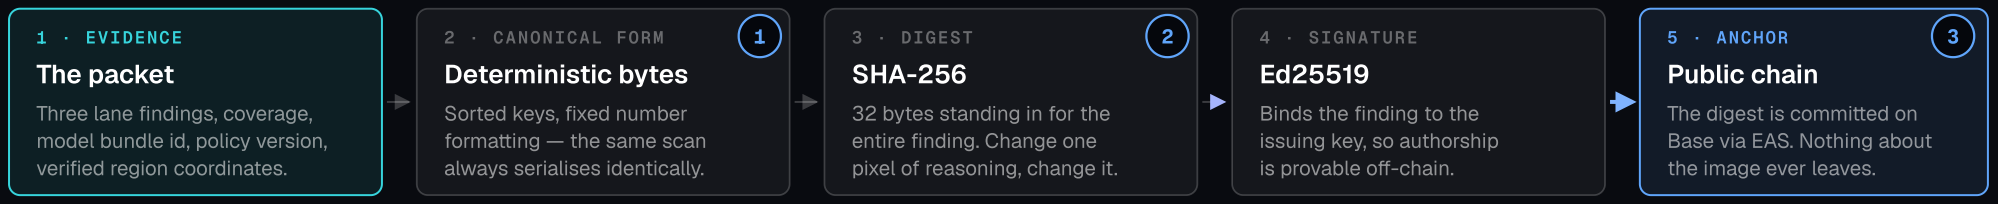


**WHY DETERMINISM IS AN AI REQUIREMENT, NOT A BLOCKCHAIN ONE** (4)

A model that returns a slightly different phrasing or ordering on a re-run cannot be hashed, cannot be signed, and therefore cannot be evidence. Every choice in this pack — fixed enums instead of free text, an evidence index instead of a generated sentence — exists so the output is byte-stable.

**THE PAIR OF DOCUMENTS**

This is the seam between the two packs. The AI side produces a deterministic finding; the blockchain side makes it undeniable. Sheet B3 continues here.

A14 · The AI pipeline is designed backwards from this requirement: the output must be byte-identical on a re-run.

1. **Fixed vocabulary, not prose.** Enums and numbers serialise identically every time; a generated sentence does not.
2. **The digest covers the reasoning.** Model versions and policy version are inside the hashed packet, so nobody can later claim a different configuration was used.
3. **Only 32 bytes go public.** The image, the catalogue and the customer's identity never cross the boundary.
4. **Determinism is the constraint that shaped the AI.** It is why we did not build this on a large multimodal model that writes an explanation.

**SAY THIS**

This is why the two submissions are one system. The AI decides what is true about the image; the chain makes it impossible for anyone — including us — to change that answer afterwards.

# A15 Q&A armory — the hard technical questions



Each answer is two or three sentences, followed by the sheet to turn to. Answer, then point — do not read the sheet aloud.

QUESTION 01

### Why not just use one large multimodal model?

Because the output has to be byte-identical on a re-run, or it cannot be hashed, signed or anchored. A general model writes a plausible sentence that changes between runs, which is interesting but is not evidence.

Turn to **A14** · the determinism panel

QUESTION 02

### AI detectors are famously unreliable. Why trust yours?

We do not, and the architecture says so. Origin detection is the weakest tier of a three-tier ladder, requires two independently calibrated model families to agree, and is advisory by default — it cannot block anything on its own.

Turn to **A5** · the ladder, bottom tier

QUESTION 03

### Isn't this reverse image search with extra steps?

Reverse search finds similar pictures on the open web and stops there. We search a declared rights-bearing catalogue, then geometrically prove which region of which work was reused, and return the matching point pairs as evidence.

Turn to **A4** · steps two and three

QUESTION 04

### These are all off-the-shelf models. Where is the novelty?

The novelty is not a new backbone, it is the evidence contract around them: three separated lanes, mandatory coverage reporting, a firewall between detection and policy, and a deterministic packet that can be anchored. Nobody else outputs something a lawyer can use.

Turn to **A7** · then **A8**

QUESTION 05

### What stops an adversarial image fooling you?

An adversarial perturbation can push an embedding around, so at worst it gets a work into or out of an eight-item shortlist. It cannot fabricate twelve geometrically consistent keypoint correspondences with an image it never copied.

Turn to **A4** · callout two

QUESTION 06

### What did you train, and on whose data?

We train no backbone on customer material — registered works are never training data. What we fit is calibration: a two-parameter mapping learned on held-out labelled data, plus per-profile prototypes built only from works a creator consented to enrol.

Turn to **A10** · rung five, and **A6** · the consent gate

QUESTION 07

### What is the latency, and can it run in a real workflow?

The API accepts in under a fifth of a second and the full scan completes in about two and a half seconds, because the heavy geometry only ever runs on eight candidates regardless of catalogue size.

Turn to **A9** · the funnel, then **A2**

QUESTION 08

### What happens when a new generator appears next month?

A new detector is added as an additional evidence family and enters at the bottom of the qualification ladder; it cannot influence a result until it is calibrated and passes the written gate. Meanwhile the copy and profile lanes are entirely unaffected.

Turn to **A10** · the ladder and the gate

# A16 Q&A armory — risk, ethics and business



If a question is not here, answer it with the same shape: name the risk, then point to where in the architecture it is made unreachable.

QUESTION 09

### Detecting artistic style is legally dangerous. Aren't you exposed?

Style is not copyrightable and we never claim it is. The lane is opt-in per creator, produces a resemblance reading rather than a finding, and its maximum possible effect is to ask a human to take a look.

Turn to **A6** · the boundary panel

QUESTION 10

### Prove the accuracy. Numbers, not adjectives.

Three hundred and sixty-four positives across twenty-six real transformation families: 98.1% returned a match, 99.45% returned match or review, and zero of one hundred and fifteen hard negatives produced a false match.

Turn to **A13** · the four figures across the top

QUESTION 11

### What if the model is wrong and someone is falsely accused?

A match requires two independent confirmations using unrelated mathematics, and even then the system only ever produces evidence — the customer's own policy decides the action. Every claim comes with the region outlined so it can be disputed on the evidence.

Turn to **A12** · row one, then **A11**

QUESTION 12

### Why does an AI product need blockchain at all?

Because the value of a pre-publication check is the date on it, and we are the party being paid to produce that date. Anchoring the finding's hash means our customer's defence does not depend on trusting us.

Turn to **A14** · then the blockchain pack, **B1**

QUESTION 13

### How do you avoid bias against particular art traditions?

The copy lane is geometric, so it is invariant to subject and culture by construction. The style lane is the one with genuine exposure, which is why it is consent-gated, advisory only, and requires a minimum sample count before a profile can be scored.

Turn to **A12** · row three

QUESTION 14

### Do you keep customer images? What about privacy?

Media stays inside the customer's own scope, enforced at the retrieval index and again by row-level security in the database. Only a 32-byte hash is ever published, so nothing about the image or the customer crosses the public boundary.

Turn to **A9** · the footer, and **A14** · step five

QUESTION 15

### Couldn't Adobe or Google ship this next quarter?

They can ship detection; they cannot ship neutrality. A platform that also hosts the content benefits from the answer, and a finding only counts if its author does not.

Turn to **A7** · the firewall, then **B2**

QUESTION 16

### Who actually pays for this, and why?

Agencies, publishers and marketplaces absorbing takedown risk today with no record of having checked. They are buying a dated, signed record of diligence, not detection.

Turn to **A1** · then **A14**

CLOSING LINE FOR THE SESSION

Most teams built a detector. We built the system a detector is one component of: it records what it checked, what it could not, who decided and when — then makes all four impossible to quietly revise.