


patient (patient-id , pname , disease)
 test (test-id , patient-id , time , data , result , doctor-id)
 doctor (doctor-id , dname , department , major)

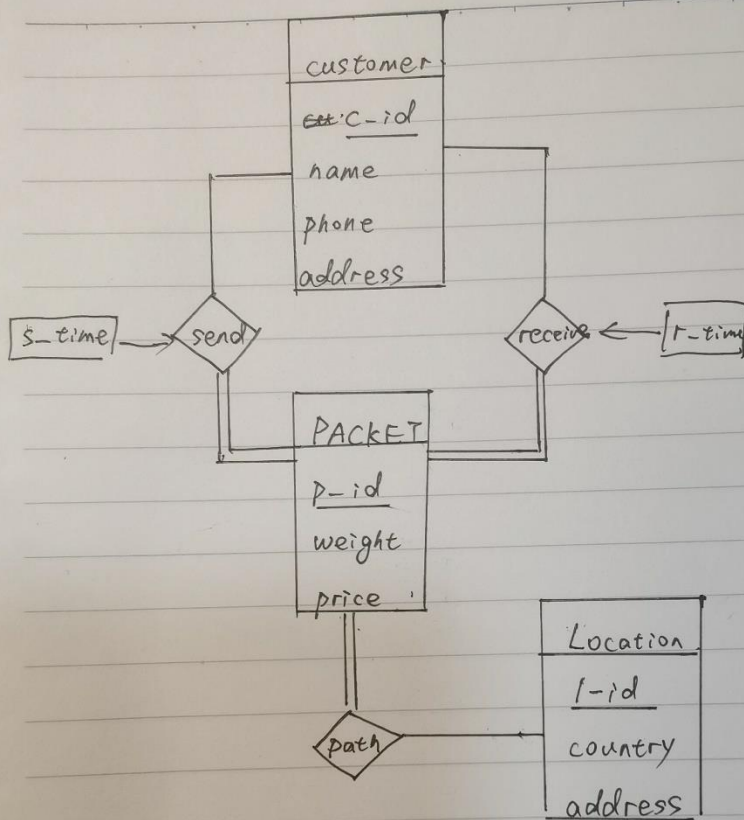

customer (c-id , name, phone, address)

packet (p-id , weight, price)

Location (l-id , country, address)

send (c-id , p-id , s-time

foreign key c-id references customer.

foreign key p-id references packet)

receive (c-id , p-id , r-time

foreign key c-id references customer.

foreign key p-id references packet)

path (p-id , l-id ,

foreign key p-id references packet

foreign key l-id references location)