

CS35L – Fall 2018

Slide set:	3.1
Slide topics:	Diff, modifying programs
Assignment:	3

How to Install Software

- Windows
 - Installshield
 - Microsoft/Windows Installer
- OS X
 - Drag and drop from .dmg mount -> Applications folder
- Linux
 - rpm(Redhat Package Management)
 - RedHat Linux (.rpm)
 - apt-get(Advanced Package Tool)
 - Debian Linux, Ubuntu Linux (.deb)
 - **Good old build process**
 - **configure, make, make install**


Decompressing Files

- Generally, you receive Linux software in the tarball format (.tgz) or (.gz)

Decompress file in current directory:

- `$ tar -xzf filename.tar.gz`
 - Option `-x`: `--extract`
 - Option `-z`: `--gzip`
 - Option `-v`: `--verbose`
 - Option `-f`: `--file`

Compilation Process

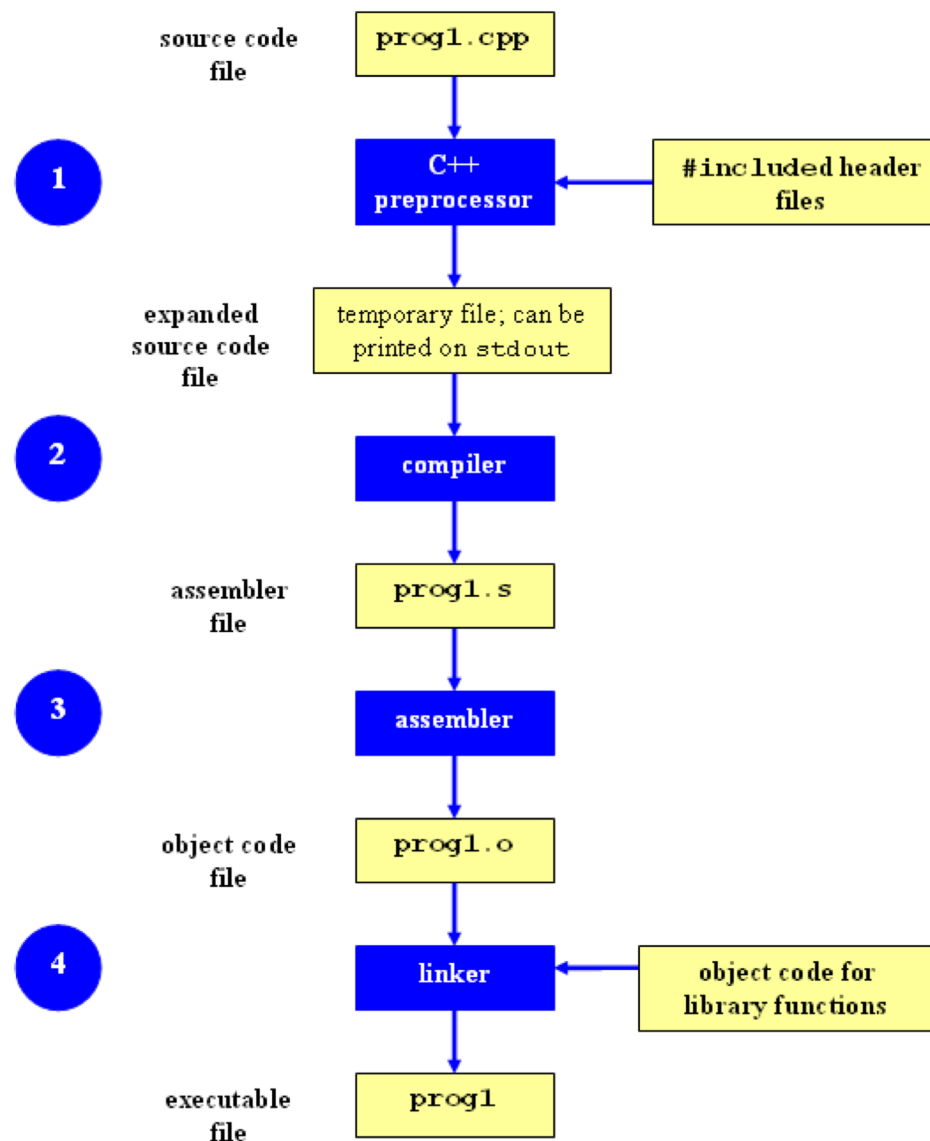

Command-Line Compilation

- shop.cpp
 - #includes shoppingList.h and item.h
- shoppingList.cpp
 - #includes shoppingList.h
- item.cpp
 - #includes item.h
- How to compile?
 - **g++ -Wall shoppingList.cpp item.cpp shop.cpp -o shop**

What if...

- **We change one of the header or source files?**
 - Rerun command to generate new executable
- **We only made a small change to item.cpp?**
 - not efficient to recompile shoppinglist.cpp and shop.cpp
 - Solution: avoid waste by producing a separate object code file for each source file
 - `g++ -Wall -c item.cpp...` (for each source file)
 - `g++ item.o shoppingList.o shop.o -o shop` (combine)
 - Less work for compiler, saves time but more commands

What if...

- **We change item.h?**
 - Need to recompile every source file that includes it & every source file that includes a header that includes it. Here: item.cpp and shop.cpp
 - Difficult to keep track of files when project is large
 - Windows 7 ~40 million lines of code
 - Google ~2 billion lines of code

=> Make

Make

- Utility for managing large software projects
- Compiles files and keeps them up-to-date
- Efficient Compilation (only files that need to be recompiled)

Makefile Example

Makefile - A Basic Example

all : shop #usually first

shop : item.o shoppingList.o shop.o

g++ -g -Wall -o shop item.o shoppingList.o shop.o

item.o : item.cpp item.h

g++ -g -Wall -c item.cpp

shoppingList.o : shoppingList.cpp shoppingList.h

g++ -g -Wall -c shoppingList.cpp

shop.o : shop.cpp item.h shoppingList.h

g++ -g -Wall -c shop.cpp

clean :

rm -f item.o shoppingList.o shop.o shop

} Rule

■ Comments
■ Targets
■ Prerequisites
■ Commands

} Dependency Line

Build Process

- **configure**
 - Script that checks details about the machine before installation
 - Dependency between packages
 - Creates 'Makefile'
- **make**
 - Requires 'Makefile' to run
 - Compiles all the program code and creates executables in current temporary directory
- **make install**
 - make utility searches for a label named install within the Makefile, and executes only that section of it
 - executables are copied into the final directories (system directories)

Lab 3

- Coreutils 8.29 has a problem
 - `$ la -A` is equivalent to `ls -a -A`
 - if the current directory has two files named `.foo` and `bar`, the command `la -A` outputs four lines, one each for `.`, `..`, `.foo`, and `bar`.
 - These users want `la -A` to output just two lines instead, one for `.foo` and one for `bar`
- Why?
 - the `-a` option always overrides the `-A` option regardless of which option is given first
- Want the flag that comes later to take effect
- Fix the `ls` program

Getting Set Up (Step 1)

- Download coreutils-8.29 to your home directory
 - Use 'wget'
- Untar and Unzip it
 - tar -xJvf coreutils-8.29.tar.xz
- Make a directory ~/coreutilsInstall in your home directory (this is where you'll be installing coreutils)
 - mkdir ~/coreutilsInstall

Building coreutils (Step 2)

- Go into coreutils-8.29 directory. This is what you just unzipped.
- Read the INSTALL file on how to configure “make”, especially **--prefix** flag
- Run the configure script using the prefix flag so that when everything is done, coreutils will be installed in the directory ~/coreutilsInstall
- Compile it: make
- Install it: make install (won't work on Linux server without proper prefix!)
 - Why?

Reproduce Bug (Step 3)

- Reproduce the bug by running the version of 'ls -a -A ' in coreutils 8.29
- If you just type \$ ls at CLI it won't run 'ls' in coreutils 8.29
 - Why? Shell looks for /bin/ls
 - To use coreutils 8.29: \$./ls
 - This manually runs the executable in this directory

Patching

- A patch is a piece of software designed to fix problems with or update a computer program
- It's a diff file that includes the changes made to a file
- A person who has the original (buggy) file can use the patch command with the diff file to add the changes to their original file

Applying a Patch

Source Files



Original File

Modified File



Patch File



Original File



Patch File



Modified File

diff Unified Format

- `diff -u original_file modified_file`
- `--- path/to/original_file`
- `+++ path/to/modified_file`
- `@@ -l,s +l,s @@`
 - `@@`: beginning of a hunk
 - `l`: beginning line number
 - `s`: number of lines the change hunk applies to for each file
 - A line with a:
 - `-` sign was deleted from the original
 - `+` sign was added to the original
 - stayed the same

Patching and Building (Steps 4 & 5)

- `cd coreutils-8.29`
- `vim` or `emacs` `patch_file`: copy and paste the patch content
- `patch -pnum < patch_file`
 - `'man patch'` to find out what **pnum** does and how to use it
- `cd` into the `coreutils-8.29` directory and type `make` to rebuild patched `ls.c`.
 - Don't install!!

Testing Fix (Step 6)

- Test the following:
 - Modified ls works
 - Installed unmodified ls does NOT work
- Test on:
 - Empty directory
 - Directory containing a hidden file
 - With just `-a`, with just `-A`
 - With `-aA`
 - With `-Aa`
- Answer Q1 and Q2