# Lab - System Utilities

## Introduction

In this lab, you will use Windows utilities to configure operating system settings.

## Recommended Equipment

- A computer running Windows


## Instructions


## Part 1: Custom Management Console

### Step 1: Explore the management console.


a. To open the Microsoft Management Console, click **Start**, and search for **mmc**. Click **Yes** to allow Microsoft Management Console to make changes to the computer.

© 2015 - 2019 Cisco and/or its affiliates. All rights reserved.

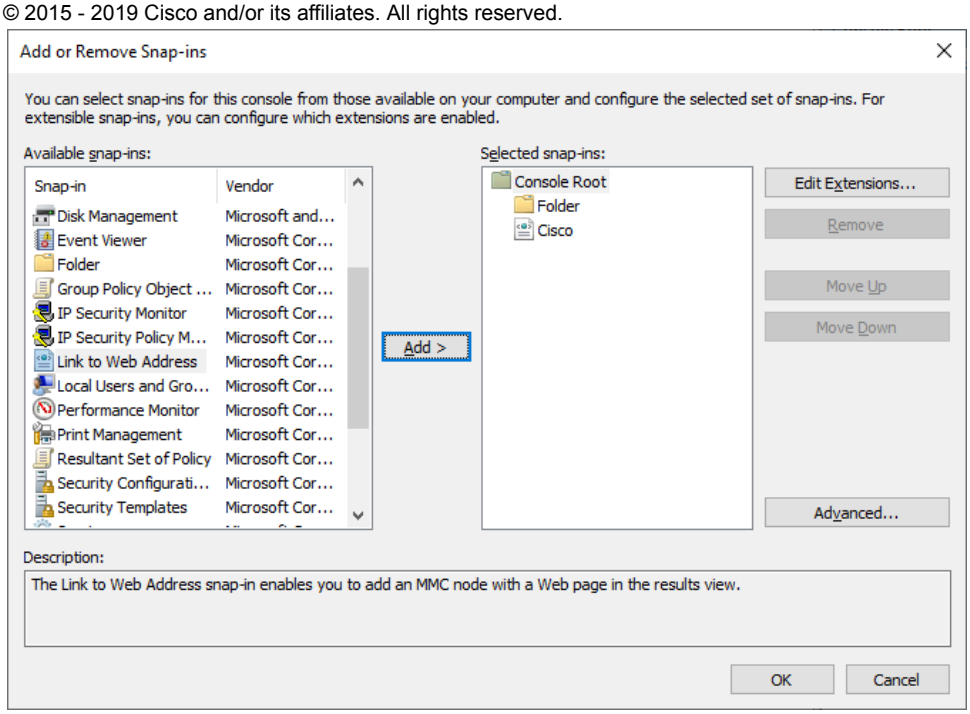

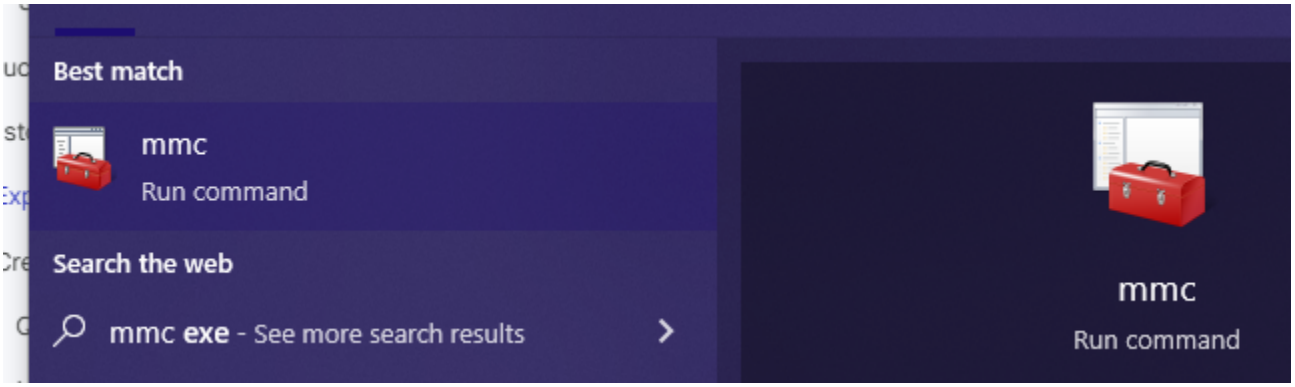



b. In the **Console1 - [Console Root]** window, you can build a custom console. Click **File > Add/Remove Snap-in**.

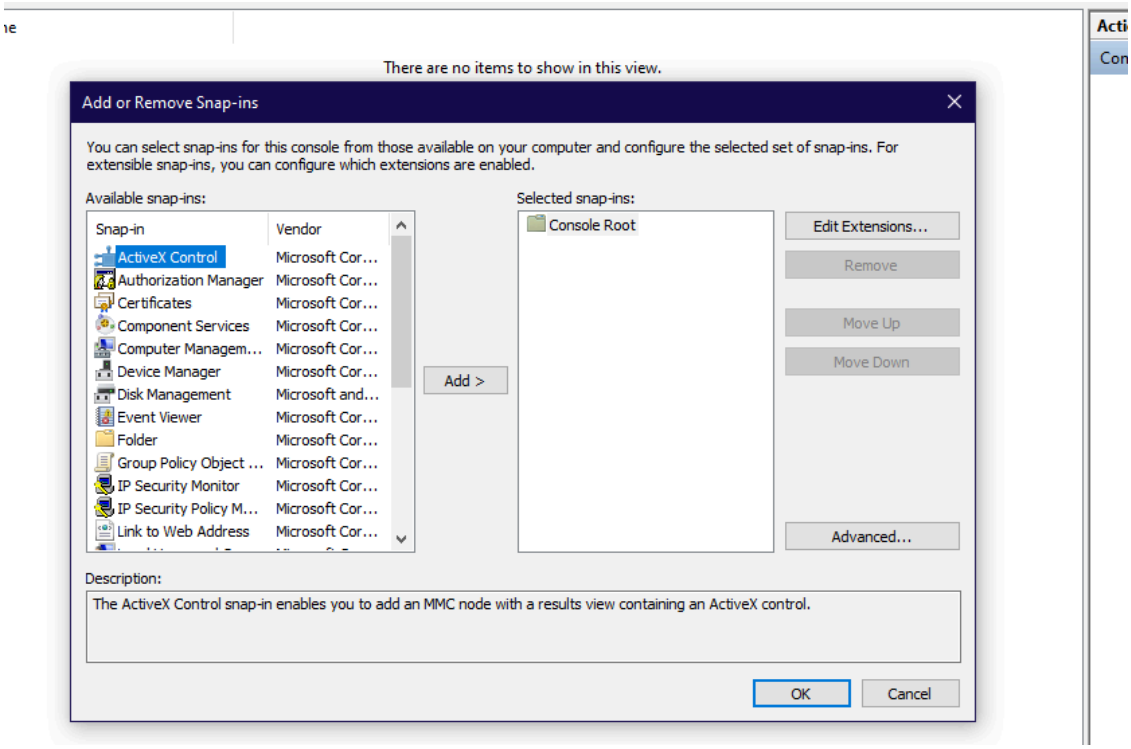



© 2015 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

www.netacad.com

c. In the **Add or Remove Snap-ins** window, you can add a folder snap-in. Scroll down the Available snap-ins: pane to locate the **Folder** snap-in. Select **Folder** and click **Add>**.

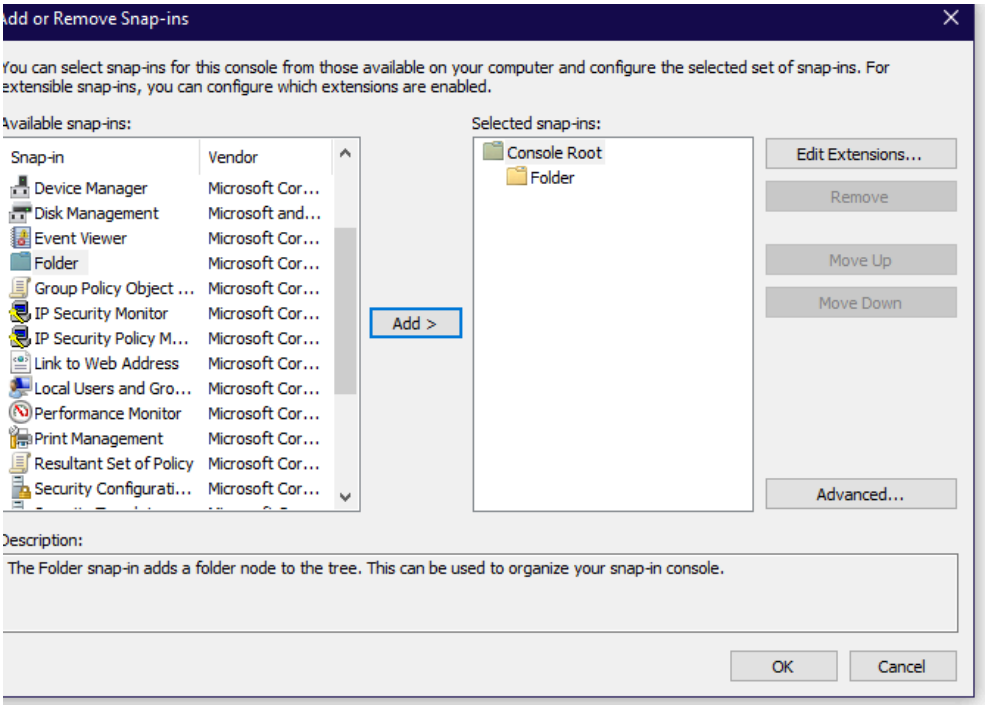



d. To add the **Link to Web Address** snap-in, scroll down the Available snap-ins: pane and select **Link to Web Address**. Click **Add>**. In the **Link to Web Address** wizard window, enter http://www.cisco.com in the **Path or URL:** field, click **Next>** to continue.

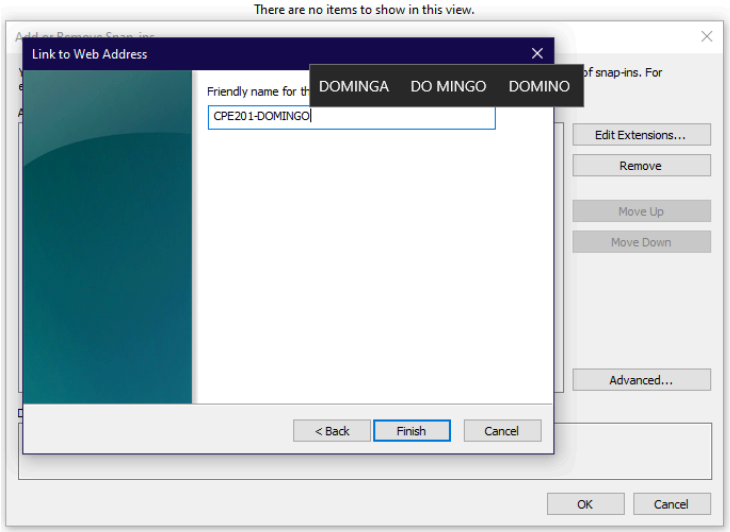


© 2015 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

e. In the Friendly name for the Link to Web Address snap-in box, enter Cisco and click Finish to continue.

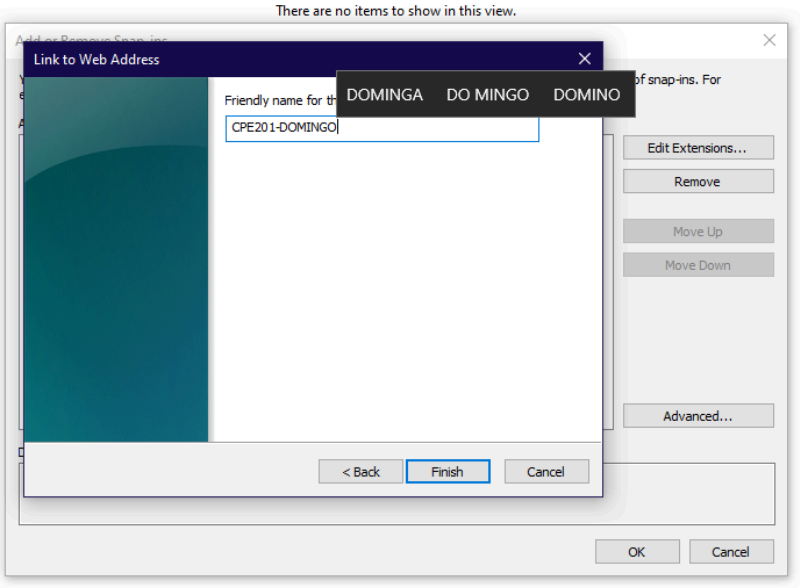



## Step 2: Create a custom management console.

a. To add snap-ins to the folder snap-in, click **Advanced**.

b. The Advanced window opens. Select Allow changing the parent snap-in. Click OK.

c. A drop-down menu appears for **Parent snap-in**. In the **Parent snap-in** box, select **Folder**.

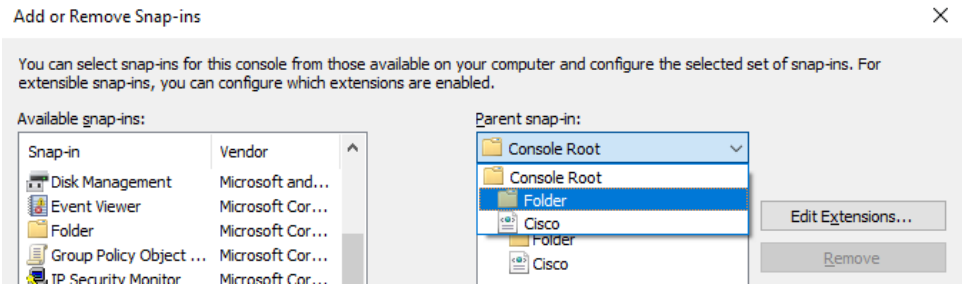



d. Add the following snap-ins from the Available snap-in: pane: **Computer Management**, **Device Manager**, and **Disk Management**. In each of the snap-in windows, click **Finish** to select to use the snap-in to manage the Local Computer or This computer.


e. Click **OK** to continue to exit the Add or Remove Snap-ins window.

© 2015 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

www.netacad.com

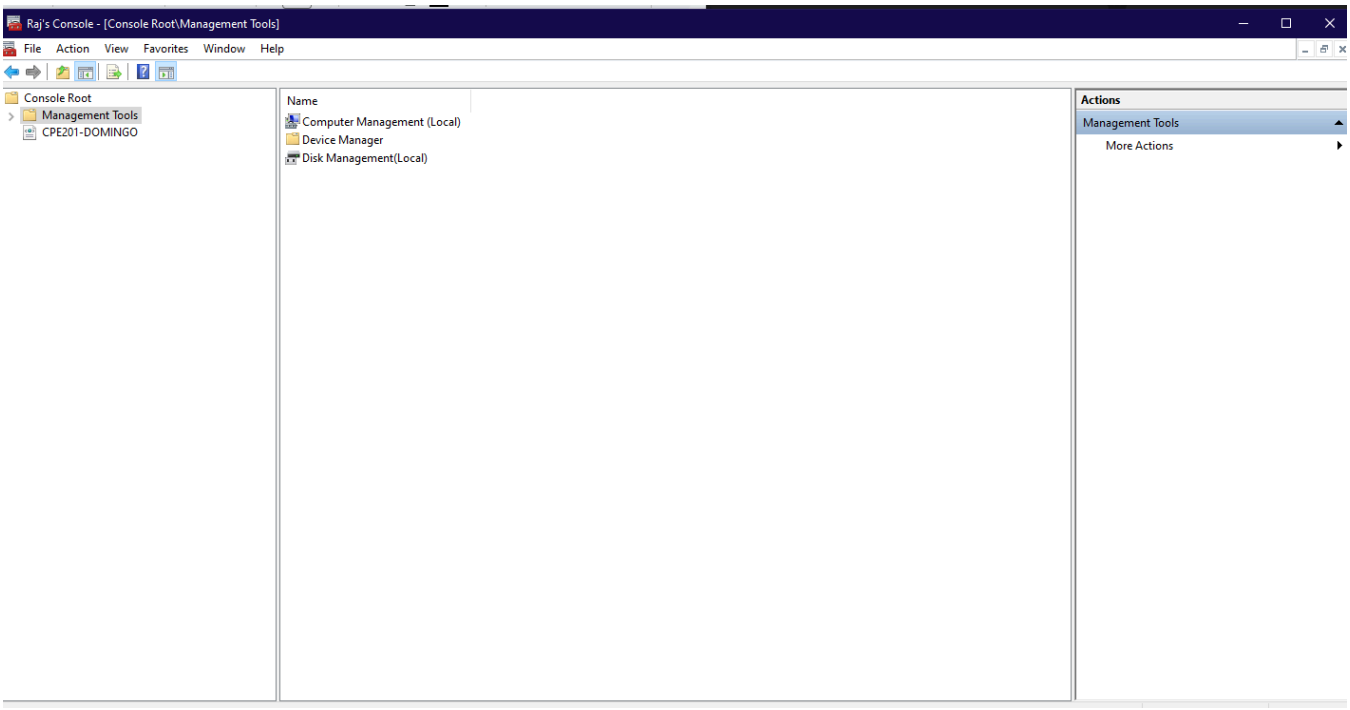


f. In the **Console1** window, right-click the **Folder** icon and select **Rename**. Change the name of the folder to **Management Tools**.

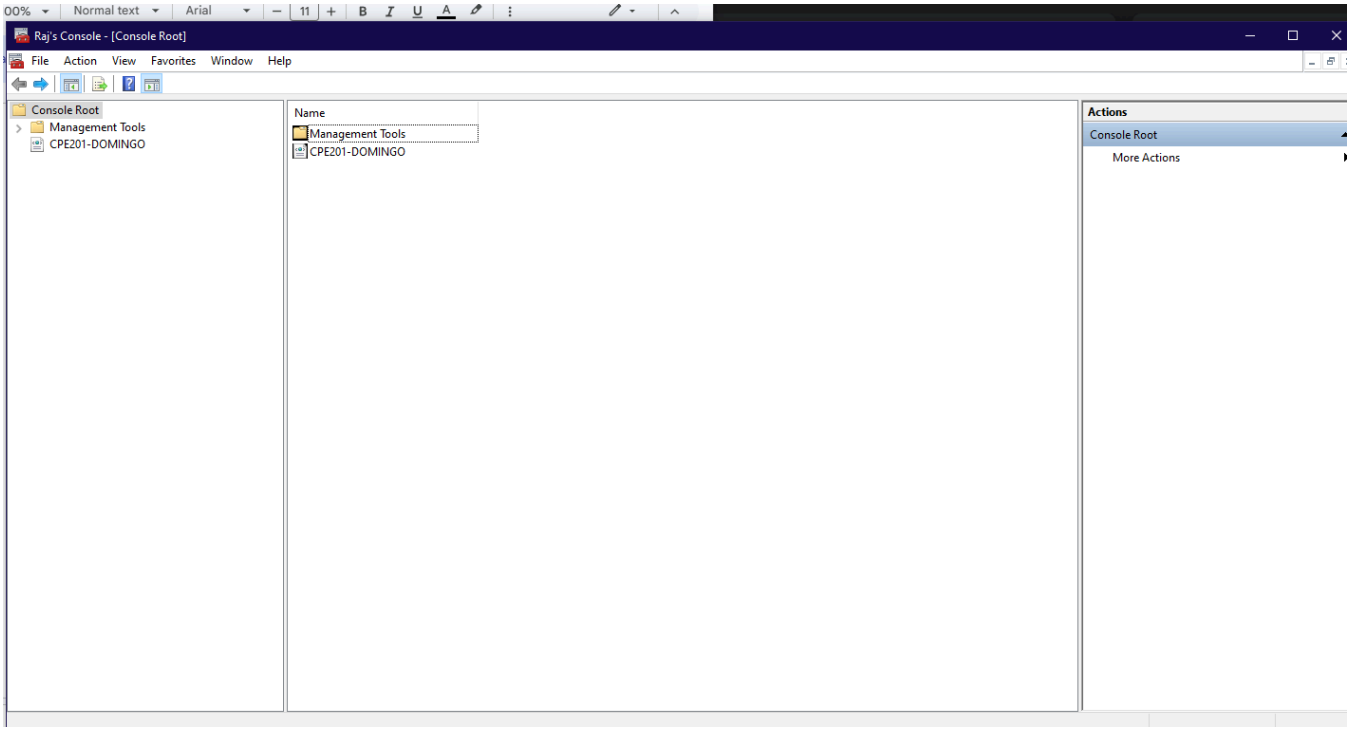


g. To save the custom console, click **File > Save As**. Change the file name to your name. Example: **John's Console**. Change the **Save in** box to **Desktop**. Click **Save**.

© 2015 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

www.netacad.com

h. Close all open windows.

i. On the desktop, double-click the **Console** icon that contains your name to re-open the console with your snap-ins. Click **Yes** to allow this application to make changes to your device as necessary.


j. Review the **Management Tools** folder by double-clicking on the tools.

k. Within your custom console, navigate to the Event Viewer.

Question:

What was the path you use to navigate to the Event Viewer?

***Computer Management (Local) → System Tools → Event Viewer***

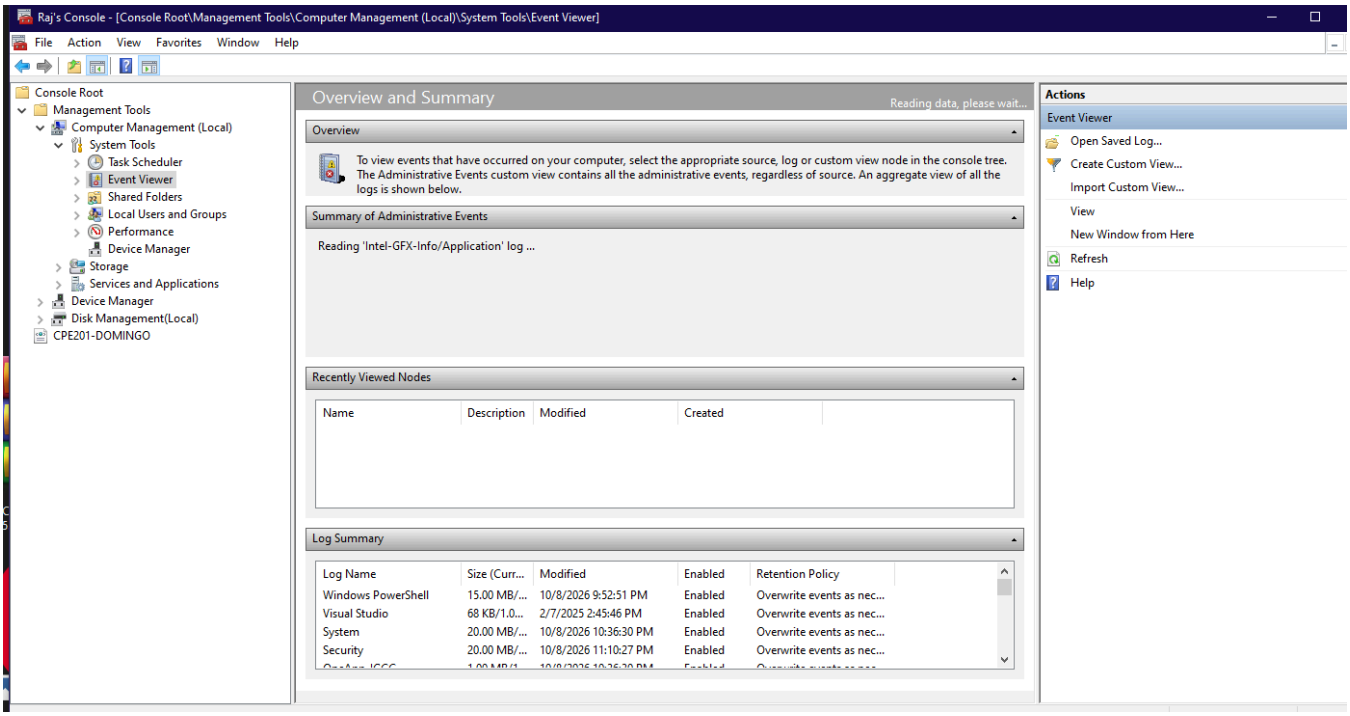


l. Close the **Console** window when you finish your review. Click **No** when prompted to save the changes.

# Part 2: Registry Editor

## Step 1: Change your desktop background settings.


a. Right-click the Desktop > select **Personalize**.

Question:


What is the background picture?

***It is a picture of a tori gate, backgrounds are set to picture.***

© 2015 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

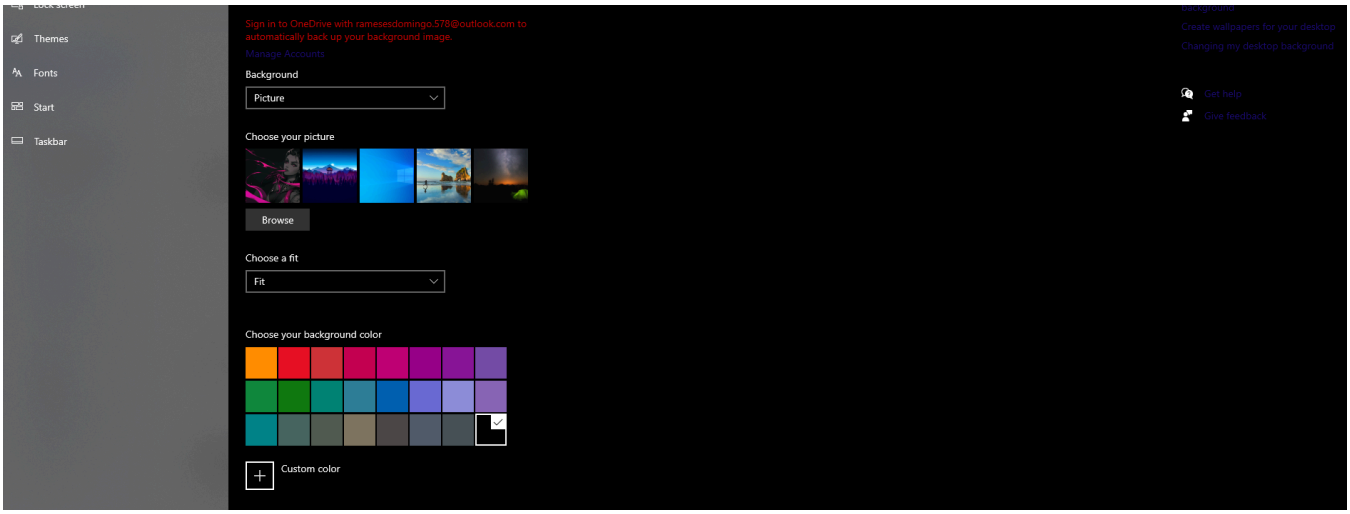



b. In Windows 10, select **Solid color** in the Background drop-down list. Choose a **blue** background color.

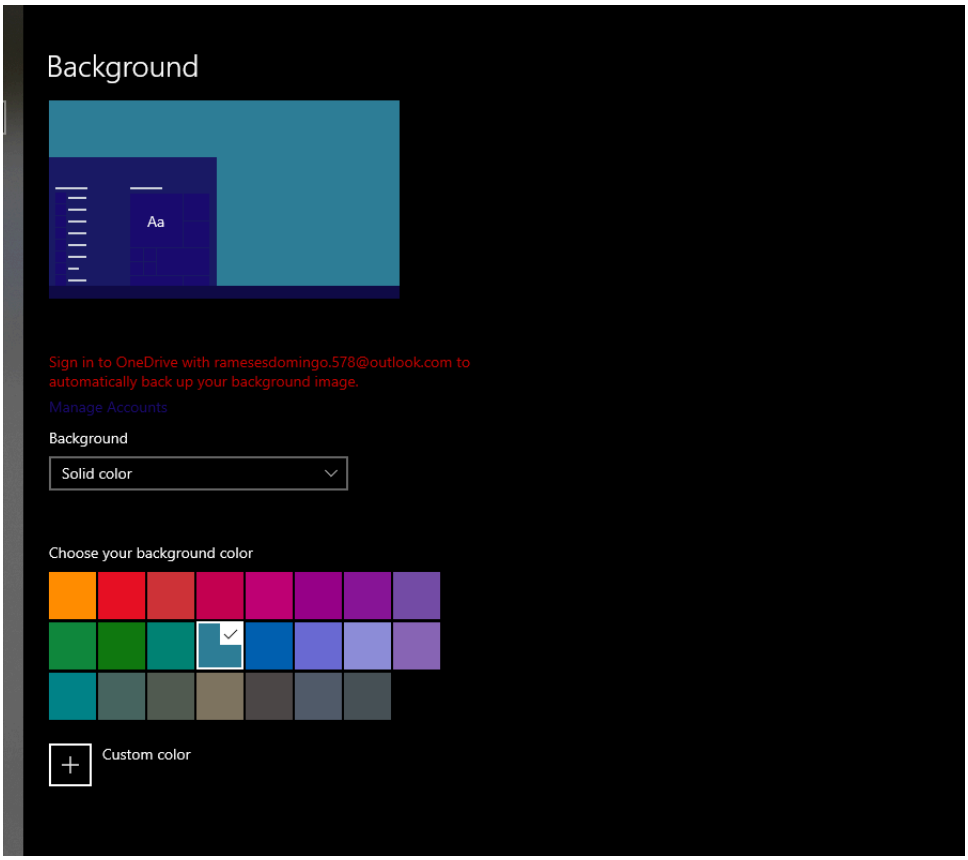


In Windows 8.1 and 7, click **Desktop Background**. Select **Solid Colors** in the Picture Location drop-down list. Choose a **blue** background color.

c. Click **Save changes**. The computer screen should now have a blue background. If not, ask the instructor for assistance.

© 2015 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

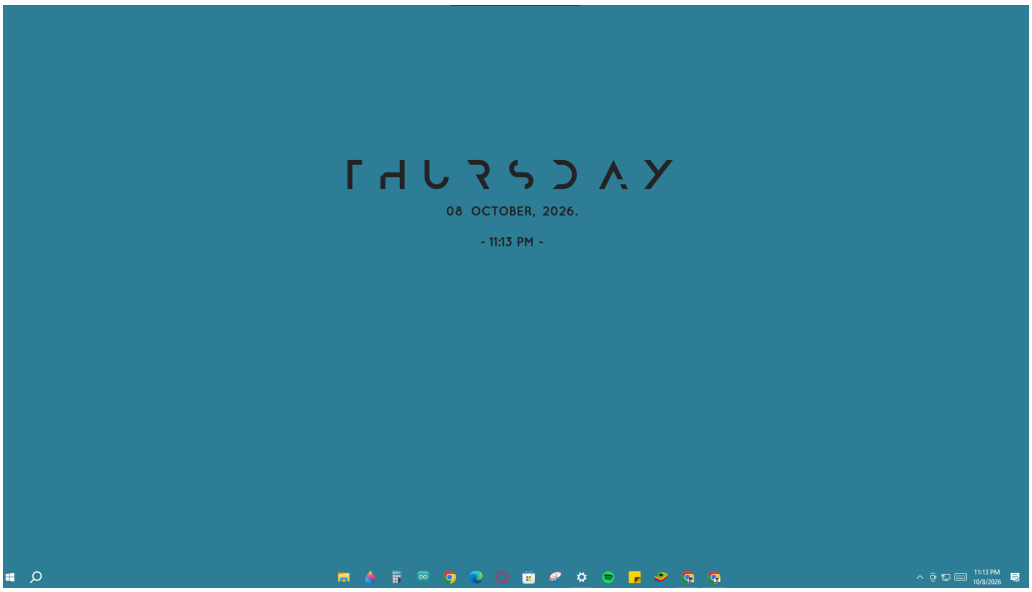



d. Close all open windows.

## Step 2: Open the registry editor.

a. To open the **Registry Editor**, click **Start** and type **regedit**. Click **Yes** to allow Registry Editor to make changes to the computer.

**Note**: Do not make any changes in the Registry Editor without instructor permission.


b. Select and expand the **HKEY_CURRENT_USER** entry.

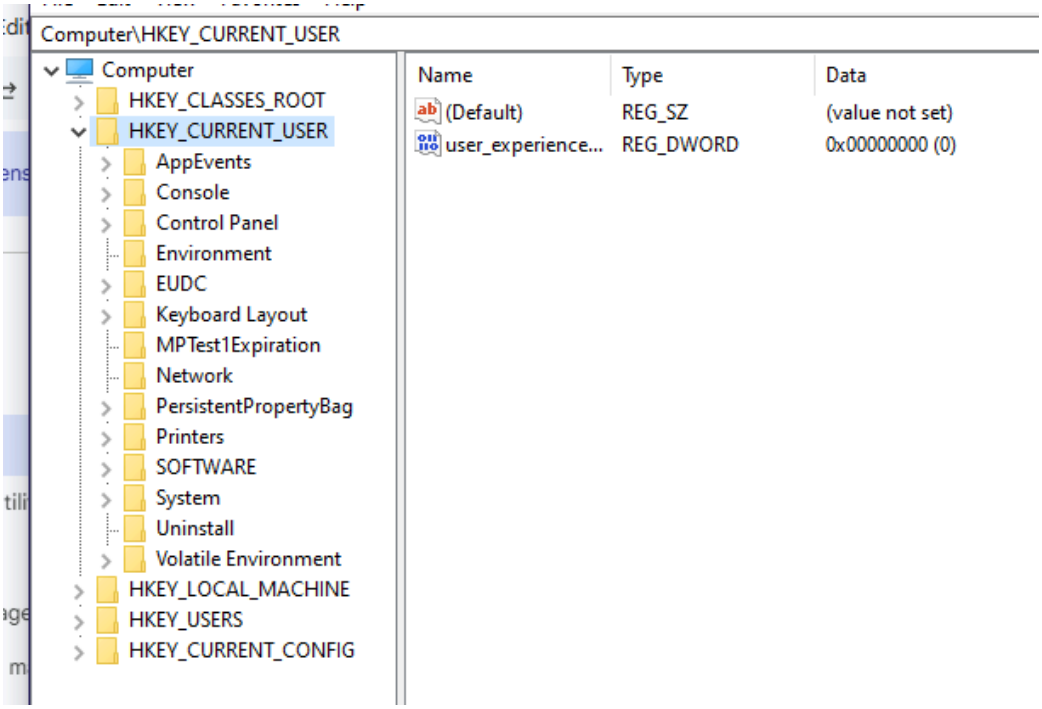



© 2015 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

www.netacad.com

c. Expand **Control Panel**. Click **Colors**. Click **Background** in the right panel.

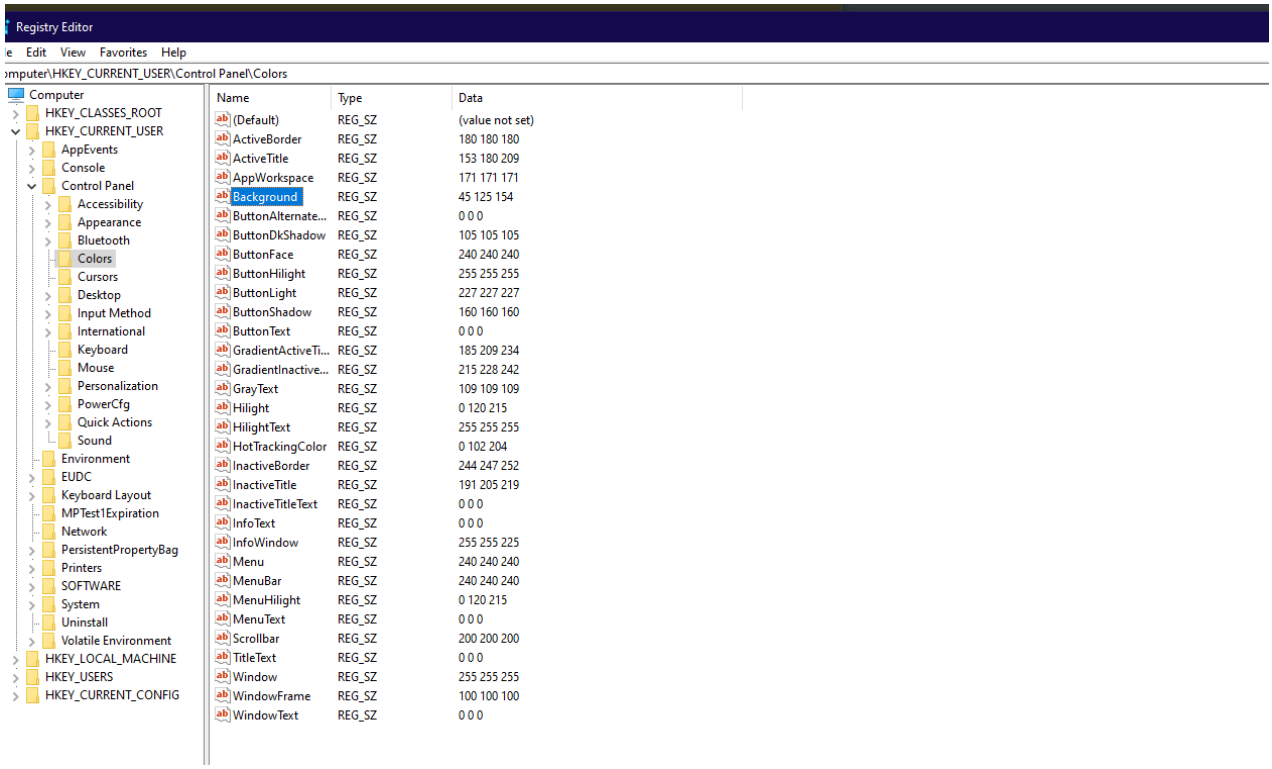

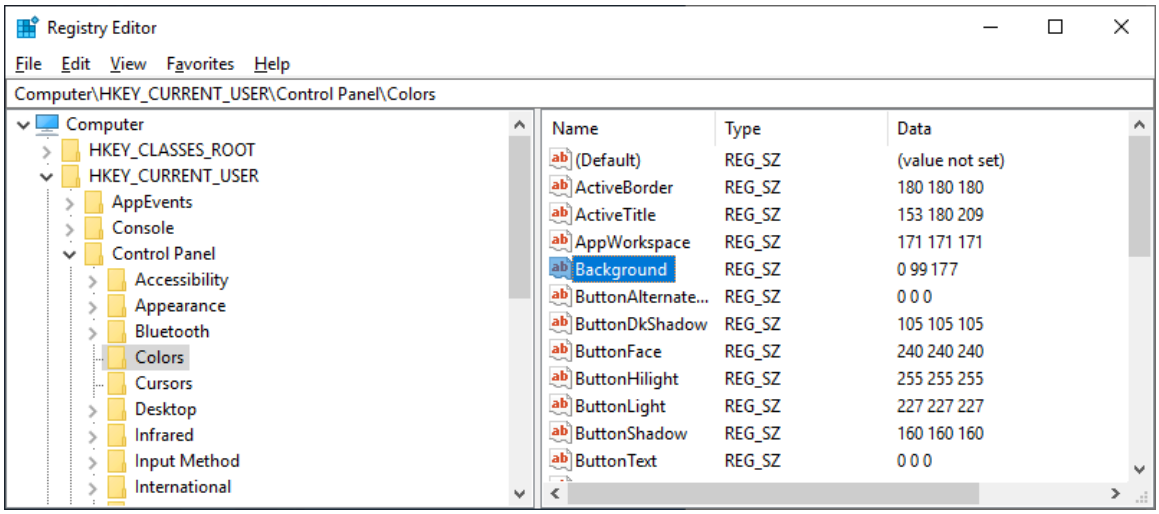
Question:

What is the data value of the Background (hint – it has three numbers that correspond to red, green, and blue)?

*45, 125 and 154.*

## Step 3: Export a registry key.


You will export the **HKEY_CURRENT_USER\Control Panel\Colors** folder.

a. In the left pane, select the **Colors** folder and click **File > Export**.

© 2015 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

b. Save the file to the Desktop with the name **BlueBKG**.

c. At the desktop, right-click the **BlueBKG.reg** icon and select **Edit**.

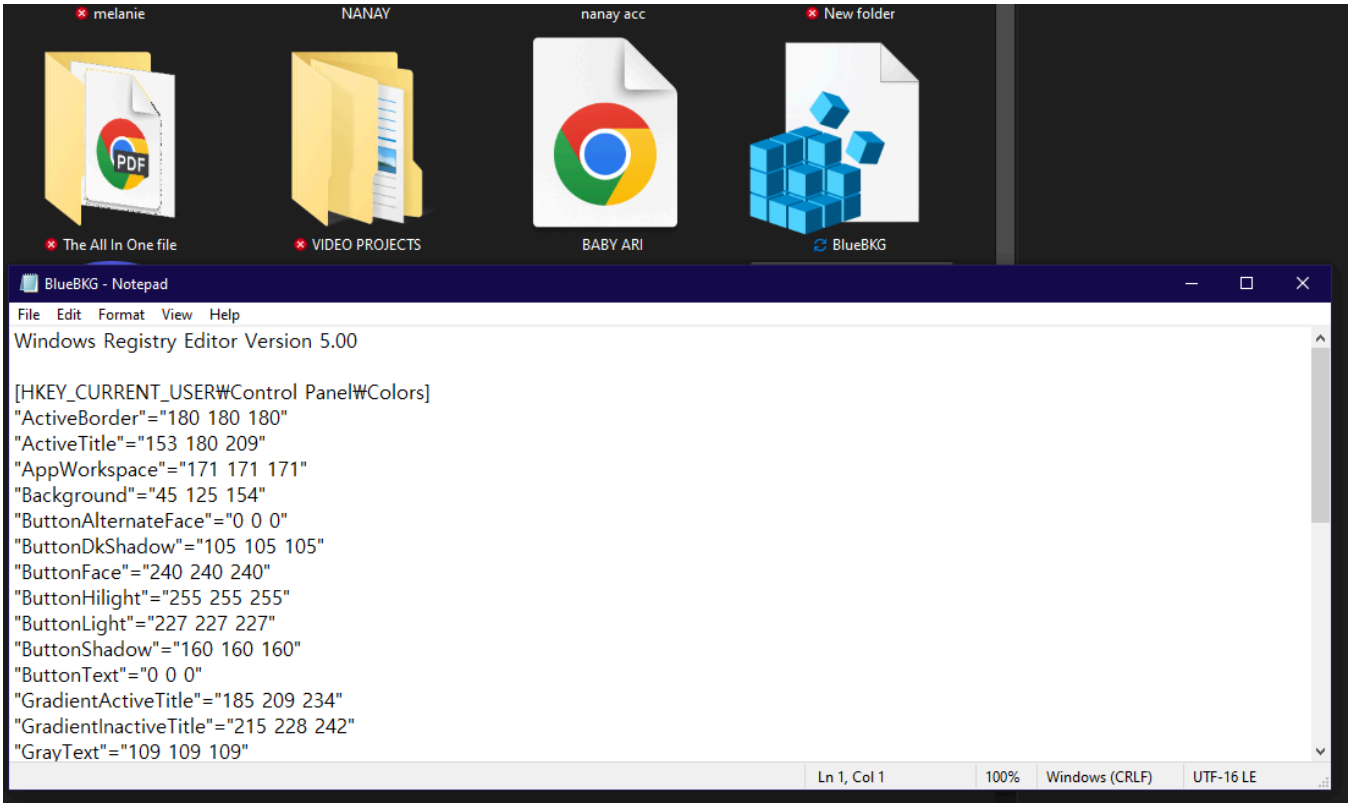


d. Notepad opens displaying the contents of **BlueBKG.reg**.

Question:

What is the data value of the **Background**?


***45 125 154.***

e. Close the **BlueBKG.reg – Notepad** window.

f. Open the Personalization window by right-clicking the **Desktop > Personalize > Desktop Background**. Select a **red** background color.

g. Click **Save** changes. Close the **Personalization** window.

© 2015 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

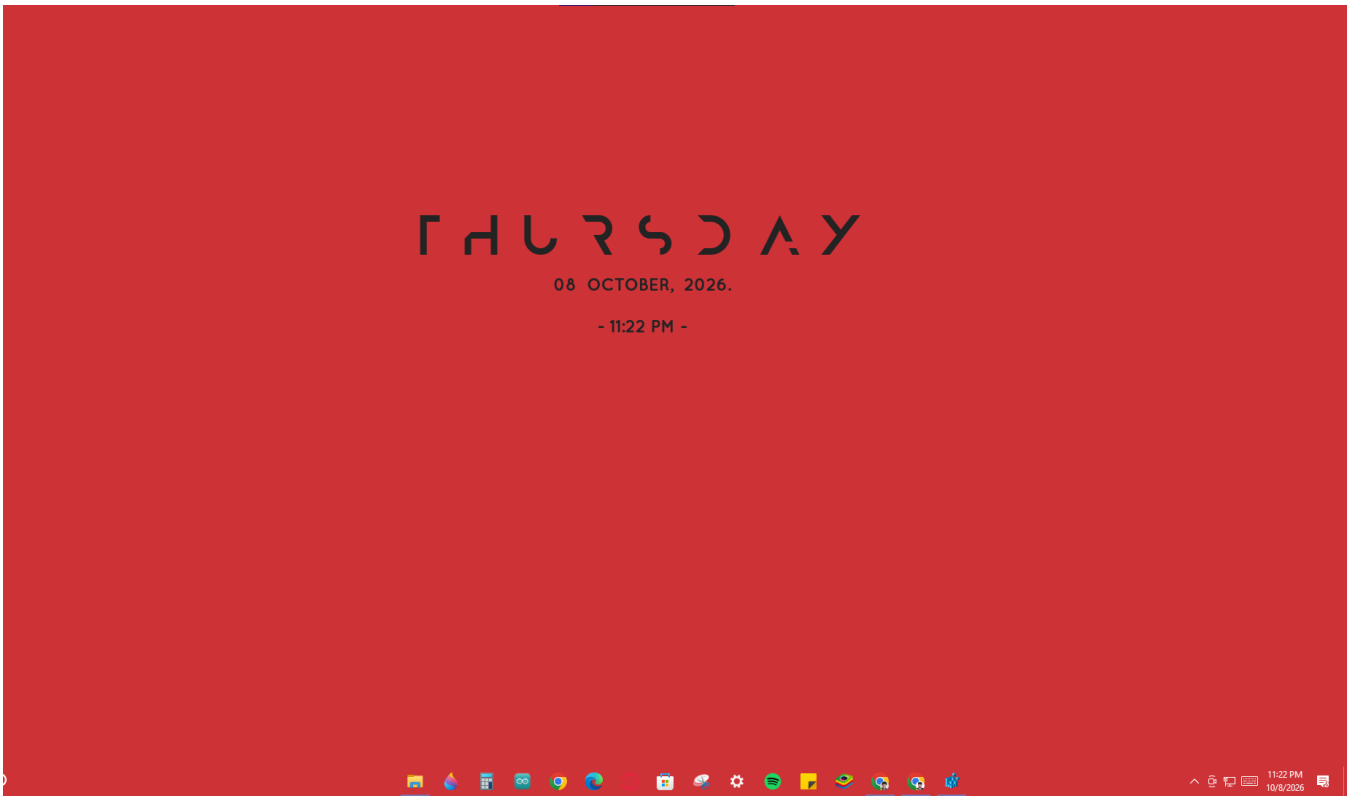


h. The desktop background should be red. Click the **Registry Editor** window.

i. On your keyboard, press **F5** to refresh the **Registry Editor** window.

Question:

What is the data value of the Background? Compare the new value in the Registry to the value saved in BlueBKG.reg.

***209 52 56 the red color has a significant value than other colors.***

## Step 4: Import a registry file.

You will import the **BlueBKG.reg** file to change the Desktop ground back to blue.

a. Click the **Registry Editor** window.

b. Click **File** > **Import**. Locate and click the **BlueBKG.reg** file then click **Open**.

c. The **Registry Editor** informational message opens letting you know that keys and values have been successfully added to the registry. Click **OK**.

d. Select the **Registry Editor** window.

Questions:

What is the data value of the Background?

***45 125 154.***

What is the color of the desktop?

***Still Red.***

e. Restart the computer.

© 2015 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

Question:

What is the color of the desktop?

***It is now back to the color blue.***

f. Reset **Display Properties Background** to the original settings.

g. Close all open windows.

h. Delete the custom console and BlueBKG file on the desktop.

## Reflection Question

1. Why would it be beneficial to add snap-ins to the mmc that are for other computers on the network?

   ***It is beneficial because it allows an administrator to manage and monitor other computers on the network from one computer. This makes troubleshooting and system management easier without needing to access each computer physically.***

2. After restarting the computer, why was the desktop color changed?

   ***The desktop color changed because the system settings were modified through the MMC configuration. After restarting, the computer applied the new settings, which caused the desktop color to change.***

© 2015 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public