

CSE 713: Artificial Intelligence

Search Algorithms — Complete Model Answers

University of Chittagong — 7th Semester B.Sc. (Engg.) Examination

Covers Years: 2024, 2023, 2022, 2021, 2020 — Topics: UCS, BFS, DFS, Greedy, A*,
IDDFS, IDA*

Contents

1 Examination 2024 — Q2 (9 Marks)	2
1.1 Problem Data	2
1.2 Part a(i) — State-Space Graph [1 mark]	2
1.3 Part a(ii) — Search Algorithm Traces [5 marks]	3
1.4 Part b — Problem Formulations [3 marks]	8

Examination 2024 — Q2 (9 Marks)

Problem Data

States: A (start), B, C, D, E, F, H, J, K, G (goal). All roads bidirectional.

Table 1: Road Connections and Step Costs


From	To	Cost
A	B	3
A	C	4
A	D	7
B	E	6
B	F	5
C	F	11
C	H	4
D	H	2
D	J	10
E	G	7
E	H	3
F	G	9
F	J	4
H	G	5
H	K	6
J	K	3
K	G	4

Table 2: Heuristic Estimates $h(n)$ to Goal G

Node	$h(n)$
A	11
B	10
C	7
D	6
E	6
F	6
H	4
J	5
K	3
G	0

Part a(i) — State-Space Graph [1 mark]

Question: Using Table 1, draw the state-space graph clearly labelling all nodes and edge costs.

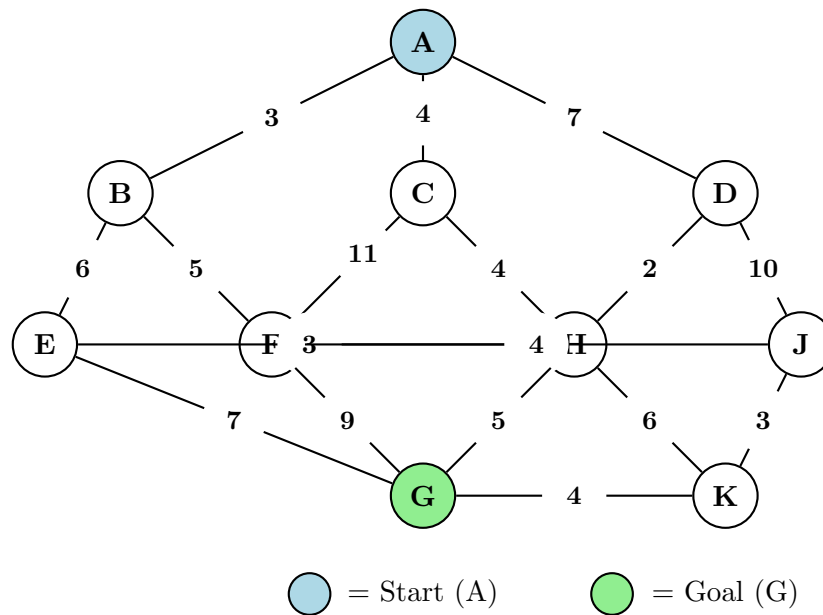

Note: The edge E–H is curved upward and F–J is curved downward to avoid visual ambiguity where nodes share the same y -coordinate. All edges are **bidirectional** (undirected).

Part a(ii) — Search Algorithm Traces [5 marks]

Question: Show search trees for (1) UCS, (2) Greedy Best-First, (3) A*, (4) IDDFS from A to G. At every step: show node being expanded and fringe contents in order of selection. For IDDFS: show depth limit per iteration. Ties broken alphabetically.

Algorithm 1 — Uniform-Cost Search (UCS)

Key idea: Always expand the node with the **lowest path cost** $g(n)$ from the start. The fringe is a **min-priority queue sorted by** $g(n)$. A node is closed (never re-expanded) once popped. If a *cheaper* path to a fringe node is found, its cost is updated (replaced).

Fringe notation: Node[g] sorted ascending by g .

Step	Node Expanded	$g(n)$	Fringe after expansion (sorted by g)
1	A	0	B[3], C[4], D[7] Neighbours of A: B($g=3$), C($g=4$), D($g=7$).
2	B	3	C[4], D[7], F[8], E[9] A already closed. $B \rightarrow F$: $g=8$; $B \rightarrow E$: $g=9$. Both new.
3	C	4	D[7], F[8], H[8], E[9] $C \rightarrow F$: $g=15 > 8$ already in fringe $\Rightarrow$ keep F[8]. $C \rightarrow H$: $g=8$ new.
4	D	7	F[8], H[8], E[9], J[17] $D \rightarrow H$: $g=9 > 8$ in fringe $\Rightarrow$ keep H[8]. $D \rightarrow J$: $g=17$ new. Tie F,H: F before H (alphabetical).
5	F	8	H[8], E[9], J[12], G[17] $F \rightarrow G$: $g=17$ new. $F \rightarrow J$: $g=12 < 17$ in fringe $\Rightarrow$ update J[12].
6	H	8	E[9], J[12], G[13], K[14] $H \rightarrow E$: $g=11 > 9$ in fringe $\Rightarrow$ keep E[9]. $H \rightarrow G$: $g=13 < 17 \Rightarrow$ update G[13]. $H \rightarrow K$: $g=14$ new.
7	E	9	J[12], G[13], K[14] $E \rightarrow G$: $g=16 > 13$ in fringe $\Rightarrow$ keep G[13].
8	J	12	G[13], K[14] $J \rightarrow K$: $g=15 > 14$ in fringe $\Rightarrow$ keep K[14].
9	G	13	GOAL FOUND

UCS Solution: $A \xrightarrow{4} C \xrightarrow{4} H \xrightarrow{5} G$ **Total cost:** $4 + 4 + 5 = 13$
 Nodes expanded (in order): A, B, C, D, F, H, E, J, G (9 nodes total)
 UCS **guarantees the optimal path** because it always expands the cheapest unexplored node, never re-expands a closed node, and path costs are non-negative.

Algorithm 2 — Greedy Best-First Search

Key idea: Always expand the node with the **lowest heuristic estimate** $h(n)$ to the goal. The fringe is sorted by $h(n)$ (ascending). Path cost $g(n)$ is *completely ignored*. Greedy is fast but not guaranteed to find the optimal path.

Fringe notation: Node[h] sorted ascending by h .

Step	Node Expanded	$h(n)$	Fringe after expansion (sorted by h)
1	A	11	D[6], C[7], B[10] Neighbours B($h=10$), C($h=7$), D($h=6$). Sorted by h : D, C, B.
2	D	6	H[4], J[5], C[7], B[10] D's neighbours excl. A: H($h=4$), J($h=5$).
3	H	4	G[0], K[3], J[5], E[6], C[7], B[10] H's neighbours excl. D: C($h=7$, already in fringe—skip), E($h=6$), G($h=0$), K($h=3$).
4	G	0	GOAL FOUND

Greedy Solution: $A \xrightarrow{7} D \xrightarrow{2} H \xrightarrow{5} G$ **Total cost:** $7 + 2 + 5 = 14$ (not optimal!)

Nodes expanded: A, D, H, G (only 4 nodes — very fast)

Greedy expanded just 4 nodes versus UCS's 9, but found a **suboptimal path** (cost 14 vs optimal 13). It followed the heuristic blindly: D had the lowest h from A, leading it down the D–H–G route instead of the cheaper A–C–H–G route.

Algorithm 3 — A* Search

Key idea: Expand the node with the **lowest evaluation function** $f(n) = g(n) + h(n)$, where $g(n)$ = exact cost from start and $h(n)$ = heuristic estimate to goal. The fringe is sorted by $f(n)$ (ascending). Ties in f broken alphabetically. If a cheaper path to a fringe node is found, update its entry.

Fringe notation: Node[g, h, f] sorted ascending by f .

Step	Node	g	h	f	Fringe after expansion (sorted by f)
1	A	0	11	11	C[4,7, 11], B[3,10, 13], D[7,6, 13] Tie B,D at $f=13$: B first.
2	C	4	7	11	H[8,4, 12], B[3,10, 13], D[7,6, 13], F[15,6, 21] $C \rightarrow H$: $g=8, f=12$ new. $C \rightarrow F$: $g=15, f=21$ new.
3	H	8	4	12	B[3,10, 13], D[7,6, 13], G[13,0, 13], E[11,6, 17], K[14,3, 17], F[15,6, 21] $H \rightarrow D$: $f=16 > 13$, keep. $H \rightarrow G$: $f=13$ new. $H \rightarrow E$: $f=17$ new. $H \rightarrow K$: $f=17$ new. Tie B,D,G at $f=13$: B first .
4	B	3	10	13	D[7,6, 13], G[13,0, 13], F[8,6, 14], E[9,6, 15], K[14,3, 17] $B \rightarrow F$: $g=8, f=14 < 21 \Rightarrow$ update F. $B \rightarrow E$: $g=9, f=15 < 17 \Rightarrow$ update E. Tie D,G at $f=13$: D first .
5	D	7	6	13	G[13,0, 13], F[8,6, 14], E[9,6, 15], K[14,3, 17], J[17,5, 22] $D \rightarrow J$: $g=17, f=22$ new.
6	G	13	0	13	GOAL FOUND

A* Solution: $A \xrightarrow{4} C \xrightarrow{4} H \xrightarrow{5} G$ **Total cost:** $4 + 4 + 5 = 13$ (optimal!)
 Nodes expanded: A, C, H, B, D, G (6 nodes — fewer than UCS's 9)
 A* is both **complete** and **optimal** when the heuristic is *admissible* ($h(n) \leq h^*(n)$, i.e. it never overestimates). It is more efficient than UCS because $h(n)$ guides the search toward promising nodes, pruning unpromising directions early.

Algorithm 4 — Iterative Deepening DFS (IDDFS)

Key idea: Perform DFS with a depth cutoff $L = 0, 1, 2, \dots$, restarting from the root each time, until the goal is found. The “fringe” is a **stack** (LIFO). Children are pushed in *reverse* alphabetical order so they are *popped* (and expanded) in alphabetical order. Nodes on the **current path** (ancestors) are not revisited to avoid infinite loops.

Stack notation: Leftmost entry = top of stack (next to be popped). Depth shown in parentheses.

Iteration $L = 0$:

Step	Action	Stack (top $\leftarrow$ left)
1	Pop A (d=0). $A \neq G$. At depth limit — cannot expand.	[]
<i>No solution at $L = 0$.</i>		

Iteration $L = 1$:

Step	Action	Stack
1	Pop A (d=0). Expand: push D,C,B (B on top).	B(1), C(1), D(1)
2	Pop B (d=1). $B \neq G$. At depth limit.	C(1), D(1)
3	Pop C (d=1). $C \neq G$. At depth limit.	D(1)
4	Pop D (d=1). $D \neq G$. At depth limit.	[]
<i>No solution at $L = 1$.</i>		

Iteration $L = 2$:

Step	Action	Stack
1	Pop A (d=0). Expand: B,C,D.	B(1), C(1), D(1)
2	Pop B (d=1). Expand (excl. A): E,F. Push F,E.	E(2), F(2), C(1), D(1)
3	Pop E (d=2). $E \neq G$. At limit.	F(2), C(1), D(1)
4	Pop F (d=2). At limit.	C(1), D(1)
5	Pop C (d=1). Expand (excl. A): F,H. Push H,F.	F(2), H(2), D(1)
6	Pop F (d=2). At limit.	H(2), D(1)
7	Pop H (d=2). At limit.	D(1)
8	Pop D (d=1). Expand (excl. A): H,J. Push J,H.	H(2), J(2)
9	Pop H (d=2). At limit.	J(2)
10	Pop J (d=2). At limit.	[]
<i>No solution at $L = 2$.</i>		

Iteration $L = 3$:

Step	Action	Stack
1	Pop A (d=0). Expand: B,C,D.	B(1), C(1), D(1)
2	Pop B (d=1). Expand (excl. A): E,F.	E(2), F(2), C(1), D(1)
3	Pop E (d=2). Expand (excl. B): G,H. Push H first then G (G on top).	G(3), H(3), F(2), C(1)
4	Pop G (d=3). $G = \text{GOAL}$.	GOAL FOUND

IDDFS Solution: $A \xrightarrow{3} B \xrightarrow{6} E \xrightarrow{7} G$ **Depth: 3** **Cost:** $3 + 6 + 7 = 16$

IDDFS found the solution at depth-limit $L = 3$ in just 4 node expansions during the final iteration.

Important distinction: IDDFS finds the *shallowest* path (fewest hops), **not** the lowest-cost path. The optimal path $A \rightarrow C \rightarrow H \rightarrow G$ also has depth 3, but alphabetical DFS expansion reaches G via $B \rightarrow E \rightarrow G$ first. For non-uniform step costs, IDDFS is **not optimal**. It is however **complete** — it will always find a solution if one exists.

Why IDDFS over BFS? IDDFS uses only $O(bL)$ space (a single stack), whereas BFS requires $O(b^L)$ space to store all frontier nodes. The repeated work is a constant factor overhead.

Algorithm Comparison Summary:

Algorithm	Path Found	Cost	Nodes Expanded	Optimal?
UCS	$A \rightarrow C \rightarrow H \rightarrow G$	13	9 (all iterations)	Yes
Greedy	$A \rightarrow D \rightarrow H \rightarrow G$	14	4	No
A*	$A \rightarrow C \rightarrow H \rightarrow G$	13	6	Yes
IDDFS	$A \rightarrow B \rightarrow E \rightarrow G$	16	4 (final iter.)	No (non-uniform costs)

Part b — Problem Formulations [3 marks]

Question: Give the initial state, goal test, operators, and path cost function for each problem.

(i) Robot Vacuum Cleaning Problem (Indoor Environment)

State: A pair (l, D) where l is the robot's current room and $D \subseteq \{\text{all rooms}\}$ is the set of dirty rooms. *Example:* (Kitchen, {Bedroom, Lounge}).

Initial state: (start room, {all currently dirty rooms}).

Goal test: $D = \emptyset$ (no dirty rooms remain).

Operators:

1. $\text{Move}(r_i \rightarrow r_j)$: Move from room r_i to adjacent room r_j (changes location; D unchanged).
2. $\text{Suck}()$: Vacuum the current room (removes current room from D if dirty).

Static obstacles (furniture) constrain which rooms are adjacent.

Path cost: Total energy used: each Move costs c_{move} energy units; each Suck costs c_{suck} units. Goal: minimise total energy.

Informed vs. Uninformed: **Informed search (A*) is more suitable.** A strong heuristic $h(n) = |D| \times \bar{d}$ (number of remaining dirty rooms multiplied

by average travel cost between rooms) estimates remaining work without overestimating. With many rooms, uninformed BFS/UCS must explore exponentially many (l, D) state combinations blindly. A* with a good heuristic dramatically prunes this search space.

(ii) Water Jug Problem (5L and 3L Jugs)

State: A pair (x, y) where $x \in \{0, 1, 2, 3, 4, 5\}$ is water (litres) in the 5L jug and $y \in \{0, 1, 2, 3\}$ is water in the 3L jug.

Initial state: $(0, 0)$ — both jugs empty.

Goal test: $x = 4$ (exactly 4 litres in the 5L jug). The 3L jug cannot hold 4L, so only $x = 4$ satisfies the goal.

Operators:

1. **Fill 5L:** $(x, y) \rightarrow (5, y)$
2. **Fill 3L:** $(x, y) \rightarrow (x, 3)$
3. **Empty 5L:** $(x, y) \rightarrow (0, y)$
4. **Empty 3L:** $(x, y) \rightarrow (x, 0)$
5. **Pour 5L $\rightarrow$ 3L:** $(x, y) \rightarrow (x-d, y+d)$ where $d = \min(x, 3-y)$
6. **Pour 3L $\rightarrow$ 5L:** $(x, y) \rightarrow (x+d, y-d)$ where $d = \min(y, 5-x)$

Path cost: Number of actions performed (1 per action), minimised to find the shortest sequence.

State space: **FINITE.** The 5L jug holds integer amounts $\{0, 1, 2, 3, 4, 5\}$ (6 values) and the 3L jug holds $\{0, 1, 2, 3\}$ (4 values), giving at most $6 \times 4 = 24$ states. Not all are reachable, but the space is strictly bounded.

One valid solution path (6 steps):

$$(0, 0) \xrightarrow{\text{Fill 5L}} (5, 0) \xrightarrow{\text{Pour 5} \rightarrow \text{3}} (2, 3) \xrightarrow{\text{Empty 3L}} (2, 0) \xrightarrow{\text{Pour 5} \rightarrow \text{3}} (0, 2) \xrightarrow{\text{Fill 5L}} (5, 2) \xrightarrow{\text{Pour 5} \rightarrow \text{3}} (4, 2)$$