



Department of Computer Science

Advance Programming project

Submitted By:

Ahsan Ullah RC_9248420

Areeb Fatima RC_9248421

Zain yasir khan RC_9248419

Semester: 4

Submitted to Sir:

Mr :Tayyab

Movie Ticket Management System

Introduction

The Movie Ticket Management System is a web-based application developed using ASP.NET Web Forms and SQL Server. The main purpose of this system is to allow users to view movies, book tickets online, and manage their bookings efficiently. The system also includes an admin panel for managing movie records.

Objective of the Project

The main objectives of this project are:

- To provide an online platform for movie ticket booking
- To manage movie details through an admin panel
- To store and retrieve data using SQL Server database
- To provide a simple and user-friendly interface using ASP.NET Web Forms

Technologies Used

- Frontend: ASP.NET Web Forms, HTML, CSS, Bootstrap
- Backend: C# (ASP.NET)
- Database: Microsoft SQL Server
- IDE: Microsoft Visual Studio

System Modules

1) Admin Module

The admin module is responsible for managing movie data.

Features:

- Admin Login
- Add Movies
- View Movies (Manage Movies)
- Update/Delete Movies (optional enhancement)

2) User Module

The user module allows customers to interact with the system.

Features:

- View Movies
- Book Tickets
- View My Bookings

Source Code

Site1.master(Master page)

```
<%@ Master Language="C#" AutoEventWireup="true" CodeBehind="Site1.master.cs"
Inherits="AP_LAB_PROJECT.Site1" %>

<!DOCTYPE html>

<html lang="en">

<head runat="server">

    <meta charset="utf-8" />

    <meta name="viewport" content="width=device-width, initial-scale=1" />

    <title>CineMagic | Movie Ticket System</title>

    <!-- Google Font -->

    <link href="https://fonts.googleapis.com/css2?family=Poppins:wght@300;400;600;700&display=swap"
rel="stylesheet">

    <!-- Bootstrap -->

    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/css/bootstrap.min.css" rel="stylesheet" />

    <!-- Font Awesome -->

    <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/font-awesome@6.4.0/css/all.min.css" />

    <style>

        :root {

            --primary-color: #e50914;

            --dark-bg: #0f0f0f;

        }

        body {

            font-family: 'Poppins', sans-serif;

            background-color: #1a1a1a;

            color: #fff;

            margin: 0;

        }

        .navbar {

            background: rgba(0,0,0,0.85);

            backdrop-filter: blur(10px);

            border-bottom: 1px solid rgba(255,255,255,0.1);
```

```
padding: 15px 0;
}
.navbar-brand {
  color: var(--primary-color) !important;
  font-size: 1.5rem;
  letter-spacing: 1px;
}
.nav-link {
  transition: 0.3s;
  font-weight: 500;
}
.nav-link:hover {
  color: var(--primary-color) !important;
  transform: translateY(-2px);
}
.hero {
  background: linear-gradient(rgba(0,0,0,0.6), rgba(26,26,26,1)),
  url('https://images.unsplash.com/photo-1489599849927-
2ee91cede3ba?auto=format&fit=crop&w=1350&q=80');
  background-size: cover;
  background-position: center;
  height: 420px;
  display: flex;
  align-items: center;
  justify-content: center;
  text-align: center;
  flex-direction: column;
}
.hero h1 {
  font-size: 3rem;
  font-weight: 700;
```

```
}

.hero p {
  font-size: 1.2rem;
  opacity: 0.9;
}

.main-content {
  min-height: 500px;
  padding: 40px 0;
}

.btn-booking {
  background-color: var(--primary-color);
  color: #fff;
  border-radius: 30px;
  padding: 10px 20px;
  font-weight: 600;
  border: none;
  transition: 0.3s;
}

.btn-booking:hover {
  background-color: #b20710;
  color: #fff;
  box-shadow: 0 0 15px rgba(229,9,20,0.5);
}

.footer {
  background: #000;
  border-top: 1px solid #333;
  padding: 30px 0;
  text-align: center;
  margin-top: 40px;
}

.footer i {
```

```
font-size: 1.3rem;

margin: 0 10px;

cursor: pointer;

}

.footer i:hover {

    color: var(--primary-color);

}
```

```
</style>
```

```
<asp:ContentPlaceHolder ID="head" runat="server">
```

```
</asp:ContentPlaceHolder>
```

```
</head>
```

```
<body>
```

```
<form id="form1" runat="server">
```

```
<nav class="navbar navbar-expand-lg navbar-dark sticky-top">
```

```
<div class="container">
```

```
<a class="navbar-brand fw-bold text-uppercase" href="Home.aspx">
```

```
<i class="fas fa-film me-2"></i>CineMagic
```

```
</a>
```

```
<button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-  
target="#navMenu">
```

```
<span class="navbar-toggler-icon"></span>
```

```
</button>
```

```
<div class="collapse navbar-collapse" id="navMenu">
```

```
<ul class="navbar-nav ms-auto align-items-center">
```

```
<li class="nav-item">
```

```
<a class="nav-link" href="Home.aspx">Home</a>
```

```
</li>
```

```
<li class="nav-item">
```

```
<a class="nav-link" href="Movies.aspx">Movies</a>
```

```
</li>
```

```
<li class="nav-item">
```

```

        <a class="nav-link" href="MyBookings.aspx">My Bookings</a>

    </li>

    <li class="nav-item mx-2">

        <a class="btn btn-booking" href="BookTicket.aspx">Book Now</a>

    </li>

    <li class="nav-item">

        <a class="nav-link text-secondary ms-3 small" href="AdminLogin.aspx">

            <i class="fas fa-user-shield me-1"></i>Admin

        </a>

    </li>

</ul>

</div>

</div>

</nav>

<!-- HERO SECTION -->

<header class="hero">

    <div class="container">

        <h1>Experience Cinema Like Never Before</h1>

        <p>Book your favorite movies instantly with CineMagic</p>

    </div>

</header>

<!-- PAGE CONTENT -->

<div class="container main-content">

    <asp:ContentPlaceHolder ID="ContentPlaceHolder1" runat="server">

        </asp:ContentPlaceHolder>

    </div>

<!-- FOOTER -->

<footer class="footer">

    <div class="container">

        <div class="mb-3">

            <i class="fab fa-facebook"></i>

```

```

        <i class="fab fa-instagram"></i>

        <i class="fab fa-twitter"></i>

    </div>

    <p class="text-secondary mb-0">© 2026 CineMagic Systems</p>

    <small class="text-muted">Built for ASP.NET Lab Project</small>

</div>

</footer>

</form>

<!-- Bootstrap JS -->

<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/js/bootstrap.bundle.min.js"></script>

</body>

</html>

```

code of user side pages

Home.aspx

```

<%@ Page Title="" Language="C#" MasterPageFile="~/Site1.Master" AutoEventWireup="true"
CodeBehind="Home.aspx.cs" Inherits="AP_LAB_PROJECT.Home" %>

<asp:Content ID="Content1" ContentPlaceHolderID="ContentPlaceHolder1" runat="server">

    <div class="text-center mb-5">

        <h1 class="fw-bold">Welcome to CineMagic 🎬</h1>

        <p class="text-muted">Book your favorite movies easily and quickly</p>

    </div>

    <div class="row text-center">

        <div class="col-md-4">

            <div class="card bg-dark text-white p-3">

                <h4>🎬 Latest Movies</h4>

                <p>Watch trending blockbusters</p>

            </div>

        </div>

        <div class="col-md-4">

            <div class="card bg-dark text-white p-3">

                <h4>🎟 Easy Booking</h4>

```



```

        <p>Book tickets in seconds</p>

    </div>

</div>

<div class="col-md-4">

    <div class="card bg-dark text-white p-3">

        <h4>🎬 Cinema Experience</h4>

        <p>Enjoy premium movie experience</p>

    </div>

</div>

</div>

</asp:Content>

```

Movies.aspx

```

<%@ Page Title="" Language="C#" MasterPageFile="~/Site1.Master" AutoEventWireup="true"
CodeBehind="Movies.aspx.cs" Inherits="AP_LAB_PROJECT.Movies" %>

<asp:Content ID="Content1" ContentPlaceHolderID="ContentPlaceHolder1" runat="server">

    <h2 class="text-center mb-4">🎬 Now Showing</h2>

    <div class="row">

        <asp:Repeater ID="rptMovies" runat="server">

            <ItemTemplate>

                <div class="col-md-4 mb-4">

                    <div class="card bg-dark text-white p-3">

                        <h4><%# Eval("Title") %></h4>

                        <p>

                            🎭 <%# Eval("Genre") %> <br />

                            🕒 <%# Eval("ShowTime") %> <br />

                            💰 <%# Eval("Price") %>

                        </p>

                        <a href='BookTicket.aspx?MovieID=<%# Eval("MovieID") %>'

                            class="btn btn-danger">

                                🎫 Book Now

                        </a>

```

</div>

</div>

</ItemTemplate>

</asp:Repeater>

</div>

</asp:Content>

Movie.aspx.cs

using System;

using System.Data;

using System.Data.SqlClient;

using System.Configuration;

namespace AP_LAB_PROJECT

{

public partial class Movies : System.Web.UI.Page

{

protected void Page_Load(object sender, EventArgs e)

{

if (!IsPostBack)

{

LoadMovies();

}

}

void LoadMovies()

{

string conn = @"Data Source=DESKTOP-6EE5ANN\MSSQLSERVER01;Initial Catalog=MovieDB;Integrated Security=True";

SqlConnection con = new SqlConnection(conn);

SqlDataAdapter da = new SqlDataAdapter("SELECT * FROM Movies", con);

DataTable dt = new DataTable();

da.Fill(dt);

rptMovies.DataSource = dt;

```
rptMovies.DataBind();
```

```
}}}
```

BookTicket.aspx

```
<%@ Page Title="" Language="C#" MasterPageFile="~/Site1.Master" AutoEventWireup="true"
CodeBehind="BookTicket.aspx.cs" Inherits="AP_LAB_PROJECT.BookTicket" %>
```

```
<asp:Content ID="Content1" ContentPlaceHolderID="ContentPlaceHolder1" runat="server">
```

```
<h2 class="text-center mb-4">🎬 Book Your Ticket</h2>
```

```
<div class="row justify-content-center">
```

```
<div class="col-md-6">
```

```
<div class="card bg-dark text-white p-4">
```

```
<div class="mb-3">
```

```
<label>Movie Name</label>
```

```
<asp:TextBox ID="txtMovie" runat="server" CssClass="form-control"></asp:TextBox>
```

```
</div>
```

```
<div class="mb-3">
```

```
<label>Your Name</label>
```

```
<asp:TextBox ID="txtName" runat="server" CssClass="form-control"></asp:TextBox>
```

```
</div>
```

```
<div class="mb-3">
```

```
<label>Seats</label>
```

```
<asp:TextBox ID="txtSeats" runat="server" CssClass="form-control"
TextMode="Number"></asp:TextBox>
```

```
</div>
```

```
<div class="mb-3">
```

```
<label>Date</label>
```

```
<asp:TextBox ID="txtDate" runat="server" CssClass="form-control"
TextMode="Date"></asp:TextBox>
```

```
</div>
```

```
<asp:Button ID="btnBook" runat="server" Text="Book Now"
```

```
CssClass="btn btn-danger w-100"
```

```
OnClick="btnBook_Click" />
```

```
<br /><br />
```

```

        <asp:Label ID="lblMsg" runat="server" ForeColor="LightGreen"></asp:Label>

    </div>

</div>

</div>

</asp:Content>

```

BookTicket.aspx.cs

```

using System;

using System.Data.SqlClient;

using System.Configuration;

namespace AP_LAB_PROJECT
{
    public partial class BookTicket : System.Web.UI.Page
    {
        int movieId;

        protected void Page_Load(object sender, EventArgs e)
        {
            if (Request.QueryString["MovieID"] != null)
            {
                movieId = Convert.ToInt32(Request.QueryString["MovieID"]);
            }
        }

        protected void btnBook_Click(object sender, EventArgs e)
        {
            string conn = @"Data Source=DESKTOP-6EE5ANN\MSSQLSERVER01;Initial
Catalog=MovieDB;Integrated Security=True";

            SqlConnection con = new SqlConnection(conn);

            string query = "INSERT INTO Bookings (MovieID, CustomerName, Seats, BookingDate) " +
                "VALUES (@MovieID, @Name, @Seats, @Date)";

            SqlCommand cmd = new SqlCommand(query, con);

            cmd.Parameters.AddWithValue("@MovieID", movieId);

            cmd.Parameters.AddWithValue("@Name", txtName.Text);

```

```

cmd.Parameters.AddWithValue("@Seats", txtSeats.Text);

cmd.Parameters.AddWithValue("@Date", txtDate.Text);

con.Open();

cmd.ExecuteNonQuery();

con.Close();

lblMsg.Text = "Ticket Booked Successfully 🎫";

}

}

}

```

MyBookings.aspx

```

<%@ Page Title="" Language="C#" MasterPageFile="~/Site1.Master" AutoEventWireup="true"
CodeBehind="MyBookings.aspx.cs" Inherits="AP_LAB_PROJECT.MyBookings" %>

<asp:Content ID="Content1" ContentPlaceHolderID="ContentPlaceHolder1" runat="server">

    <h2 class="text-center mb-4">🎫 My Bookings</h2>

    <div class="row justify-content-center">

        <div class="col-md-6">

            <div class="card bg-dark text-white p-4">

                <div class="mb-3">

                    <label>Enter Your Name</label>

                    <asp:TextBox ID="txtName" runat="server" CssClass="form-control"></asp:TextBox>

                </div>

                <asp:Button ID="btnSearch" runat="server" Text="Search Bookings"

                    CssClass="btn btn-danger w-100"

                    OnClick="btnSearch_Click" />

                <br /><br />

                <asp:Label ID="lblMsg" runat="server" ForeColor="LightGreen"></asp:Label>

            </div>

        </div>

    </div>

</div>

<br />

<asp:GridView ID="GridView1" runat="server"

```

```
CssClass="table table-dark table-striped">
```

```
</asp:GridView>
```

```
</asp:Content>
```

MyBookings.aspx.cs

```
using System;
```

```
using System.Data;
```

```
using System.Data.SqlClient;
```

```
using System.Configuration;
```

```
namespace AP_LAB_PROJECT
```

```
{
```

```
    public partial class MyBookings : System.Web.UI.Page
```

```
    {
```

```
        protected void Page_Load(object sender, EventArgs e)
```

```
        {
```

```
        }
```

```
        protected void btnSearch_Click(object sender, EventArgs e)
```

```
        {
```

```
            string conn = @"Data Source=DESKTOP-6EE5ANN\MSSQLSERVER01;Initial  
Catalog=MovieDB;Integrated Security=True";
```

```
            SqlConnection con = new SqlConnection(conn);
```

```
            string query = "SELECT * FROM Bookings WHERE CustomerName = @Name";
```

```
            SqlCommand cmd = new SqlCommand(query, con);
```

```
            cmd.Parameters.AddWithValue("@Name", txtName.Text);
```

```
            SqlDataAdapter da = new SqlDataAdapter(cmd);
```

```
            DataTable dt = new DataTable();
```

```
            da.Fill(dt);
```

```
            if (dt.Rows.Count > 0)
```

```
            {
```

```
                GridView1.DataSource = dt;
```

```
                GridView1.DataBind();
```

```
                lblMsg.Text = "Bookings Found ";
```

```

    }else{

        GridView1.DataSource = null;

        GridView1.DataBind();

        lblMsg.Text = "No Bookings Found ✖";

    }

}

}

}

```

Now pages from admin side

AdminLogin.aspx

```

<%@ Page Title="" Language="C#" MasterPageFile="~/Site1.Master" AutoEventWireup="true"
CodeBehind="AdminLogin.aspx.cs" Inherits="AP_LAB_PROJECT.AdminLogin" %>

<asp:Content ID="Content1" ContentPlaceHolderID="ContentPlaceHolder1" runat="server">

    <div class="row justify-content-center">

        <div class="col-md-5">

            <div class="card bg-dark text-white p-4">

                <h3 class="text-center mb-4">🔒 Admin Login</h3>

                <div class="mb-3">

                    <label>Username</label>

                    <asp:TextBox ID="txtUser" runat="server" CssClass="form-control"></asp:TextBox>

                </div>

                <div class="mb-3">

                    <label>Password</label>

                    <asp:TextBox ID="txtPass" runat="server" TextMode="Password" CssClass="form-
control"></asp:TextBox>

                </div>

                <asp:Button ID="btnLogin" runat="server" Text="Login" CssClass="btn btn-danger w-100"
OnClick="btnLogin_Click" />

                <br /><br />

                <asp:Label ID="lblMsg" runat="server" ForeColor="Red"></asp:Label>

            </div>

        </div>

    </div>

</div>

```

</div>

</asp:Content>

AdminLogin.aspx.cs

```
using System;

using System.Collections.Generic;

using System.Linq;

using System.Web;

using System.Web.UI;

using System.Web.UI.WebControls;

namespace AP_LAB_PROJECT
{
    public partial class AdminLogin : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
        }

        protected void btnLogin_Click(object sender, EventArgs e){
            if (txtUser.Text == "AhsanUllah" && txtPass.Text == "Ahsan#0099")
            {
                Response.Redirect("AdminDashboard.aspx");
            }
            else
            {
                lblMsg.Text = "Invalid Username or Password";
            }
        }
    }
}
```

AdminDashboard.aspx

```
<%@ Page Title="" Language="C#" MasterPageFile="~/Site1.Master" AutoEventWireup="true"
CodeBehind="AdminDashboard.aspx.cs" Inherits="AP_LAB_PROJECT.AdminDashboard" %>

<asp:Content ID="Content1" ContentPlaceHolderID="ContentPlaceHolder1" runat="server">

    <h2 class="text-center mb-4"><img alt="lock icon" data-bbox="338 868 348 882"/> Admin Dashboard</h2>

    <div class="row text-center">
```



```

<div class="col-md-4">

    <a href="AddMovie.aspx" class="btn btn-danger w-100 p-4">➕ Add Movie</a>

</div>

<div class="col-md-4">

    <a href="ManageMovies.aspx" class="btn btn-warning w-100 p-4">🎬 Manage Movies</a>

</div>

<div class="col-md-4">

    <a href="Home.aspx" class="btn btn-secondary w-100 p-4">🏠 Go to Site</a>

</div>

</div>

</asp:Content>

```

AddMovie.aspx

```

<%@ Page Title="" Language="C#" MasterPageFile="~/Site1.Master" AutoEventWireup="true"
CodeBehind="AddMovie.aspx.cs" Inherits="AP_LAB_PROJECT.AddMovie" %>

<asp:Content ID="Content1" ContentPlaceHolderID="ContentPlaceHolder1" runat="server">

    <div class="row justify-content-center">

        <div class="col-md-6">

            <div class="card bg-dark text-white p-4">

                <h3 class="text-center mb-4">➕ Add Movie</h3>

                <div class="mb-3">

                    <label>Movie Title</label>

                    <asp:TextBox ID="txtTitle" runat="server" CssClass="form-control"></asp:TextBox>

                </div>

                <div class="mb-3">

                    <label>Genre</label>

                    <asp:TextBox ID="txtGenre" runat="server" CssClass="form-control"></asp:TextBox>

                </div>

                <div class="mb-3">

                    <label>Show Time</label>

                    <asp:TextBox ID="txtTime" runat="server" CssClass="form-control"></asp:TextBox>

                </div>

            </div>

        </div>

    </div>

```

```

<div class="mb-3">

    <label>Price</label>

    <asp:TextBox ID="txtPrice" runat="server" CssClass="form-control"></asp:TextBox>

</div>

<asp:Button ID="btnSave" runat="server" Text="Save Movie"

    CssClass="btn btn-danger w-100"

    OnClick="btnSave_Click" />

<br /><br />

<asp:Label ID="lblMsg" runat="server" ForeColor="LightGreen"></asp:Label>

</div>

</div>

</div>

</asp:Content>

```

AddMovie.aspx.cs

```

using System;

using System.Collections.Generic;

using System.Linq;

using System.Web;

using System.Web.UI;

using System.Web.UI.WebControls;

using System.Data.SqlClient;

using System.Configuration;

namespace AP_LAB_PROJECT
{
    public partial class AddMovie : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void btnSave_Click(object sender, EventArgs e)
        {

```

```

        string conn = @"Data Source=DESKTOP-6EE5ANN\MSSQLSERVER01;Initial
Catalog=MovieDB;Integrated Security=True";

        SqlConnection con = new SqlConnection(conn);

        string query = "INSERT INTO Movies (Title, Genre, ShowTime, Price) " +
            "VALUES (@Title, @Genre, @ShowTime, @Price)";

        SqlCommand cmd = new SqlCommand(query, con);

        cmd.Parameters.AddWithValue("@Title", txtTitle.Text);

        cmd.Parameters.AddWithValue("@Genre", txtGenre.Text);

        cmd.Parameters.AddWithValue("@ShowTime", txtTime.Text);

        cmd.Parameters.AddWithValue("@Price", txtPrice.Text);

        con.Open();

        cmd.ExecuteNonQuery();

        con.Close();

        lblMsg.Text = "Movie Added Successfully! 🎬";

        txtTitle.Text = "";

        txtGenre.Text = "";

        txtTime.Text = "";

        txtPrice.Text = "";

    }

}

}

```

ManageMovie.aspx

```

<%@ Page Title="" Language="C#" MasterPageFile="~/Site1.Master" AutoEventWireup="true"
CodeBehind="ManageMovies.aspx.cs" Inherits="AP_LAB_PROJECT.ManageMovies" %>

<asp:Content ID="Content1" ContentPlaceHolderID="ContentPlaceHolder1" runat="server">

    <h2 class="text-center mb-4">🎬 Manage Movies</h2>

    <asp:GridView ID="GridView1" runat="server" CssClass="table table-dark table-striped">

    </asp:GridView>

</asp:Content>

```

ManageMovie.aspx.cs

```

using System;

```

```

using System.Collections.Generic;

using System.Linq;

using System.Web;

using System.Web.UI;

using System.Web.UI.WebControls;

using System.Data;

using System.Data.SqlClient;

using System.Configuration;

namespace AP_LAB_PROJECT
{
    public partial class ManageMovies : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            if (!IsPostBack)
            {
                LoadMovies();
            }
        }

        void LoadMovies(){
            string conn = @"Data Source=DESKTOP-6EE5ANN\MSSQLSERVER01;Initial
Catalog=MovieDB;Integrated Security=True";

            SqlConnection con = new SqlConnection(conn);

            con.Open();

            SqlDataAdapter da = new SqlDataAdapter("SELECT * FROM Movies", con);

            DataTable dt = new DataTable();

            da.Fill(dt);

            GridView1.DataSource = dt;


            GridView1.DataBind();

            con.Close();
        }
    }
}


```

Out Put


This is the home page

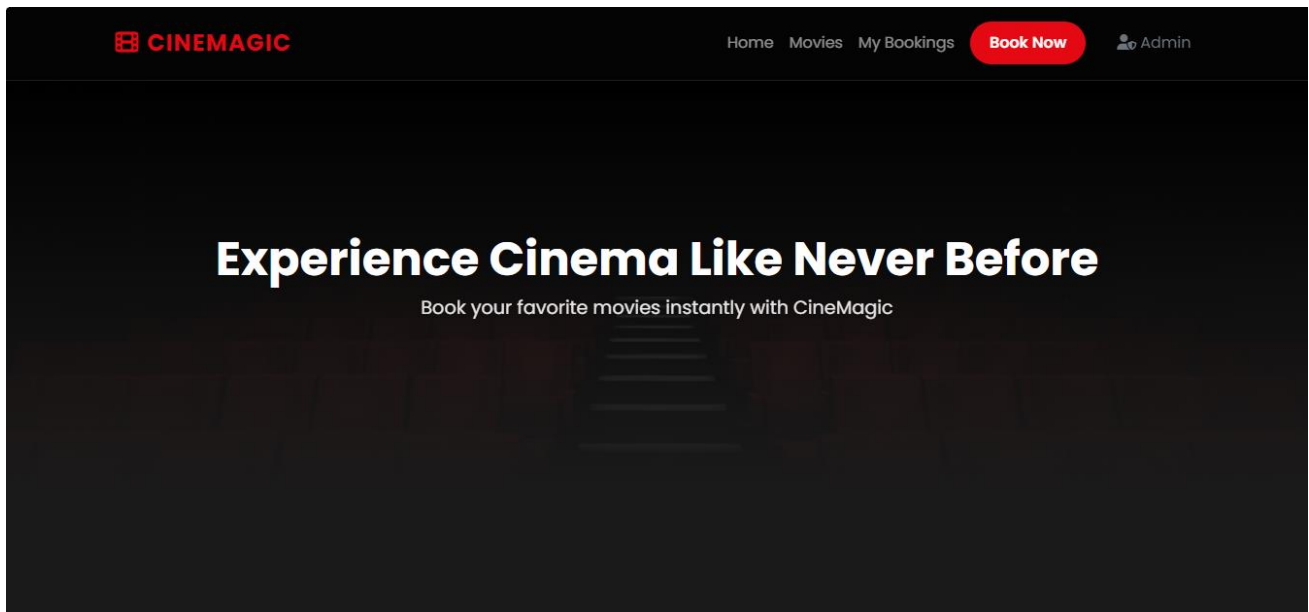

When user click on the admin button then admin have to enter the user name and password

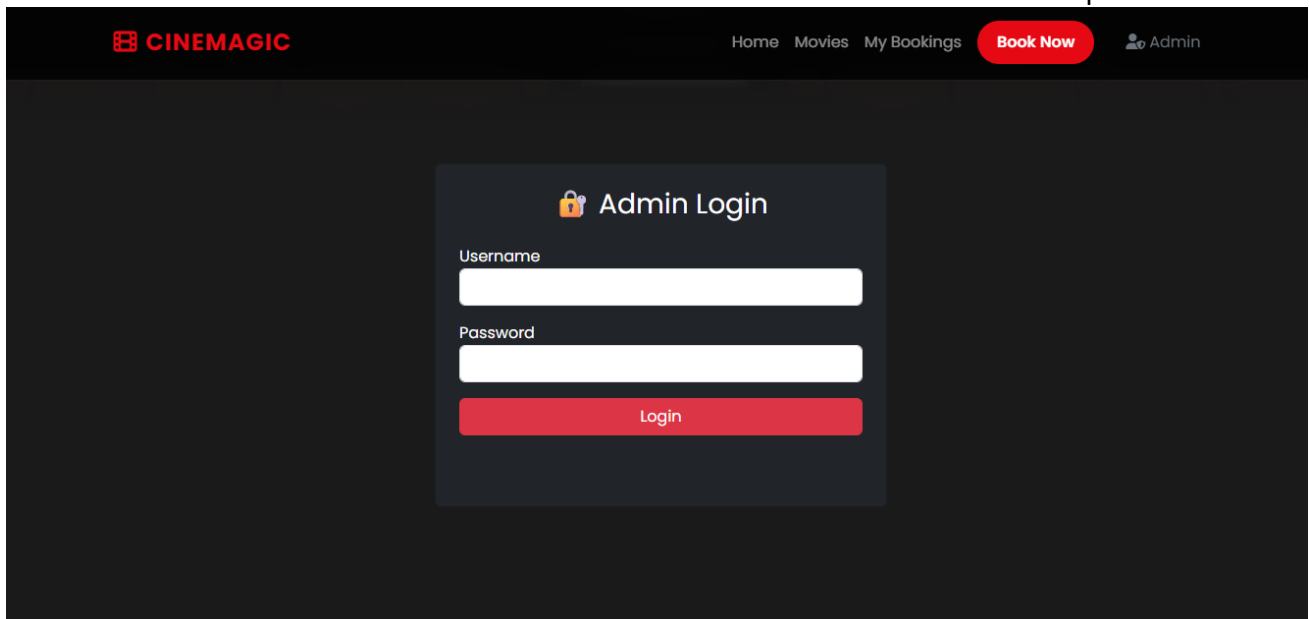


When user enter the correct password then this page will open

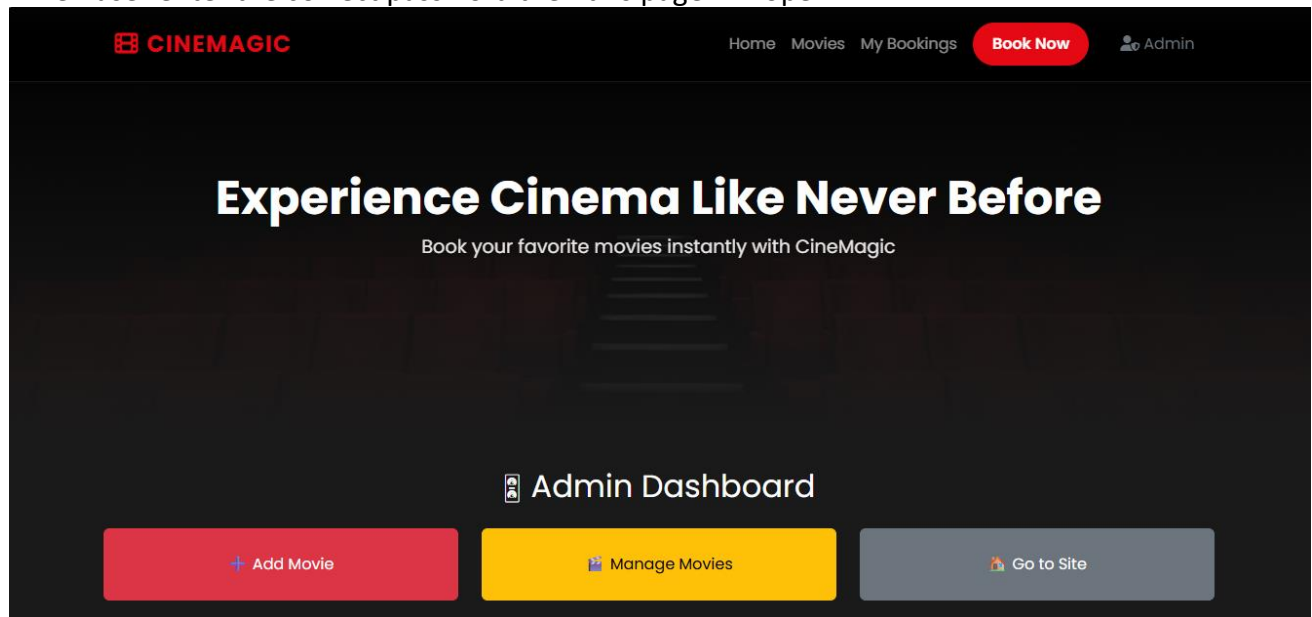


When admin click on go to site button then home page appear again

When user click on add movie then this will show from this form admin can add movie

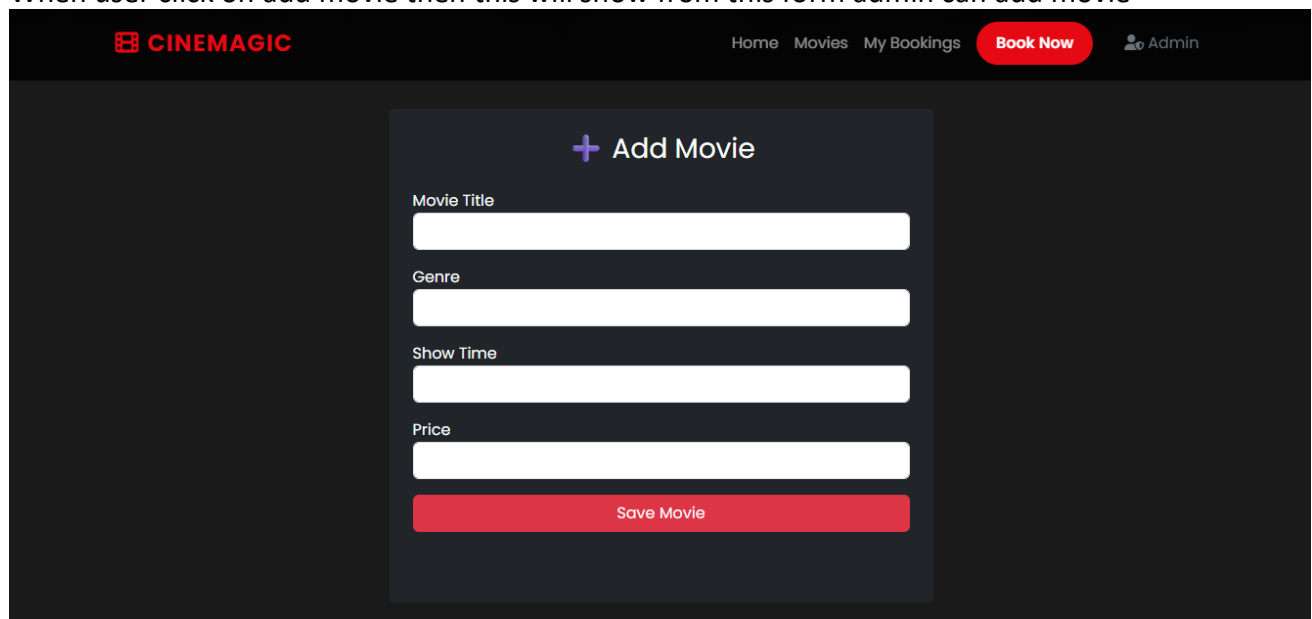


When user click on the manage movie button the all the movies that are added are shown

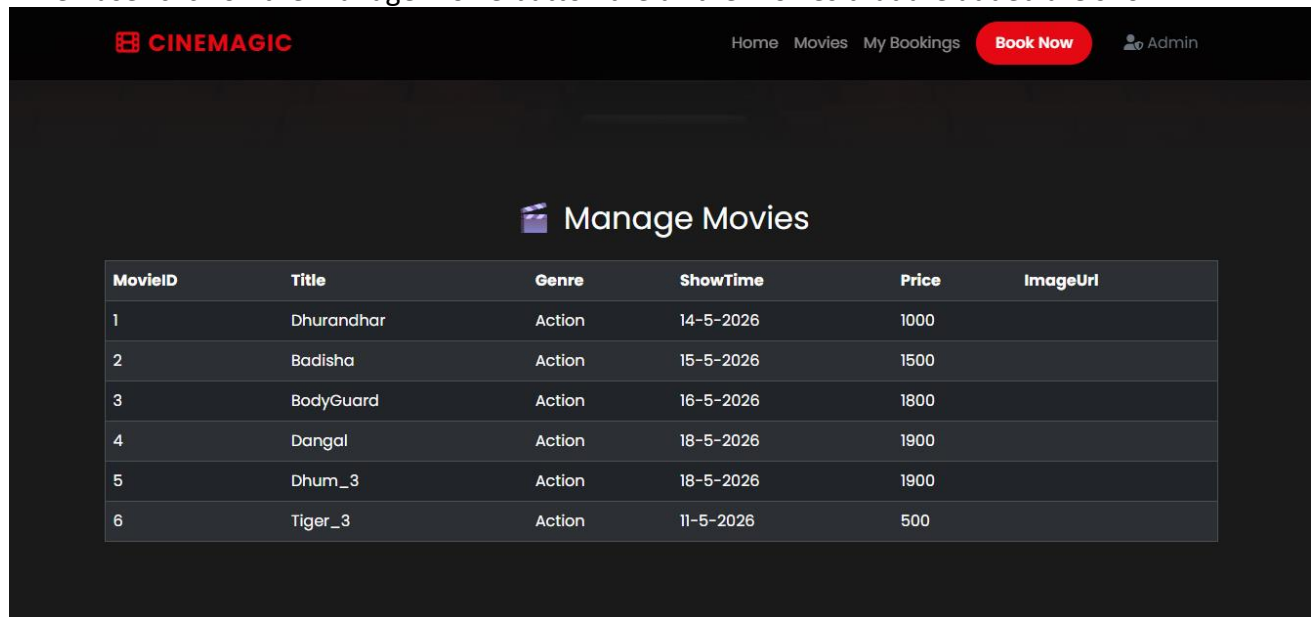

MovieID	Title	Genre	ShowTime	Price	ImageUrl
1	Dhurandhar	Action	14-5-2026	1000	
2	Badisha	Action	15-5-2026	1500	
3	BodyGuard	Action	16-5-2026	1800	
4	Dangal	Action	18-5-2026	1900	
5	Dhum_3	Action	18-5-2026	1900	
6	Tiger_3	Action	11-5-2026	500	

When user click on the movie from navigation bar then all the available movies show

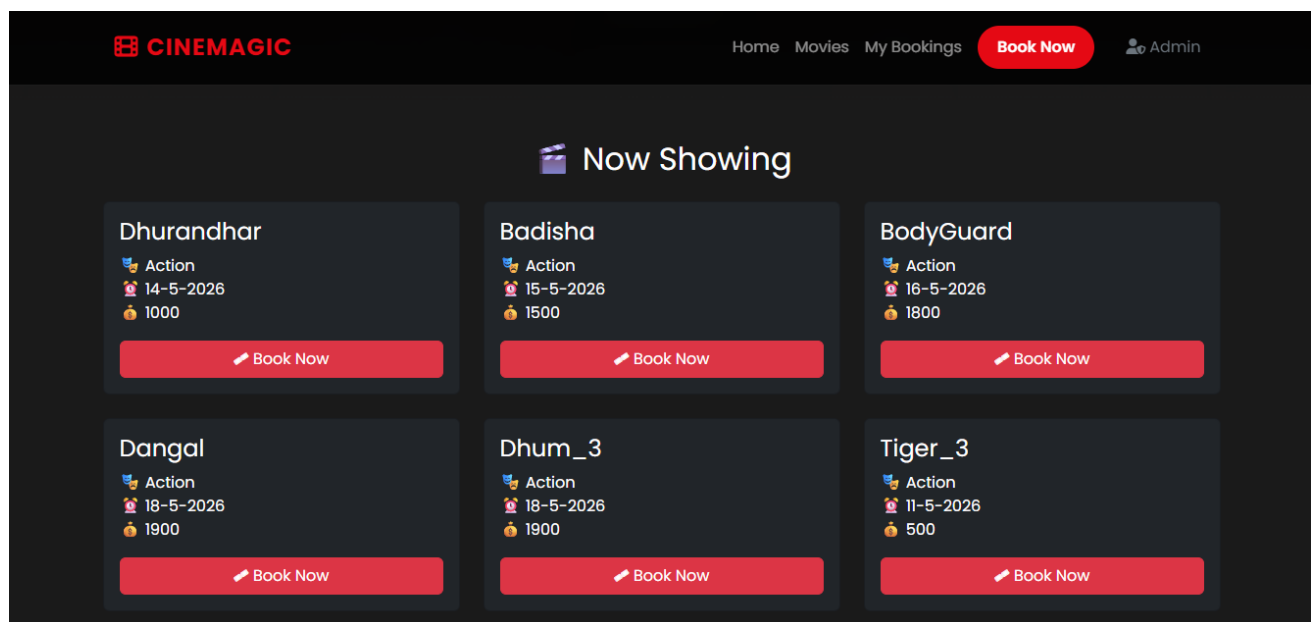

Now Showing

Dhurandhar

Action
14-5-2026
1000

Book Now

Badisha

Action
15-5-2026
1500

Book Now

BodyGuard

Action
16-5-2026
1800

Book Now

Dangal

Action
18-5-2026
1900

Book Now

Dhum_3

Action
18-5-2026
1900

Book Now

Tiger_3

Action
11-5-2026
500

Book Now

User can also verify that his ticket is booked or not by clicking on my booking on navigation bar

HomeMoviesMy BookingsBook NowAdmin

My Bookings

Enter Your Name

AhsanUllah

Search Bookings

Bookings Found 

BookingID	MovieID	CustomerName	Seats	BookingDate
1	5	AhsanUllah	1	5/18/2026 12:00:00 AM

Conclusion

The Movie Ticket Management System successfully demonstrates the use of ASP.NET Web Forms with SQL Server database integration. The system provides a simple and efficient way to manage movies and bookings. It can be further improved by adding authentication, payment integration, and seat selection features.