


Lecture 1: Operating Systems Basics



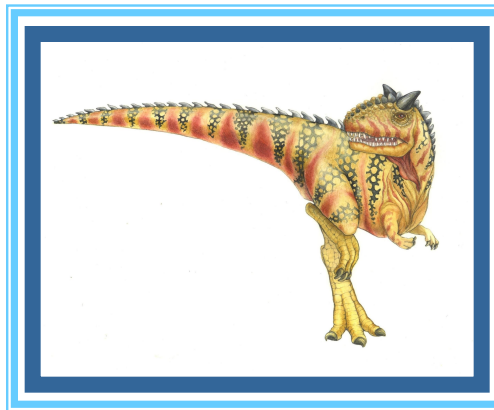

Chapter 1: Introduction

- What Operating Systems Do
- Computer-System Organization
- Computer-System Architecture
- Operating-System Structure
- Operating-System Operations
- Process Management
- Memory Management
- Storage Management
- Protection and Security
- Kernel Data Structures
- Computing Environments
- Open-Source Operating Systems





Objectives

- To describe the basic organization of computer systems
- To provide a grand tour of the major components of operating systems
- To give an overview of the many types of computing environments
- To explore several open-source operating systems






What is an Operating System?

- A program that acts as an intermediary between a user of a computer and the computer hardware
- Operating system goals:
 - Execute user programs and make solving user problems easier
 - Make the computer system convenient to use
 - Use the computer hardware in an efficient manner





Four Components of a Computer System

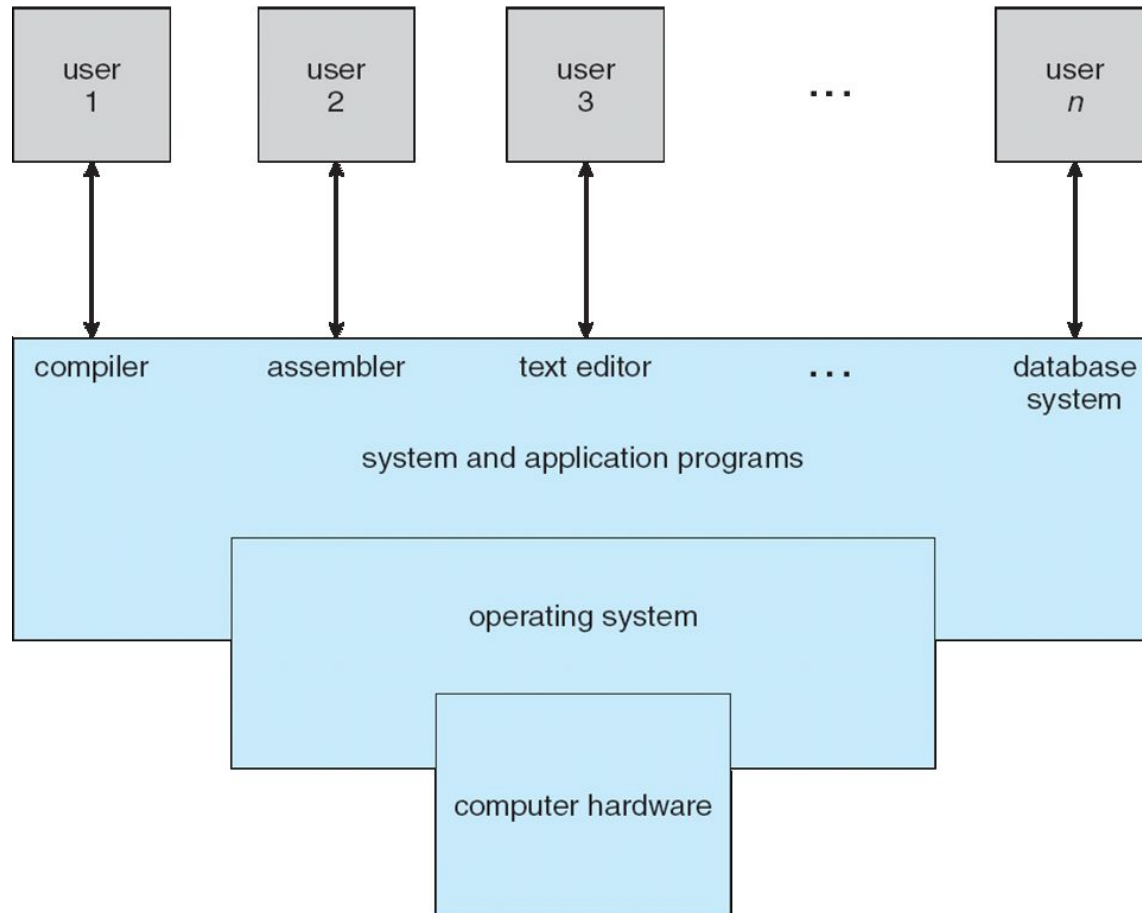



Computer System Structure

- Computer system can be divided into four components:
 - Hardware – provides basic computing resources
 - 4 CPU, memory, I/O devices
 - Operating system
 - 4 Controls and coordinates use of hardware among various applications and users
 - Application programs – define the ways in which the system resources are used to solve the computing problems of the users
 - 4 Word processors, compilers, web browsers, database systems, video games
 - Users
 - 4 People, machines, other computers





What Operating Systems Do

- Depends on the point of view
- Users want convenience, **ease of use** and **good performance**
 - Don't care about **resource utilization**
- But shared computer such as **mainframe** or **minicomputer** must keep all users happy
- Users of dedicate systems such as **workstations** have dedicated resources but frequently use shared resources from **servers**
- Handheld computers are resource poor, optimized for usability and battery life
- Some computers have little or no user interface, such as embedded computers in devices and automobiles





Operating System Definition

- OS is a **resource allocator**
 - Manages all resources
 - Decides between conflicting requests for efficient and fair resource use
- OS is a **control program**
 - Controls execution of programs to prevent errors and improper use of the computer





Operating System Definition (Cont.)

- No universally accepted definition
- “Everything a vendor ships when you order an operating system” is a good approximation
 - But varies wildly
- “The one program running at all times on the computer” is the **kernel**.
- Everything else is either
 - a system program (ships with the operating system) , or
 - an application program.





Computer Startup


- **bootstrap program** is loaded at power-up or reboot
 - Typically stored in ROM or EPROM, generally known as **firmware**
 - Initializes all aspects of system
 - Loads operating system kernel and starts execution





Computer System Organization

- Computer-system operation
 - One or more CPUs, device controllers connect through common bus providing access to shared memory
 - Concurrent execution of CPUs and devices competing for memory cycles

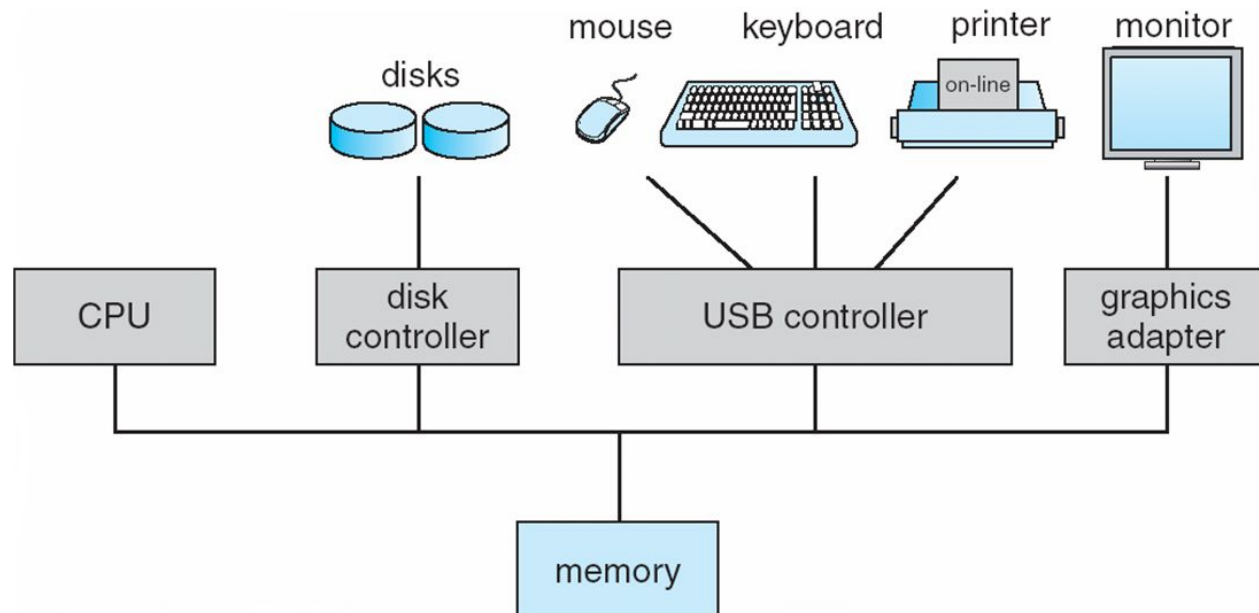



Computer-System Operation

- I/O devices and the CPU can execute concurrently
- Each device controller is in charge of a particular device type
- Each device controller has a local buffer
- CPU moves data from/to main memory to/from local buffers
- I/O is from the device to local buffer of controller
- Device controller informs CPU that it has finished its operation by causing an **interrupt**





Common Functions of Interrupts

- Interrupt transfers control to the interrupt service routine generally, through the **interrupt vector**, which contains the addresses of all the service routines
- Interrupt architecture must save the address of the interrupted instruction
- A **trap** or **exception** is a software-generated interrupt caused either by an error or a user request
- An operating system is **interrupt driven**





How Interrupt Works?

- When a user presses a key, the keyboard generates an interrupt.
- This interrupt signals the CPU to pause its current task, retrieve the keypress data from the keyboard buffer, and execute the appropriate response.
- **Interrupt Types:**
- **Hardware Interrupts:** Triggered by devices (e.g., keyboard, mouse, or network card).
- **Software Interrupts:** Generated by programs (e.g., requesting I/O operations).





How Interrupt Handling Works?

- **Interrupt Occurrence:**
- **CPU Response:**
- **Interrupt Service:**
- **Resume Execution:**






Interrupt Handling

- The operating system preserves the state of the CPU by storing registers and the program counter
- Determines which type of interrupt has occurred:
 - **polling**
 - **vectored** interrupt system
- Separate segments of code determine what action should be taken for each type of interrupt





Interrupt Timeline

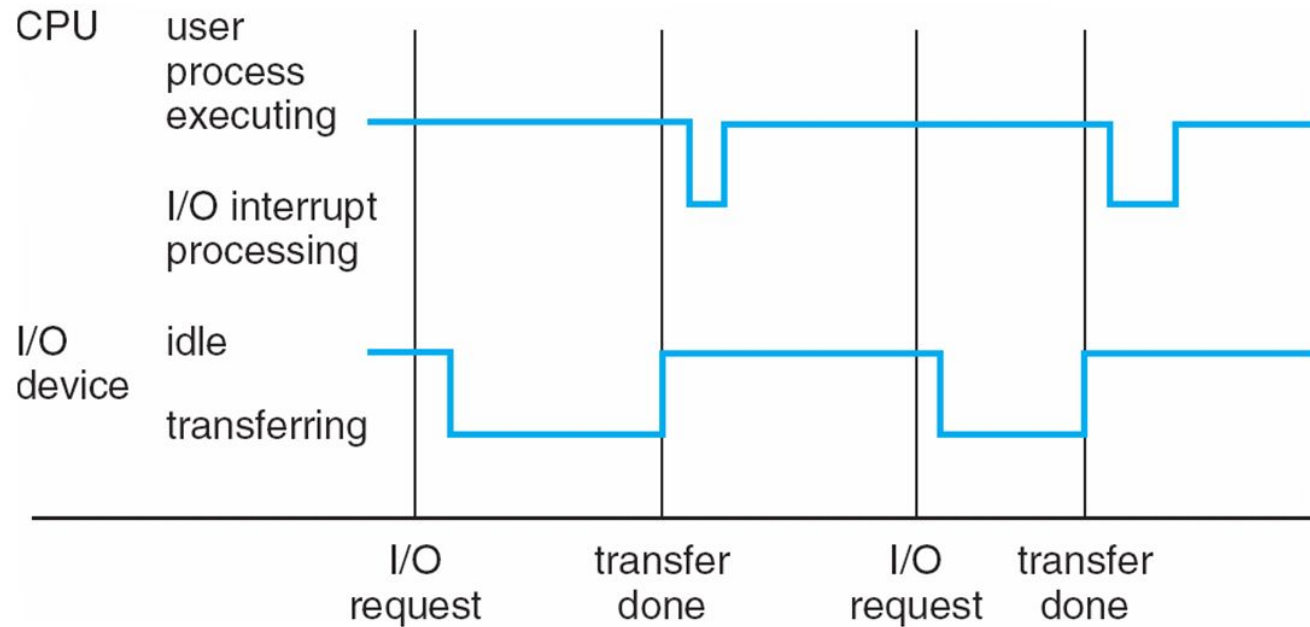

End of Lecture-1

