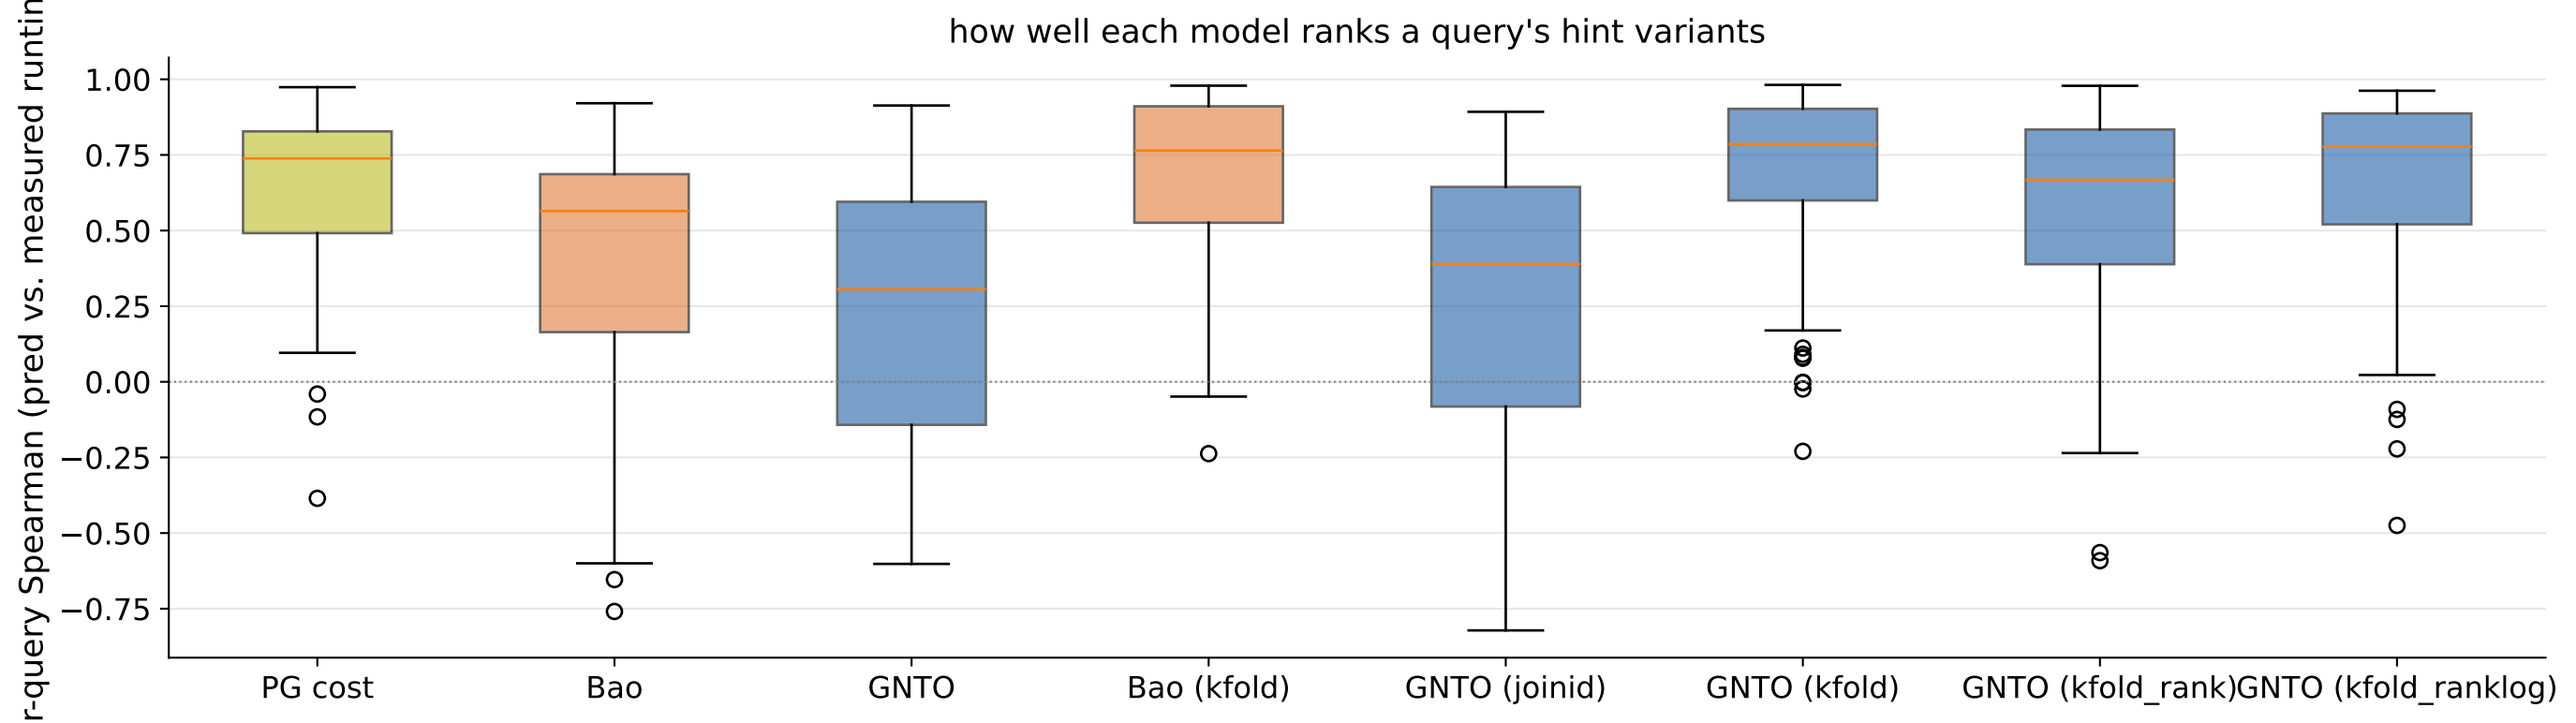
how well each model ranks a query's hint variants
r-query Spearman (pred vs. measured runtim
1.00
0.75
0.50
0.25
0.00
−0.25
−0.50
−0.75
PG cost
Bao
GNTO
Bao (kfold)
GNTO (joinid)
GNTO (kfold)
GNTO (kfold_rank)
GNTO (kfold_ranklog)