

오프라인 리턴

다음 단계에 따라 FlexNet 임베디드 라이선스를 반환합니다.


필수 확인 사항

1. Docking Station 사용 유무 확인 (Docking Station 제거 필요)
2. Activation ID의 유지보수 기간 확인 (아래 내용 참고)


수행 절차

1 단계:

1. ETAS License Manager를 실행합니다.
2. "Devices -> Settings" 로 이동하십시오.
3. Internet Proxy 의 Proxy Mode를 "None"으로 하십시오.

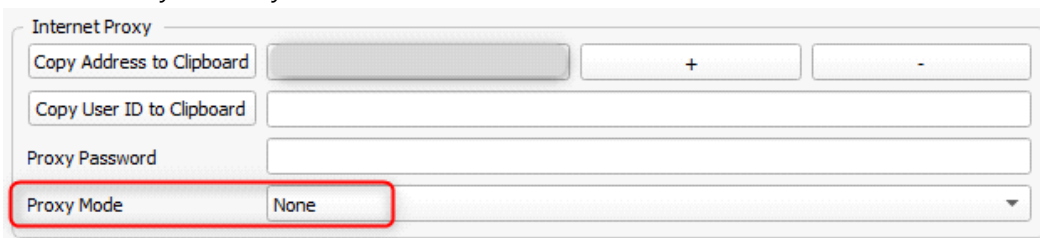


※ ETAS License Manager 에 "**Certificatie**" 버튼이 있는 경우, Proxy Mode 변경 후 "**Certificatie**" 실행 (최신 버전 ETAS License Manager 에는 "**Certificatie**" 버튼이 없습니다.)

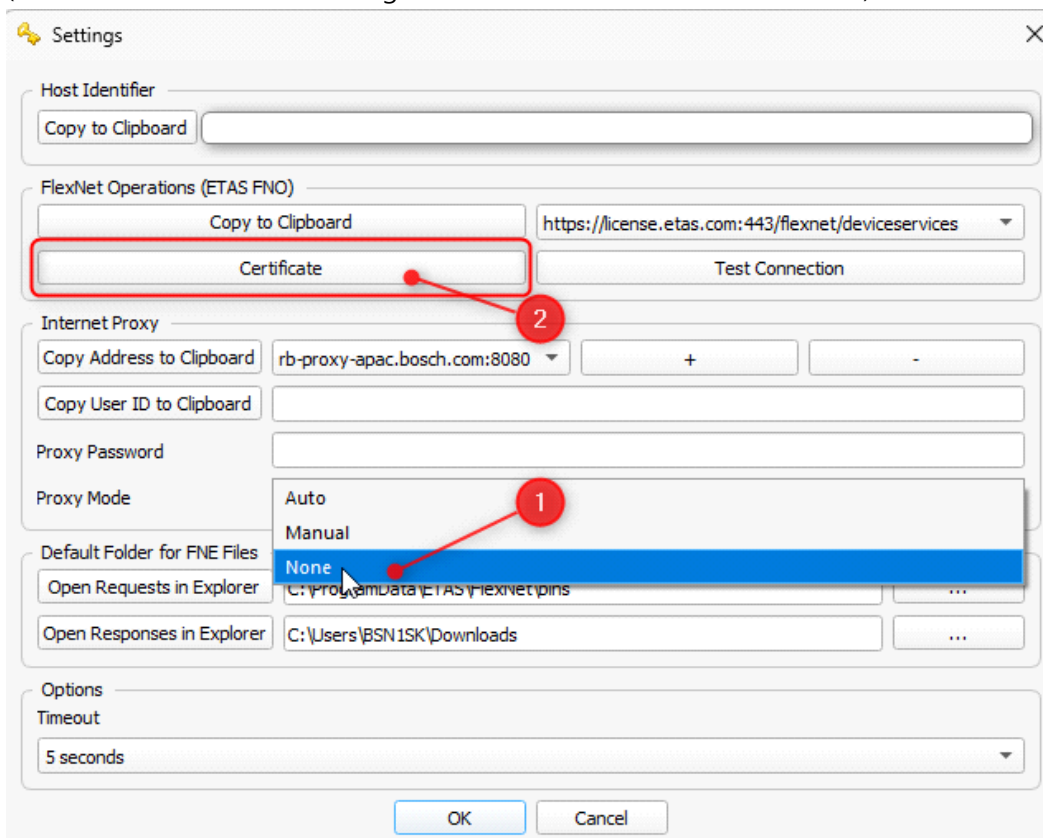

4. "Devices -> "Offline Return"으로 이동하십시오.
5. 입력 창에 원하는 기능의 Activation ID를 입력합니다.
6. "Ask for Return..."을 클릭하여 "*_return_request.bin" 파일을 생성합니다.


이 파일을 인터넷에 연결된 컴퓨터에 복사합니다.

1. 웹 브라우저에서 [ETAS License & Download Portal](https://license.etas.com) (<https://license.etas.com>) 엽니다.
2. Activation ID로 로그인
3. "Devices" 메뉴에서 "Upload Capability Request" 를 선택합니다.

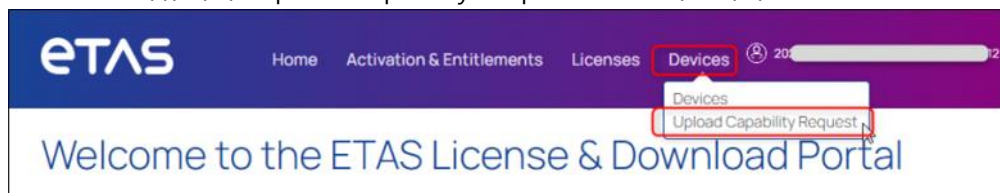

4. "파일선택"을 클릭하여 앞서 생성된 파일(*_return_request.bin)을 선택하십시오.


5. "Upload" 을 클릭합니다.
6. 성공하면 브라우저에서 파일을 다운로드하라는 메시지가 표시됩니다. (*Response.bin)




7. 이 파일(*Respense.bin)을 Offlien Reture을 요청한 컴퓨터로 가져오십시오.

2단계:

1. ETAS License Manager의 "Offline Return" 대화 상자에서 "Delete License..."를 클릭하십시오.
[ETAS License & Download Portal](https://license.etas.com) (<https://license.etas.com>)에서 다운로드한 파일(*Respense.bin)을 선택합니다.

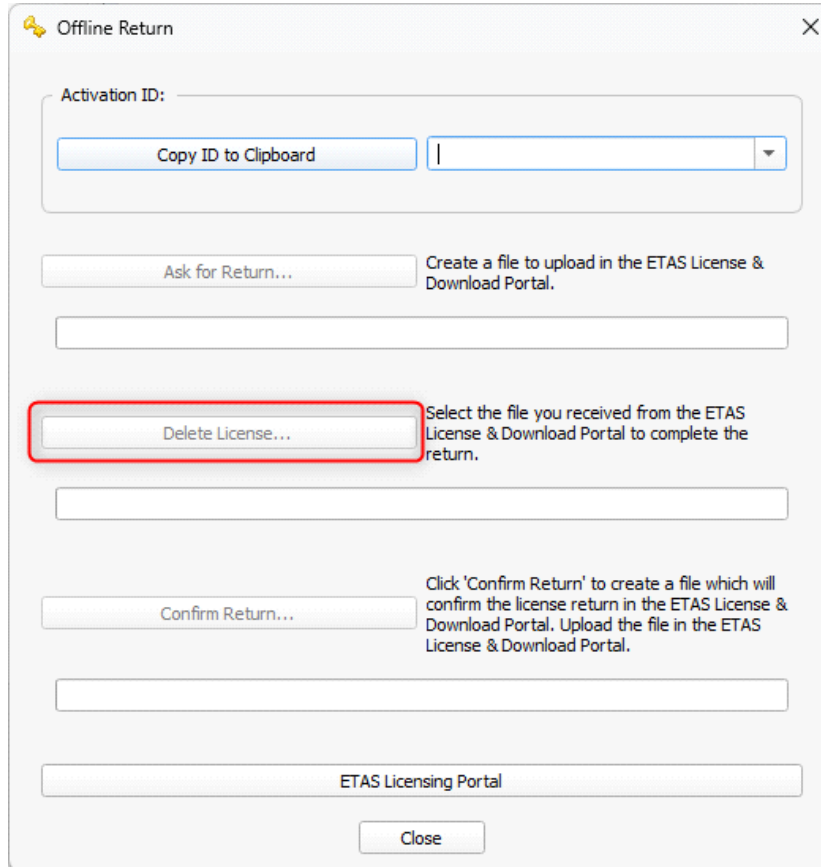


2. LiMa는 메시지 상자를 표시합니다.

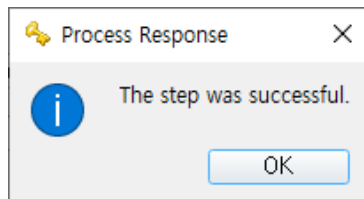

3 단계:

1. "Confirm Return..."버튼을 클릭하십시오.
2. ETAS License Manager는 "*_confirm_request.bin" 파일을 생성합니다.

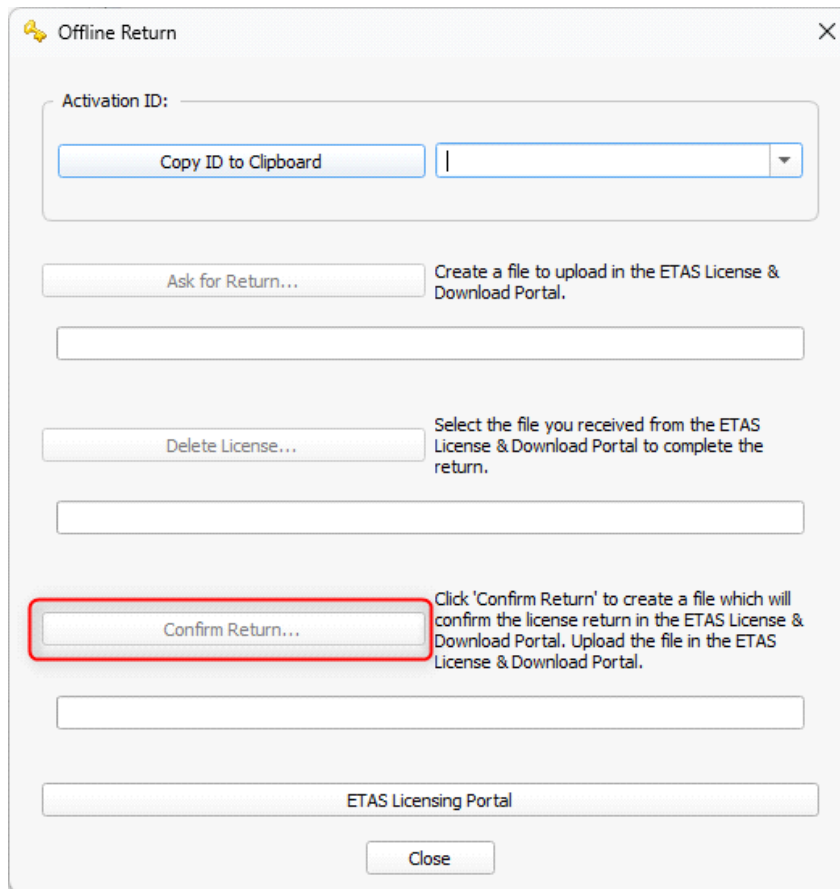

Offline Return

Activation ID:

Create a file to upload in the ETAS License & Download Portal.


Select the file you received from the ETAS License & Download Portal to complete the return.

Click 'Confirm Return' to create a file which will confirm the license return in the ETAS License & Download Portal. Upload the file in the ETAS License & Download Portal.

ETAS Licensing Portal

인터넷에 액세스할 수 있는 PC에서:

1. "Devices" 메뉴에서 "Upload Capability Request" 를 선택합니다.

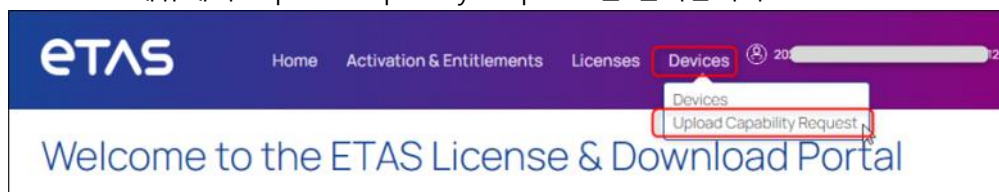

2. "파일선택"을 클릭하여 앞서 생성된 파일(*_confirm_request.bin)을 선택하십시오.




Upload Capability Request

Manually upload either a Capability Request or SynchronizationHistory Files for offline processing. The application will offer you a response file to download.

Upload type: ☒ Generate license ☐ File selection

선택된 파일 없음

3. "Upload" 을 클릭합니다.
4. 성공하면 브라우저에서 파일을 다운로드하라는 메시지가 표시됩니다.




5. 이 단계에서는 파일 다운로드는 필요하지 않습니다.
6. 이제 끝났습니다. 라이선스가 PC에서 제거됩니다.

※ ETAS License 유지보수 기간 확인

1. [ETAS License & Download Portal](https://license.etas.com) (<https://license.etas.com>)에 접속합니다.

- ① To maintain your Activation ID 선택
- ② Activation ID 입력
- ③ Login

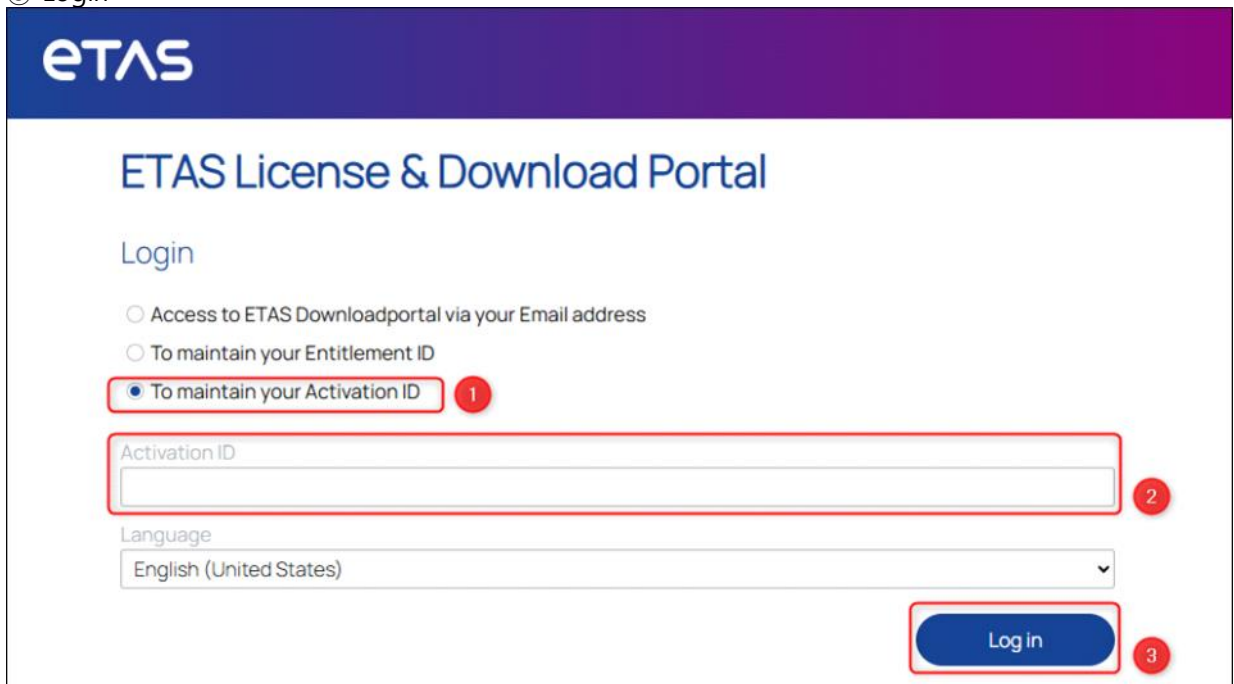


The screenshot shows the ETAS License & Download Portal login page. The ETAS logo is at the top left. The main heading is "ETAS License & Download Portal". Below it is the "Login" section. There are three radio buttons: "Access to ETAS Downloadportal via your Email address", "To maintain your Entitlement ID", and "To maintain your Activation ID". The third option is selected and circled with a red box and a red circle with the number 1. Below the radio buttons is a text input field for "Activation ID", which is also circled with a red box and a red circle with the number 2. Below the input field is a "Language" dropdown menu showing "English (United States)". At the bottom right is a blue "Log In" button, circled with a red box and a red circle with the number 3.


① Activation & Entitlements > List Entitlements



2. Maintenance 필드에서 Expiration 확인

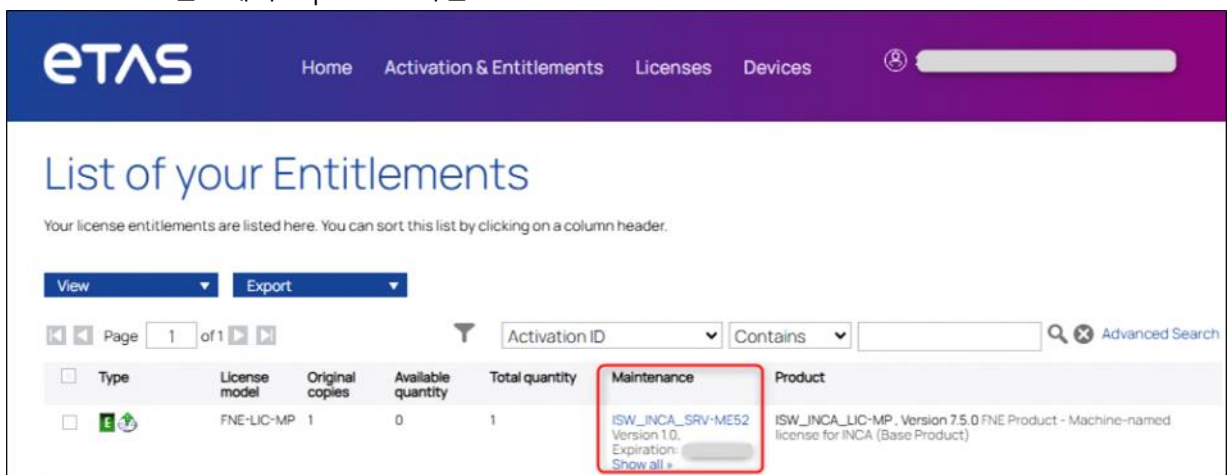

The screenshot shows the "List of your Entitlements" page. The ETAS logo is at the top left. The navigation bar includes "Home", "Activation & Entitlements", "Licenses", and "Devices". The "Activation & Entitlements" menu is highlighted. Below the navigation bar is the "List of your Entitlements" section. It includes a "View" dropdown menu, an "Export" button, and a "Page 1 of 1" indicator. There is a search bar with "Activation ID" and "Contains" filters. Below the search bar is a table with columns: "Type", "License model", "Original copies", "Available quantity", "Total quantity", "Maintenance", and "Product". The "Maintenance" column is circled with a red box. The table contains one row with the following data: "Type" is a green icon, "License model" is "FNE-LIC-MP", "Original copies" is "1", "Available quantity" is "0", "Total quantity" is "1", "Maintenance" is "ISW_INCA_SRV-ME52 Version 1.0. Expiration: Show all", and "Product" is "ISW_INCA_LIC-MP - Version 7.5.0 FNE Product - Machine-named license for INCA (Base Product)".

| Type | License model | Original copies | Available quantity | Total quantity | Maintenance | Product |
|---|---------------|-----------------|--------------------|----------------|---|---|
|  | FNE-LIC-MP | 1 | 0 | 1 | ISW_INCA_SRV-ME52 Version 1.0. Expiration: Show all | ISW_INCA_LIC-MP - Version 7.5.0 FNE Product - Machine-named license for INCA (Base Product) |