


Quickstart Guide



E-Smart Screen (ESS)

Display Your Vision Whenever, Wherever!

EwrTech Team- v0.1

ESS is page is under development. The content of will be updated.

Table of Contents

<u>Secontion 1: Introduction</u>	001
<u>Access - Login Info</u>	002
<u>Login to ESS (https)</u>	003
<u>Secontion 2: Content Types (Slides)</u>	007
<u>Web Page</u>	007
<u>Slideshow</u>	008
<u>QR - Text</u>	008
<u>Audio</u>	009
<u>Video</u>	010
<u>Image</u>	011
<u>Time (Scheduler)</u>	011
<u>Secontion 3: Settings</u>	012
<u>VPN and Remote Access</u>	012
<u>Change Your Password & 2FA</u>	013
<u>Set Monitor Resolution & Position</u>	013
<u>Power Saving - Suspend System</u>	014
<u>Connect to your Wifi</u>	014
<u>Apps (Additional Applications)</u>	015

Section 1: Introduction

What's ESS?

ESS allows you to display any type of content (images, videos, web pages, slide shows, audio files, and more) on your screen or TV at a specific time. You can schedule the contents to run on a specific date and select days of the week to run. The scheduler is highly flexible, you can schedule a slide to display throughout a period of time, a single time, recur daily, hourly, or run every second.

Some advanced features:

- Watch regular TV channel or listen to a radio
- Simple text to speech (natural voice)
- Can schedule voice reminders, or let it tell you the current time and weather
- Create QR and add them on top of your image
- Dual monitor support, schedules each monitor separately
- Advanced networking features, can serve as secure Hotspot or a VPN

You can consider ESS as an **advanced digital signage with a lot more features and capabilities.**

In addition, you can add extra EWR applications and use them as Add-ons along side with ESS.

The ESS Bundle version includes:


- **E-Pad** (PC Mode)
- **E-Share** (Screen Sharing)

The core features don't require internet connection and supports both x86-64 and arm64 cpu architecture.


Access - Login Info

There are multiple ways to access the ESS system, via Ethernet, USB, and the hotspot if your ESS device's Wifi card support the Access-Point mode.
The device turns to a hotspot when it's not connected to any Wifi / Access Points.

To connect to the device directly, search for the default ESS hotspot SSID.

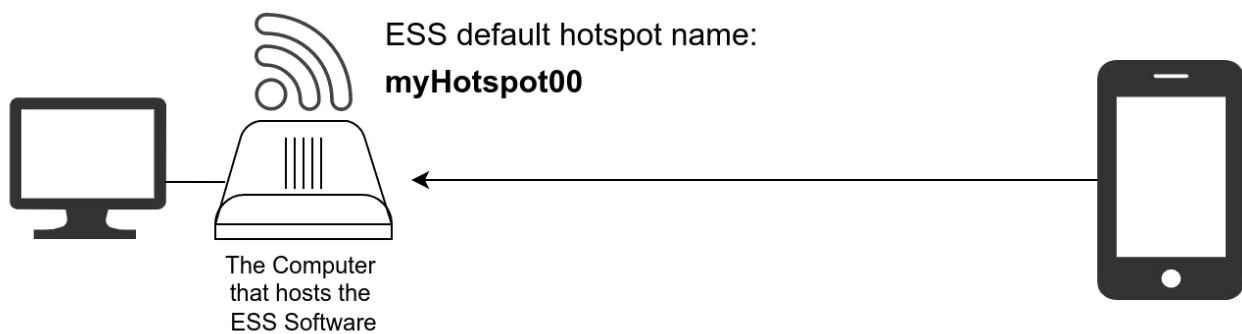

Once you connect to the ESS device via hotspot, you can then connect the ESS device to your own Wifi:

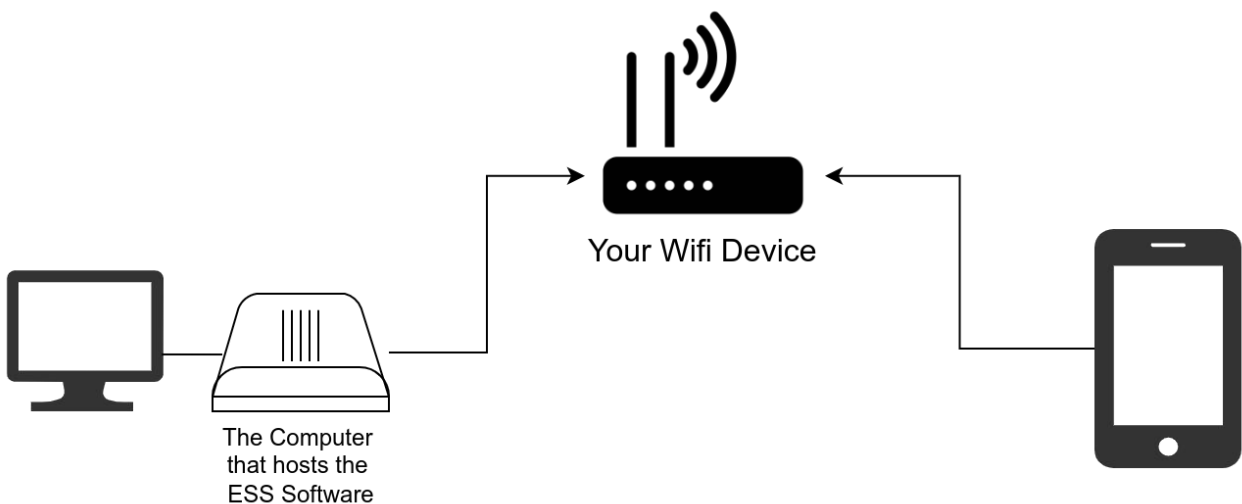

Steps:

- 1- Connect your monitor or TV to the ESS device
- 2- Turn on your monitor and set the output source accordingly
- 3- Connect the power adapter to the ESS device. If the device is set to **auto-power**, it will turn on automatically as soon as you plug into the power source. Otherwise, press the power button to turn it on
- 4- Once the device is turned on, **wait 5 to 10 minutes** for the initial configuration
- 5- By default, the device is set to the Hotspot mode for easy access. Connect to it directly just like when you connect to a regular Access Point / Wifi device
- 6- Use your laptop or phone to connect to the device, ESS default hotspot by scanning the Wifi:

Default Hotspot SSID : **myHotspot00**

Default Wifi Password: **myHSPass_99**


Once you are connected to the **myHotspot00** Wifi, you can now access the ESS system using your web browser
Note: the hotspot only works for the device with Wifi card that support Access-Point mode.

Login to ESS (https)


A- Open your browser and type the default ESS IP Address:

https://10.42.0.1:9001 (must type https://)

You will get a security warning, similar to this: (depending on your browser)

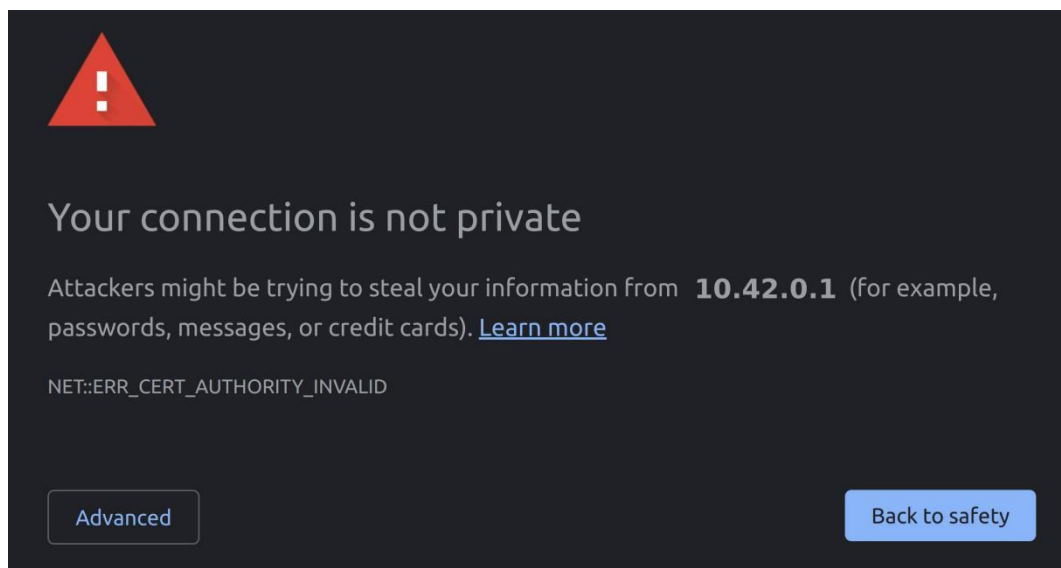

You will see this because ESS uses a “**Self Signed Certificate**” so you can use the system on your private network. This is safe, **Cisco** and **Google** use Self Signed Certs for systems that require to work without a FQDN. To learn more, see the official page: https://en.wikipedia.org/wiki/Self-signed_certificate
- Click on “**Advanced**” (based on your browser, just look for continue or proceed)

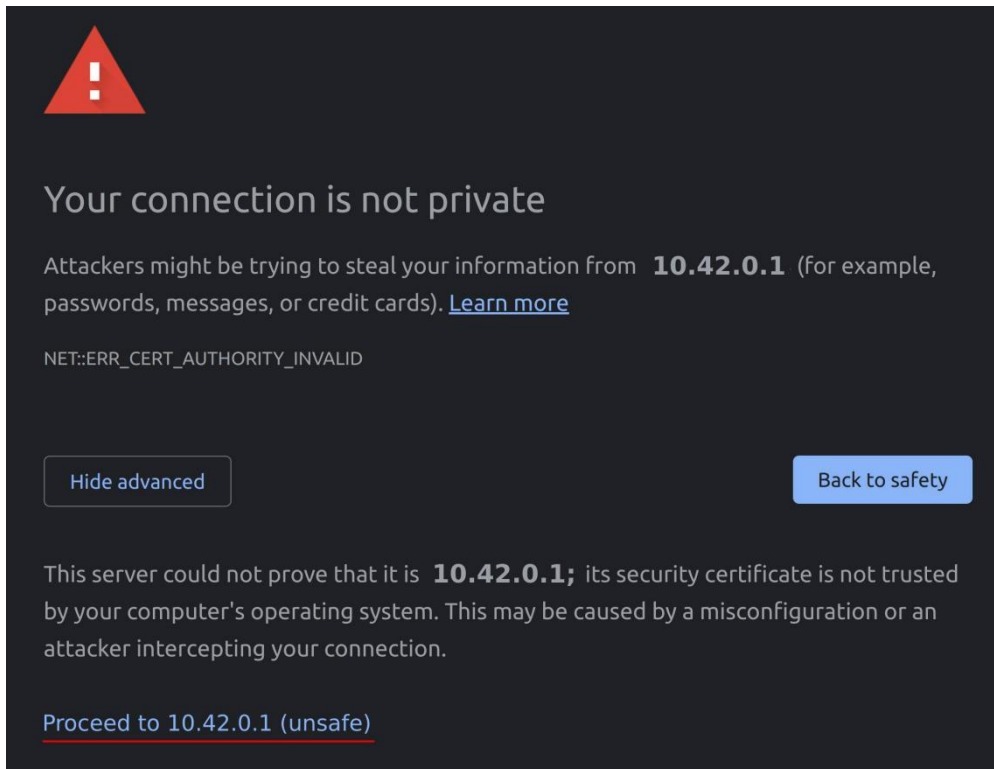

- Click on "Proceed to 10.42.0.1 (unsafe)"



ESS

@

Username

🔒

Password

Login

Default Username:

admin


Default Password:

Admin@123


- We need to pass the **2FA**. You must install a **2-Step Authentication App** on your phone. There are many, we recommend **Google Authenticator**. You can find it in your App Store.



B- Open **Google Authenticator** and scan the QR Code below:

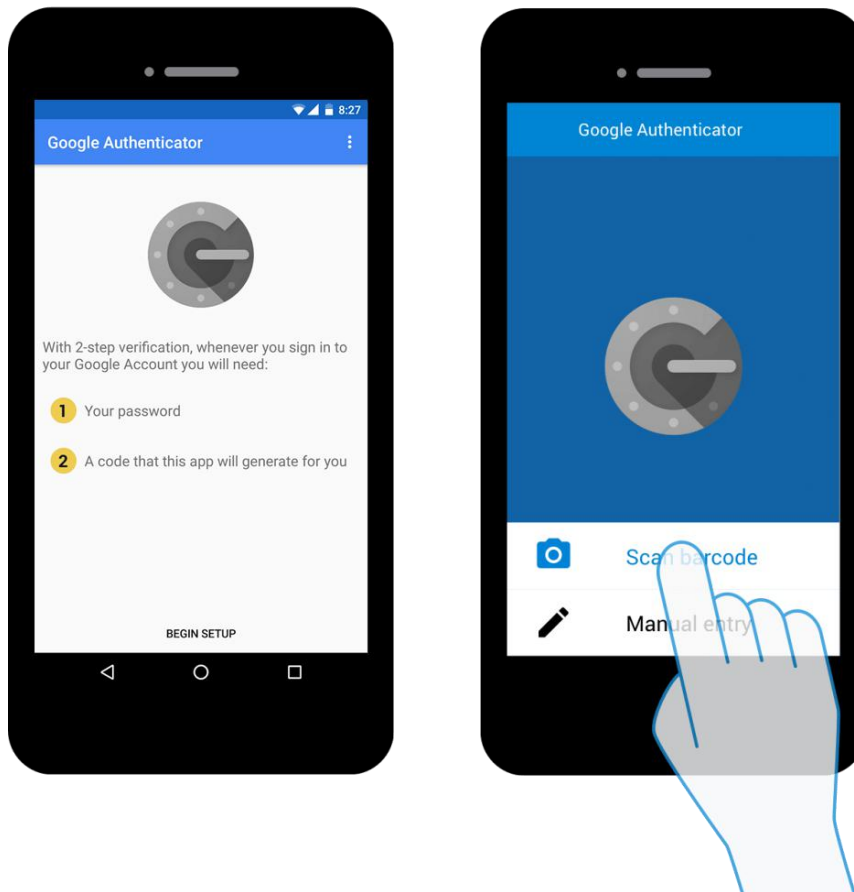

Optionally, you can add the 2FA code to **Google Authenticator** manually if you need to:
NEASXACZ4YOTOPU6XUZCRCFXZY23ZOV



2FA

Verify


The code changes every **30 seconds**

If you have any issues connecting to the device or logging in, please feel free to contact us.

Section 2: Content Types (Slides)

Almost anything you can display on your regular PC screen or an audio file or link you can play is considered a content for ESS.

For example, you can upload an image from your computer or phone to schedule and display it on either the first or the second monitor, display a public web page, play audio or a YouTube link, create a QR code, watch TV, set time reminders, and more. Here's a list of contents:

After you login, click on the  plus sign to add a new slide. Then select the content type:

Select Content Type:

Select content to display ▼

Go Back

Web Page

Image

Video

Audio

Slideshow

QR - Text

- Web Page

Allows you to schedule and display a publicly or locally available link using any standard protocol, and optionally set a refresh time.

The Web Page slide's minimum time is 5 minutes and the refresh minimum is 15.

Monitor 1 - Configure Web Page Slide :

Start Date:	Start Time:
<input type="text" value="mm/dd/yyyy"/>	<input type="text" value="--:-- --"/>
End Date:	End Time:
<input type="text" value="mm/dd/yyyy"/>	<input type="text" value="--:-- --"/>
Week Days:	<input checked="" type="checkbox"/> <u>S</u> <input checked="" type="checkbox"/> <u>M</u> <input checked="" type="checkbox"/> <u>T</u> <input checked="" type="checkbox"/> <u>W</u> <input checked="" type="checkbox"/> <u>Th</u> <input checked="" type="checkbox"/> <u>F</u> <input checked="" type="checkbox"/> <u>Sa</u>

☐ Ignore URL and only use failover page

Refresh	<input type="text" value="minimum 15 minutes"/>
URL	<input type="text" value="https://example.com/page1.html"/>

OFFLINE USE

☒ Use "Site is not reachable"

Upload HTML Site (.zip) ⓘ

Choose File	No file chosen
-------------	----------------

Name:	<input type="text" value="Slide name defined by user"/>
-------	---

Go Back

Save

- Slideshow

You can combine photos and videos to create a slideshow and run it based on the schedule you create.

Monitor 1 - Configure Slideshow Slide :

Start Date:

mm/dd/yyyy

Start Time:

--:-- --

End Date:

mm/dd/yyyy

End Time:

--:-- --

Week Days:

S

M

I

W

Th

F

Sa

Upload Images/Video (jpg,png,gif,mp4,avi | <= 1G)

Choose Files

No file chosen

☐ Vertical

☐ Priority

☒ Loop

Slide Duration:

1

Seconds

Text:

Optional

Name:

Slide name defined by user

☐ Mute

Go Back

Add

- QR - Text

Allows you to generate a QR code / link and add it on top of your photos, then display it based on the schedule you create. You can also display text.

Add QR slide

- ☒ Display QR Code with Image
- ☐ Display Text - No QR Code

Cancel

Previous

Next

Add QR slide

Monitor 1 - Configure QR Slide :

Start Date:

mm/dd/yyyy

Start Time:

--:-- --

End Date:

mm/dd/yyyy

End Time:

--:-- --

Week Days:

S

M

I

W

Th

F

Sa

☐ Priority

Text:

Title Text - Optional

Name:

Slide name defined by user

Cancel

Next

- Audio

You can schedule to an audio file, listen to the radio or podcast, or use the **Text-to-Speech** feature with commonly used keywords such as **TIME**, **WEATHER**, and **DATE**.

Monitor 1 - Configure Audio Slide :

Start Date:
mm/dd/yyyy

Start Time:
--:-- --

End Date:
mm/dd/yyyy

End Time:
--:-- --

Week Days:
S **M** **T** **W** **Th** **F** **Sa**

☐ Text to speech

☐ Live Audio

☐ Loop

Upload Audio (mp3 | <= 6MB)

Choose File

No file chosen

Name: Slide name defined by user

Go Back

Save

Monitor 1 - Configure Audio Slide :

Start Date:
mm/dd/yyyy

Start Time:
--:-- --

End Date:
mm/dd/yyyy

End Time:
--:-- --

Week Days:
S **M** **T** **W** **Th** **F** **Sa**

☒ Text to speech

☐ Live Audio

☐ Loop

Time Gap (Seconds): 1

i

Text

i

Example - Keywords

Name: Slide name defined by user

Go Back

Save

- Video

Allows you to schedule and play a TV channel, upload your own video file, YouTube, IP Camera, and more.

If you try to add two video slides to run on the same monitor / Display, and set the time for both slides to run at the same time or overlap, the system will require you to change the time of the slides to prevent playing two videos on the same monitor at the same time.

Monitor 1 - Configure Video Slide :

Start Date:	Start Time:
<input type="text" value="mm/dd/yyyy"/>	<input type="text" value="--:-- --"/>
End Date:	End Time:
<input type="text" value="mm/dd/yyyy"/>	<input type="text" value="--:-- --"/>
Week Days:	<u>S</u> <u>M</u> <u>T</u> <u>W</u> <u>Th</u> <u>F</u> <u>Sa</u>

☐ Use URL

Upload Video (mp4,avi | <= 1G)

☐ Vertical ☐ Priority **i**

☐ Mute

Monitor 1 - Configure Video Slide :

Start Date:	Start Time:
<input type="text" value="mm/dd/yyyy"/>	<input type="text" value="--:-- --"/>
End Date:	End Time:
<input type="text" value="mm/dd/yyyy"/>	<input type="text" value="--:-- --"/>
Week Days:	<u>S</u> <u>M</u> <u>T</u> <u>W</u> <u>Th</u> <u>F</u> <u>Sa</u>

☒ Use URL

☐ Vertical ☐ Priority **i**

☐ Mute

- Image

Schedule and display any format of image, commonly used for display restaurant menus that change at certain times.

Monitor 1 - Configure Image Slide :

Start Date:

mm/dd/yyyy

Start Time:

--:-- --

End Date:

mm/dd/yyyy

End Time:

--:-- --

Week Days:

☒ **S**

☒ **M**

☒ **T**

☒ **W**

☒ **Th**

☒ **F**

☒ **Sa**

Upload Image (png,jpg | <= 6MB)

Choose File

No file chosen

☐ Vertical

☐ Priority **i**

Text:

Optional

Name:

Slide name defined by user

Go Back

Save

Time (Scheduler)

When you add a new slide, you will see three options for time. You can select the one that best suits your scheduling needs.

Daily:

This is the most commonly used scheduling type, you can start and end the slide at specific times and dates, and also select the days of the week.

Hourly:

Schedule the slide to run at a specific **minute** of the hour, and start and end at a specific date.

Period:

This is suitable to run through out a long period of time without stopping. If you want to run a slide for more than 24 hours continuously, this will be the most suitable.

Add a new slide

Time & Output

Daily

Display 01

Daily
Hourly
Period

Select Content Type:

Select content to display

Go Back


Add

Secontion 3: Settings

You can change the display resolution, set a standby time, configure the VPN remote access, and much more under the settings menu.


Click on the gear icon  located on the top right corner:

Most of the settings are self explanatory.
Some features need additional clarification:

- General
- Network
- User
- Display
- System
- Emergency
- Support
- Upgrade
- About
- Facory Reset
-  Power

VPN and Remote Access

We support all major VPNs, both software and hardware based. We recommend the highly secure and scalable VPN called ZeroTier, but other options we provide are just as good. It depends on your requirments and needs. With a click of a button, you can install and configure the VPN to have secure remote access to your device.

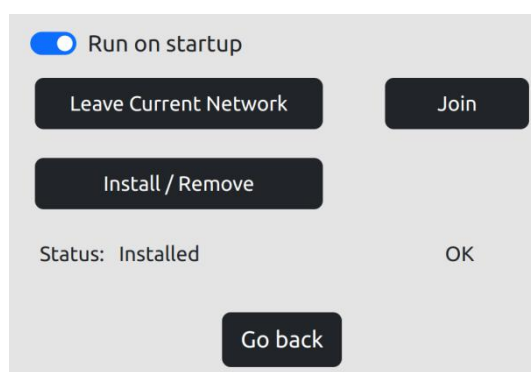

Change Your Password & 2FA

There are multiple users you can change your password and 2FA code at anytime.

User Settings

Admin ▾

User Settings

.....

i

Generate new 2FA QR

Scan With The Authenticator App



Download QR (Backup)

i

Go back

Update

Set Monitor Resolution & Position

You can configure dual monitors, change a monitor to vertical, and more. Go to the **Setting Menu**, click on **Display**

Click on the button **Resolution** and select the pre-configure profile settings.

The default profile works for most monitors.

Resolution

Hardware Info

Rotate

⏻ Power TV

Current Status

Identify

Learn More

Save Config

Power Saving - Suspend System

You can schedule to turning off the monitors or schedule suspending the entire system.

Suspend System

☐ Disabled

Schedule

Learn More

Logs

up 3 hours, 25 minutes

WARNING!
You will not be able to access the system when it's suspended.











Connect to your Wifi

By default, the ESS creates a hotspot for you to connect to it directly. Once you are connected, you can then connect to another Wifi, and when the Wifi you have connected to is no longer available, it will fall back to the hotspot so you don't lose access.

Go to the **Setting Menu**, click on **Network** then click on the button: **Set Wifi**

Set Wifi 





Kingscastle

ATTHdvustA

SpectrumSetup-30

black

ATTp2KmVnW

SpectrumSetup-E5

NO FREEBIES

NO FREEBIES 2

patti's

Jasper69

Enter SSID

Go Back

Continue


Apps (Additional Applications)


EwrTech has many software products, a couple of them are bundled with the standard ESS version, the **E-Share** and **E-Pad**.


E-Share allows you to easily share your screen with the monitors connected to the device, or send invite links for sharing your screen. You can also use a webcam and stream a video file directly from your phone.


E-Pad simply turns the system into a standard PC that you can use as a web browser, or do anything else when you use a Linux Desktop PC. You can use your phone or any other device as a virtual keyboard and mouse to interact with the system.


For more information, please check the user manuals for the specific product you are interested in.

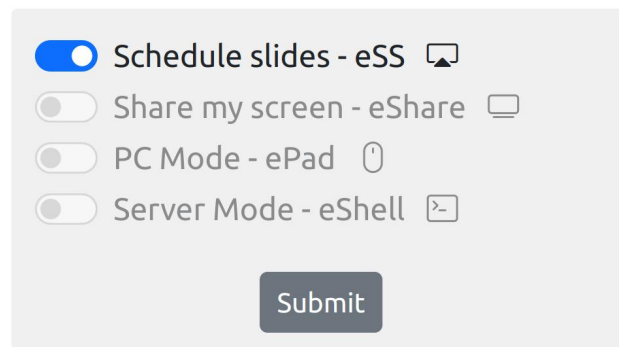

☒ Schedule slides - eSS 

☐ Share my screen - eShare 

☐ PC Mode - ePad 

☐ Server Mode - eShell 

Note:

ESS software is still in the development stage. This a basic help document and will change in the future.

We provide other methods to access the system: USB, Ethernet, and VPN.
If you encounter any issue or need help please feel free to contact us:

<https://www.ewrtech.com/>

Toll Free: +1 (833) 830-0330

© EwrTech LLC - USA - ESS v0.1