


COURSE CODE/TITLE:	CPE212 Automating Server Management	SECTION:	CPE31S2
DATE PERFORMED:	07/23/2026	DATE SUBMITTED:	07/23/2026
NAME:	Aicon H. Keliste	INSTRUCTOR:	Engr, Jimlord Quejado

ACTIVITY NO. 3.1 Install SSH server on CentOS or RHEL 8

1. PROCEDURE OUTPUT

Task 1:

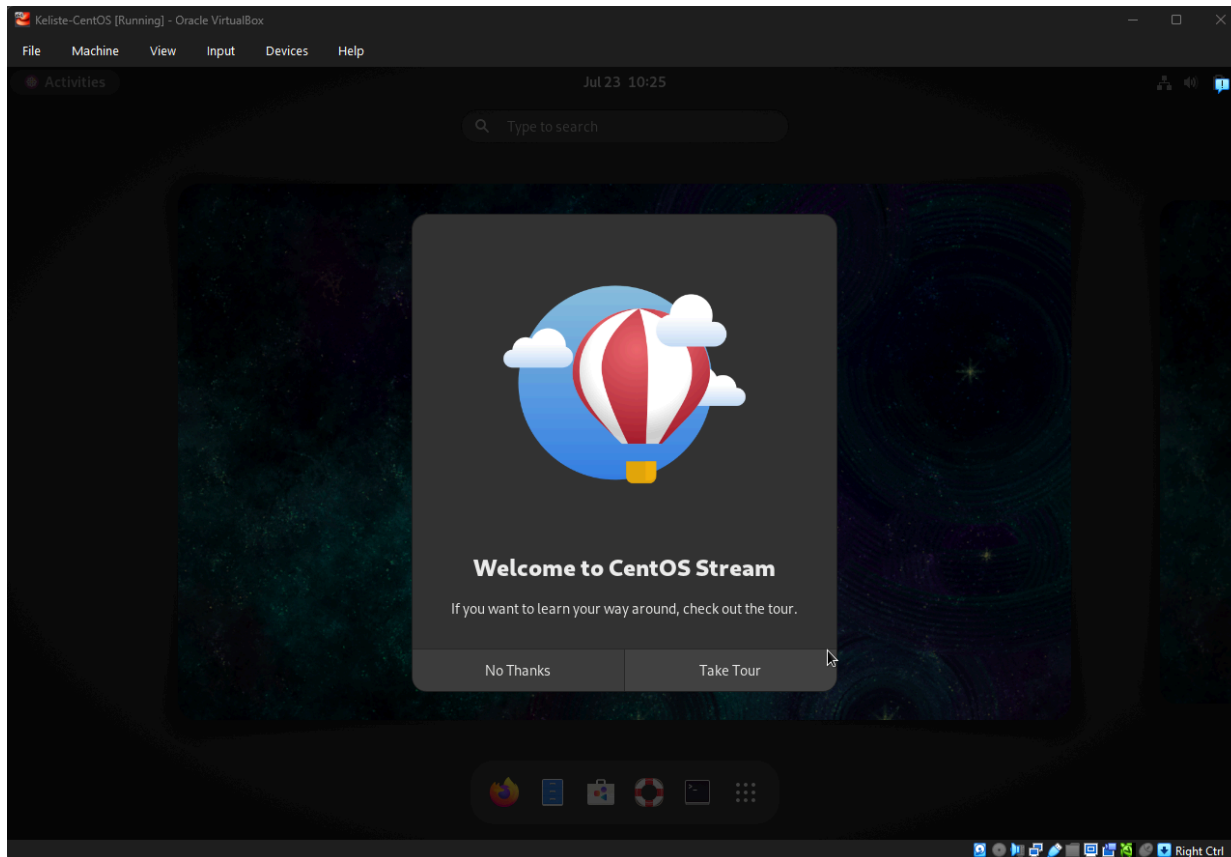

Task 2:

```
[keliste-centos@localhost ~]$ sudo systemctl status sshd
● sshd.service - OpenSSH server daemon
   Loaded: loaded (/usr/lib/systemd/system/sshd.service; enabled; preset: ena>
   Active: active (running) since Thu 2026-07-23 10:38:28 PST; 10min ago
     Docs: man:sshd(8)
           man:sshd_config(5)
   Main PID: 915 (sshd)
    Tasks: 1 (limit: 10502)
   Memory: 2.1M (peak: 2.4M)
      CPU: 20ms
   CGroup: /system.slice/sshd.service
           └─915 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Jul 23 10:38:28 localhost.localdomain systemd[1]: Starting OpenSSH server daemo>
Jul 23 10:38:28 localhost.localdomain sshd[915]: Server listening on 0.0.0.0 po>
Jul 23 10:38:28 localhost.localdomain sshd[915]: Server listening on :: port 22.
Jul 23 10:38:28 localhost.localdomain systemd[1]: Started OpenSSH server daemon.
lines 1-16/16 (END)
```

```
[keliste-centos@localhost ~]$ sudo firewall-cmd --zone=public --permanent --add-service=ssh
[sudo] password for keliste-centos:
Warning: ALREADY_ENABLED: ssh
success
[keliste-centos@localhost ~]$ firewall-cmd --reload
success
[keliste-centos@localhost ~]$ /etc/ssh/sshd_config
bash: /etc/ssh/sshd_config: Permission denied
[keliste-centos@localhost ~]$ sudo /etc/ssh/sshd_config
sudo: /etc/ssh/sshd_config: command not found
[keliste-centos@localhost ~]$ /etc/ssh/sshd-config
bash: /etc/ssh/sshd-config: No such file or directory
[keliste-centos@localhost ~]$ sudo nano /etc/ssh/sshd_config
[keliste-centos@localhost ~]$ sudo nano /etc/ssh/sshd_config
[keliste-centos@localhost ~]$ sudo nano systemctl reload
[keliste-centos@localhost ~]$ sudo systemctl reload
Too few arguments.
[keliste-centos@localhost ~]$ sudo systemctl reload
Too few arguments.
[keliste-centos@localhost ~]$ sudo systemctl reload sshd
[keliste-centos@localhost ~]$
```

Task 3:

```
[keliste-centos@localhost ~]$ cat ~/.ssh/authorized_keys
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQDJNqG3CVX0sIe+zKzBLfDv8DQ01vwRWABkjDNEdstR
4+7v9p0k+uINC6Yct0PcAhDes2ySLu84iAXi+PmEODkkdeUt3se66bZGMAjTtbeZag+UMtHaPoPCYJM+
k9dfJmhzAFLNXbsr3fr4yBDcso8vcTyIQ7SIEVMfBFZj/JvQJkWqPTv+KOWXjeBt0Q7qzRoamANYneXR
W6336iTw0Q+FKUeEdHRxJWgBkg8Nkxo0DYhEViGpTT7yygnbWRwVhricpHUockAfFnt8Bwnsjgp3uj64
qmgsnH7se/uzKC0IudZjcBgt+axLnZ0UfC11Hn0EKUXjXShDLveHoS2DGa4ggFg8Wog927G3y60v//vk
/wG93L5/o/DArn+zs3zjLsUmmvZd0knBjRn+KVEfT2blHsCLIRYMJChyCs1lxPSodueH3j+w0wJapvUe
3imjzeAJDMib+8/VPQpqbL9+PHsF+wq+/YFg9sdttxB9KEwMrxt7v4YxHGcnIDnh9GAnbFvIeXXBa/y
wWnHAsFMDaFbZ0Mu37ypUSuFFigF2BFI4KQlvDMtnHpBg0y+l0MJ0XyA/dw00dq3L8rzkyfhh8W1HlkZ
7Yzj0UzEzMUEnIOUqJIzSKLn3cCg+PlFvZmEZ5nl0aFnDhRnc9uFuFKodBUKgTBfkyeWdStBaqaiZCsF
Ow== keliste@Keliste-Workstation
[keliste-centos@localhost ~]$
```

```
keliste@Keliste-Workstation:~$ ssh-copy-id -i ~/.ssh/id_rsa.pub keliste-centos@192.168.56.105
/usr/bin/ssh-copy-id: INFO: Source of key(s) to be installed: "/home/keliste/.ssh/id_rsa.pub"
The authenticity of host '192.168.56.105 (192.168.56.105)' can't be established.
ED25519 key fingerprint is SHA256:SKd6n4k3W3LBGviUDEapt6XKS6aB0KluTVd8RHbUdQ.
This key is not known by any other names
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
/usr/bin/ssh-copy-id: INFO: attempting to log in with the new key(s), to filter out any that a
re already installed
/usr/bin/ssh-copy-id: INFO: 1 key(s) remain to be installed -- if you are prompted now it is t
o install the new keys
keliste-centos@192.168.56.105's password:

Number of key(s) added: 1

Now try logging into the machine, with: "ssh 'keliste-centos@192.168.56.105'"
and check to make sure that only the key(s) you wanted were added.

keliste@Keliste-Workstation:~$
```

Task 4:

```
keliste@Keliste-Workstation:~$ ssh keliste-centos@192.168.56.105
Last login: Thu Jul 23 12:55:10 2026
[keliste-centos@localhost ~]$ hostname
localhost.localdomain
[keliste-centos@localhost ~]$
```

2. ANSWERS TO SUPPLEMENTAL ACTIVITY

1. What do you think we should look for in choosing the best distribution between Debian and Red Hat Linux distributions?
 - When choosing between Debian and Red Hat Linux distributions, you should consider the purpose of using the distribution. We should also consider the level of support and stability needed, the package management system, and the compatibility of the software we plan to run.
2. What are the main difference between Debian and Red Hat Linux distributions?
 - The difference between Debian and Red Hat Linux distributions is that Debian uses the APT package manager, which is also commonly used for Ubuntu. Meanwhile, Red Hat Linux uses the DNF and YUM package managers, which are also commonly used for CentOS and Fedora. Debian-based distributions are commonly used for desktops or personal computers, while Red Hat Linux distributions are more commonly used for enterprise servers and data centers.

3. ARTIFICIAL INTELLIGENCE (AI) USE DISCLOSURE STATEMENT

I hereby declare that artificial intelligence (AI) tools were used, if applicable, in the preparation of this academic work. The following indicates the nature and extent of AI assistance:

Tools Used: **Claude AI**

Examples: ChatGPT, Microsoft Copilot, Grammarly, QuillBot, etc.

Purpose of Use: **Grammar Correction**

Examples: grammar correction, idea generation, formatting, summarization, code assistance, explanation of concepts, etc.

Extent of Use: **For grammar checking and correction**

Explain how AI was used and confirm that it did not replace original thinking, analysis, authorship, or completion of the required work.

By submitting this activity, I affirm that my use of AI complies with T.I.P.'s AI usage policy and does not exceed the permitted limits for similarity, automated content generation, or academic assistance.

I understand that any false, incomplete, or misleading disclosure may be subject to investigation in accordance with due process and may result in sanctions for violation of existing T.I.P. policies.