

Préparation du Raspberry PI



Le matériel




Installation du SE

Raspberry Pi OS: <https://www.raspberrypi.org/software/>

1. Télécharger le programme d'installation sur votre disque
2. Insérer une carte SD dans le lecteur approprié:
3. Démarrer le programme d'installation du SE:

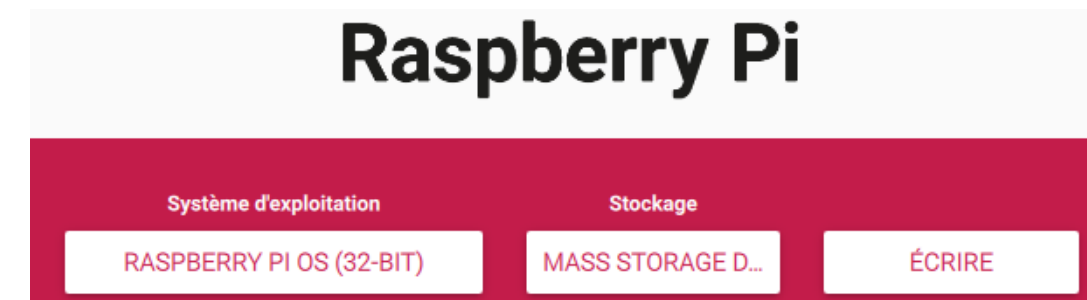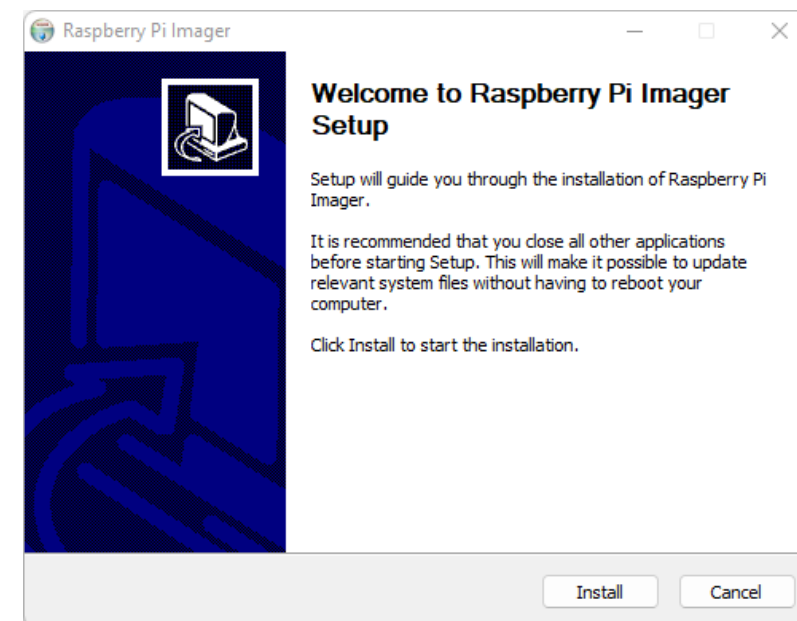

4. Après une 15aine de minutes, le SE sera sur la carte SD

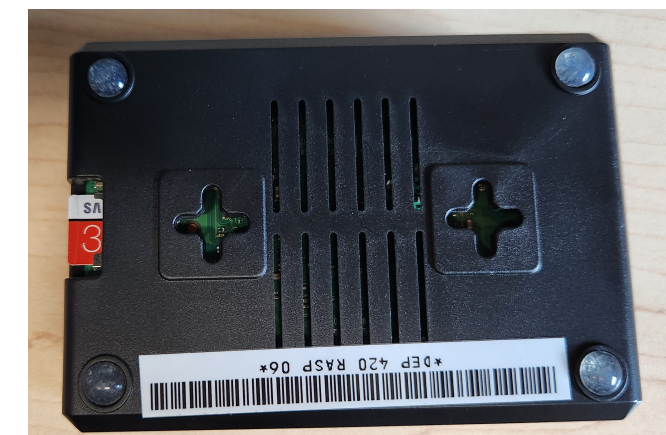


Premier démarrage de Raspi


1. Connexion wifi et câblée
2. Navigateur internet
3. Thonny
4. Configuration du Raspberry PI:
 - a) changer votre mot de passe et votre hostname
 - i) les défauts sont pi/raspberrypi
 - b) activer SSH et VNC (Server)
 - c) clavier
5. LXTerminal:
 - a) python
 - b) sudo apt-get update et sudo apt-get upgrade
 - c) sudo apt-get install xrdp # pour les connections
 - d) hostname -I #(i majuscule, obtenir l'IP)

Connexion à distance

1. Installer [VNC Viewer](#) sur votre ordinateur (pas le Raspi)
2. Assurez-vous que votre machine et le Raspi sont en réseau
3. Avec VNC viewer ou SSH, connectez-vous à votre Raspi avec son hostname ou IP. Il se peut que vous ayez à redémarrer votre machine:

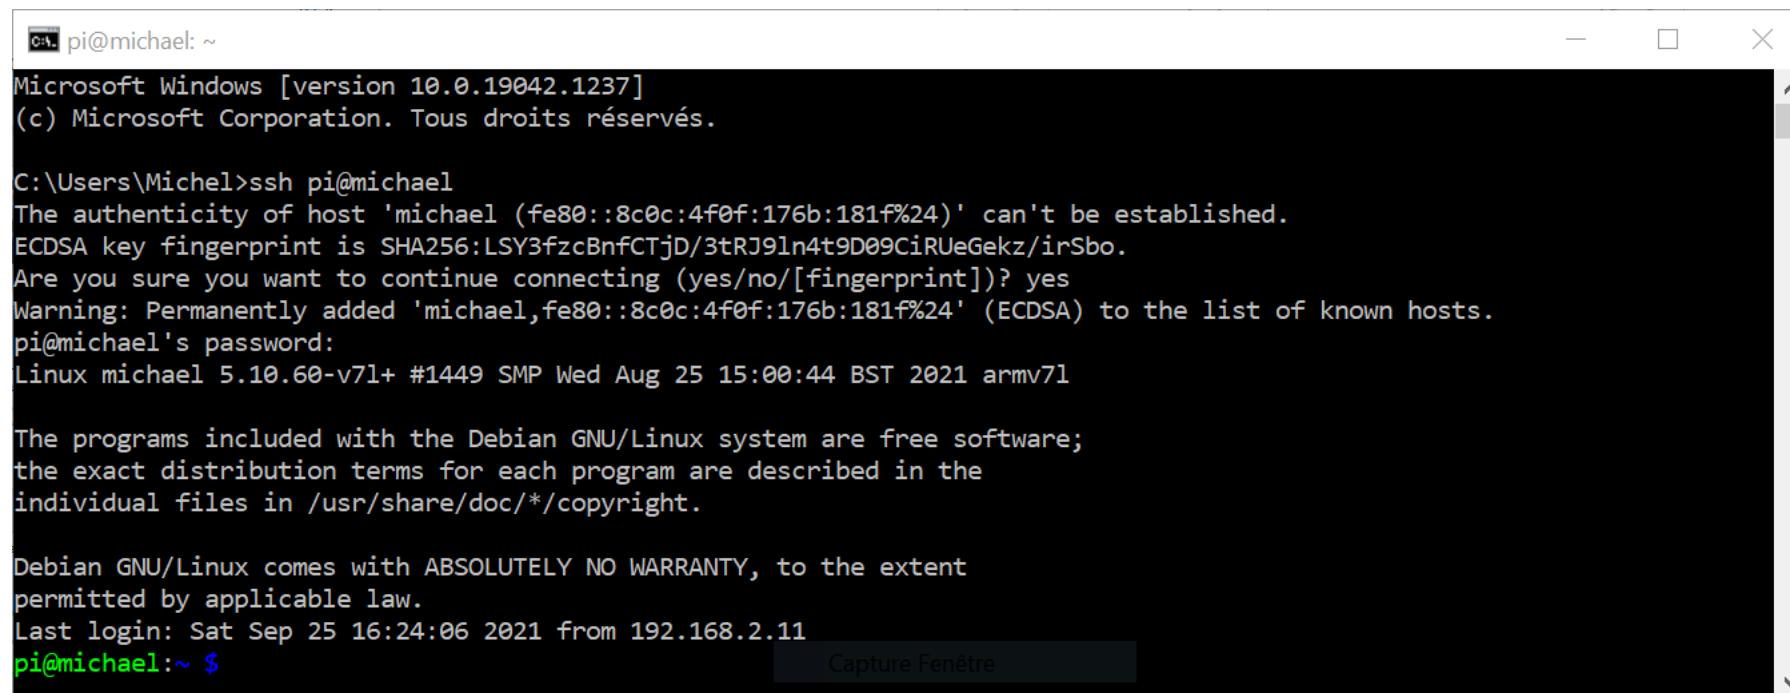

```
pi@michael: ~  
Microsoft Windows [version 10.0.19042.1237]  
(c) Microsoft Corporation. Tous droits réservés.  
  
C:\Users\Michel>ssh pi@michael  
The authenticity of host 'michael (fe80::8c0c:4f0f:176b:181f%24)' can't be established.  
ECDSA key fingerprint is SHA256:LSY3fzcBnfCTjD/3tRJ9ln4t9D09CiRUeGekz/irSbo.  
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes  
Warning: Permanently added 'michael,fe80::8c0c:4f0f:176b:181f%24' (ECDSA) to the list of known hosts.  
pi@michael's password:  
Linux michael 5.10.60-v7l+ #1449 SMP Wed Aug 25 15:00:44 BST 2021 armv7l  
  
The programs included with the Debian GNU/Linux system are free software;  
the exact distribution terms for each program are described in the  
individual files in /usr/share/doc/*/copyright.  
  
Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent  
permitted by applicable law.  
Last login: Sat Sep 25 16:24:06 2021 from 192.168.2.11  
pi@michael:~ $
```

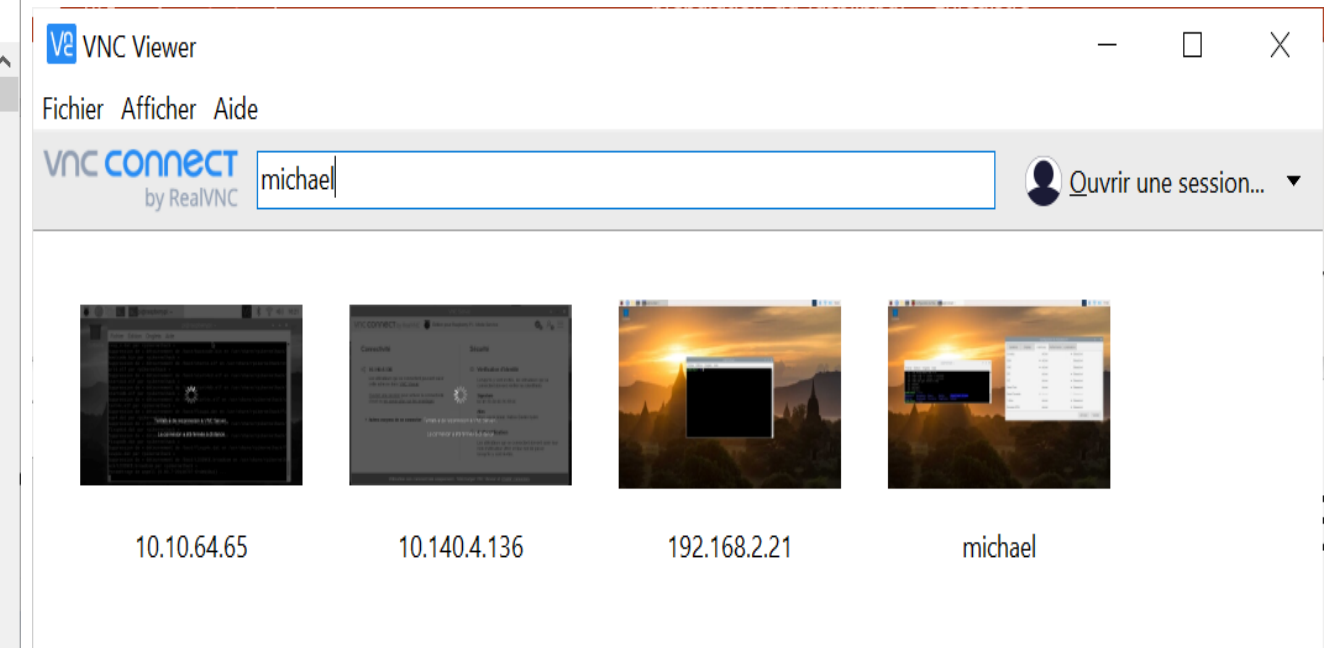

Première interaction sur une LED

```
>>> from gpiozero import LED
>>> ledRouge = LED(17)
>>> ledRouge.on()
>>> ledRouge.off()
```

Expérimentez ici :

- 2.3 à 2.6
- 2.9 et 2.10
- 2.12
- 2.14

