


WaterDrop: conditional trajectory-bootstrap differences

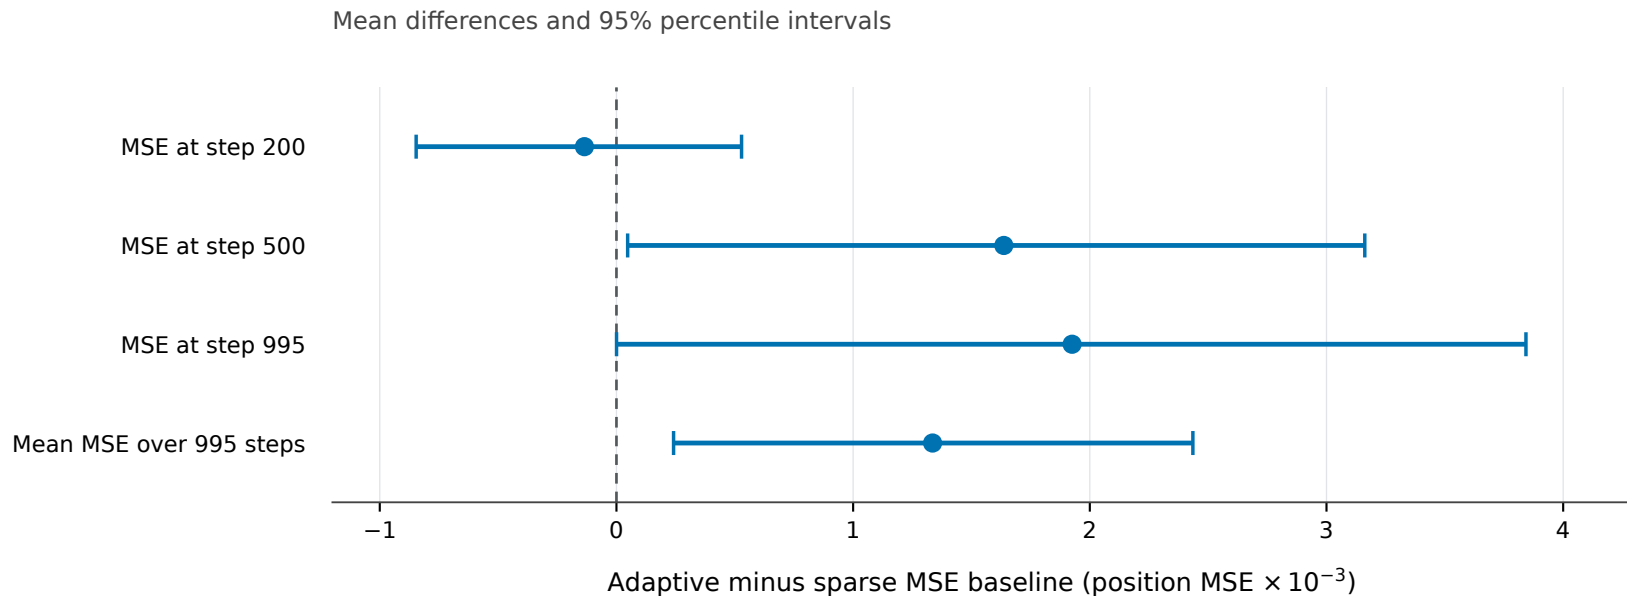

Negative values favor Adaptive; positive values favor the sparse MSE baseline.

100,000 resamples of 30 whole trajectories. Pairing by row order is assumed because trajectory IDs are absent.

Intervals are conditional on the saved models, pointwise and unadjusted; they do not measure training-seed variability.