


CANopen::Socket::receive

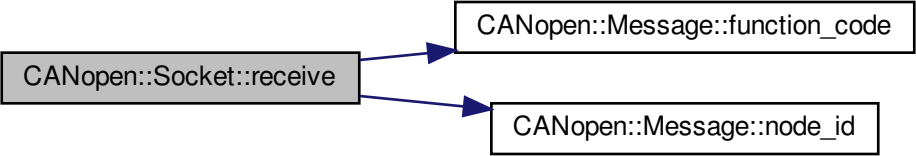

```
graph LR; A[CANopen::Socket::receive] --> B[CANopen::Message::function_code]; A --> C[CANopen::Message::node_id];
```

The diagram illustrates a data flow from a function call to two variables. On the left, a grey rectangular box contains the text 'CANopen::Socket::receive'. Two blue arrows originate from the right side of this box. The top arrow points to a white rectangular box containing 'CANopen::Message::function_code'. The bottom arrow points to another white rectangular box containing 'CANopen::Message::node_id'. All boxes have a thin black border.

CANopen::Message::function_code

CANopen::Message::node_id