


PGE 383

Support Vector Machines

- **Support Vector Machines**
- **Support Vector Machines Example**
- **Support Vector Machines Hands-on**

Michael Pyrcz, The University of Texas at Austin




PGE 383

Support Vector Machines

- **Support Vector Machines**


Michael Pyrcz, The University of Texas at Austin




Support Vector Machines


- A powerful supervised training, machine learning method for segmentation
- For example, forming a rule to segment a multivariate dataset into multiple categories with a decision rule.
- E.g. Geoscience Kanevski et al., 2000, Bio Goovaerts et al., 2018

Spatial Boundaries

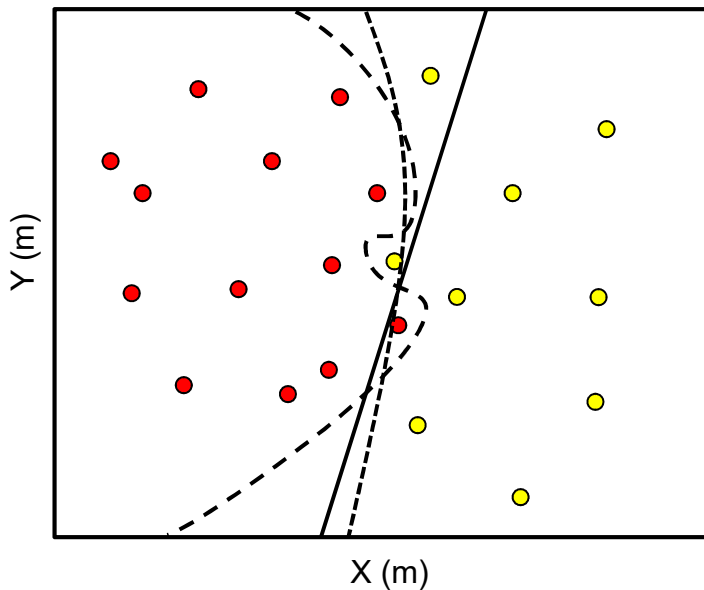

Multivariate Boundaries

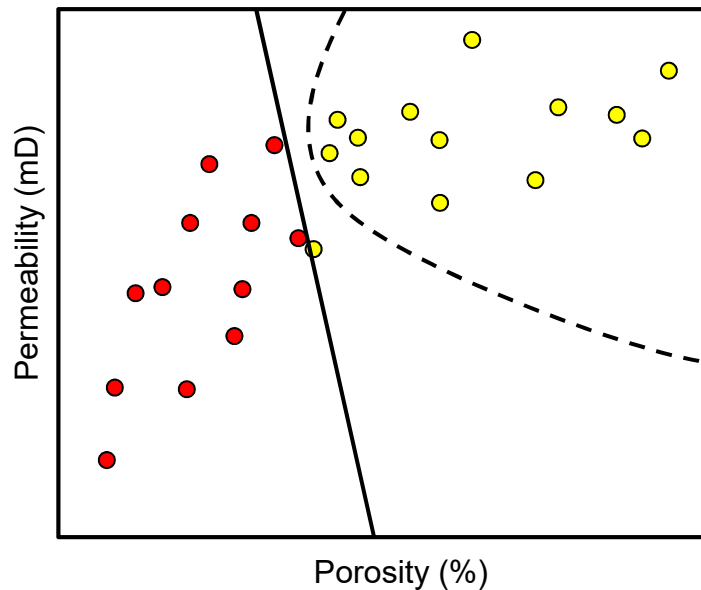




Support Vector Machines

General Comments on Support Vector Machines

- Generalization of linear decision boundaries for classification
- Applied for classification with optimal separating hyperplanes when the classes overlap.
- Nonlinearity is achieved by transforming the feature space (typically to a high dimensional space)
- Maximizes the margin, separation between cases in each category
- Training data well within the decision boundary have no influence



Support Vector Machines

1. Form a boundary with the largest possible **margin** between the different cases.
2. Data within the margin or misclassified update the model, they are called **support vectors**.
3. Project into problem into a higher dimensional space to solve linearly, with a variety of **kernels**.
4. The **C** parameter controls to penalty of misclassification, high C will result in a more complicated model (lower model bias, higher model variance).


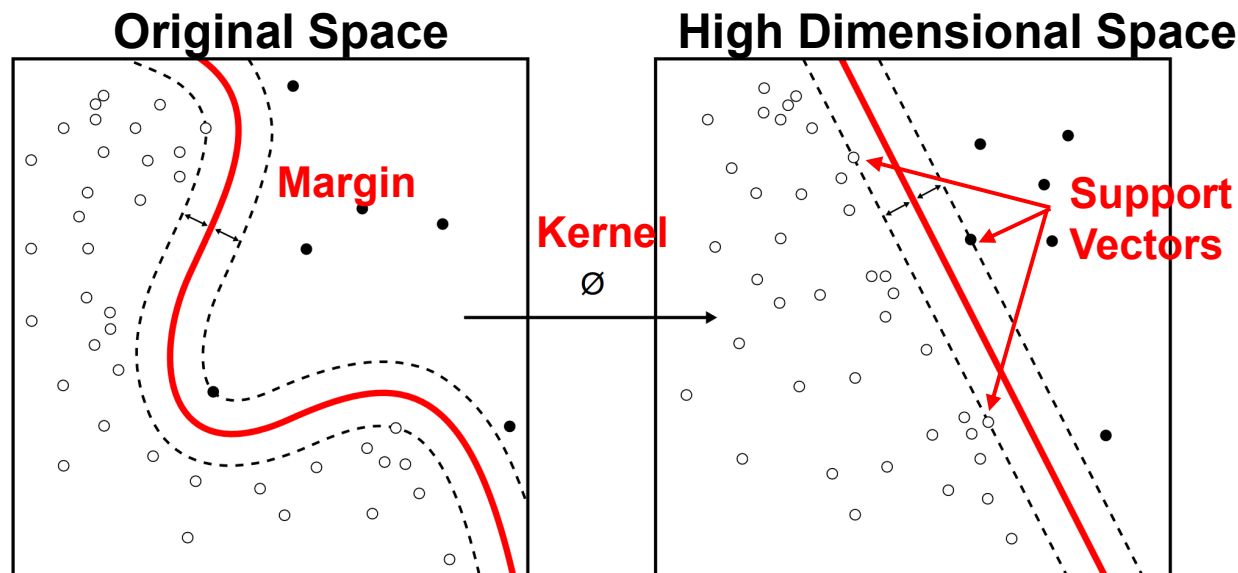


Image by Zirguez, available at https://en.wikipedia.org/wiki/Support-vector_machine#/media/File:Kernel_Machine.svg



Support Vector Machines

The Support Vector Machine model:

Solve for the hyperplane:

$$f(x) = x^T \beta + \beta_0$$

$f(x)$ is the signed distance from the boundary, $-$ one side and $+$ the other.


$$G(x) = \text{sign}(f(x))$$

where x is an vector, x_j , $j = 1, \dots, m$ predictor features

Therefore the constraint all data must be on the correct side of the boundary would be represented by:

$$y_i(x_i^T \beta + \beta_0) \geq 0$$

since y_i is the response feature with categories -1 or $+1$.



Support Vector Machines

The Margin Concept


When the training data are overlapping it would not be possible nor desirable to develop a decision boundary that perfectly separates the categories for which this condition would hold:


$$y_i(x_i^T \beta + \beta_0) \geq 0$$

We need a model that allows for some misclassification.

$$y_i(x_i^T \beta + \beta_0) \geq M - \xi_i$$

We introduce the concept of a margin and a distance from the margin.

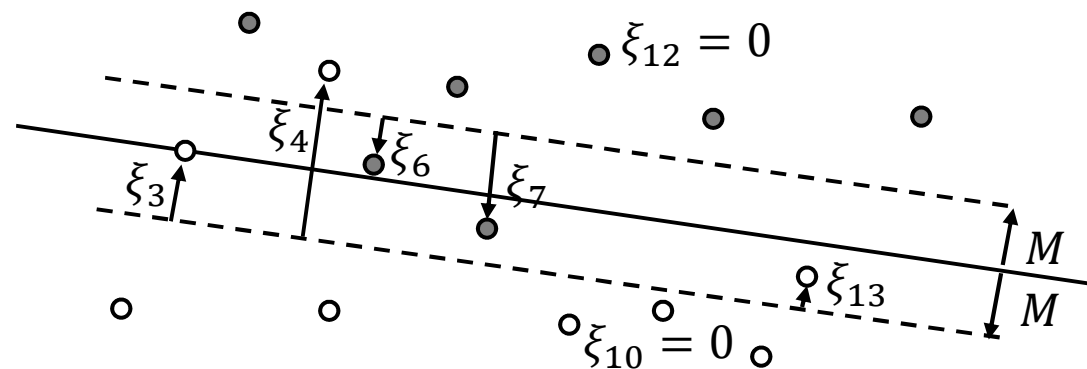



Support Vector Machines

Solving Support Vector Machines


This may be solved as a linear quadratic optimization:

define $M = 1/\|\beta\|$ then we can describe our system as:

$$\min \|\beta\| \text{ subject to } \begin{cases} y_i(x_i^T \beta + \beta_0) \geq 1 - \xi_i \quad \forall i \\ \xi_i \geq 0, \sum \xi_i \leq \text{constant} \end{cases}$$

Observations:

- Training data well on the correct side of the boundary have no influence
- Training data within the margin or on the incorrect side of the boundary influence the boundary and are known as support vector machines.



Support Vector Machines

Basis Expansion


- To add flexibility, capture non-linearity in our model
- May be applied in regression, classification etc.


Basis Expansion: transform to a linearly independent set of objects (functions)

$$h(x_i) = (h_1(x_i), h_2(x_i), \dots, h_M(x_i))$$

Here's an example for polygonal expansion

$$h_{i,1}(x_i) = x_i, \quad h_{i,2}(x_i) = x_i^2, \quad h_{i,3}(x_i) = x_i^3, \quad h_{i,4}(x_i) = x_i^4, \dots, \quad h_{i,k}(x_i) = x_i^k$$

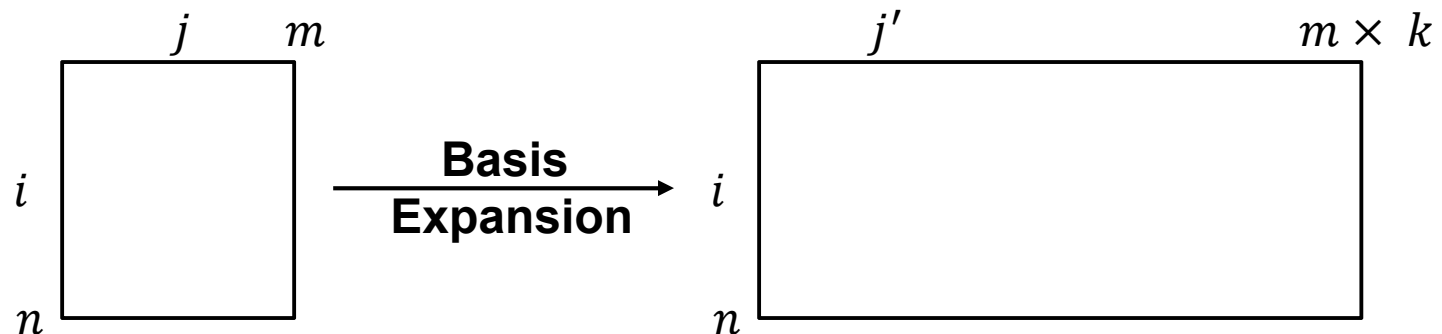



Support Vector Machines

The Kernel Trick


We can incorporate our basis expansion in our method without actually every needing to transform to:

$$h(x)$$

We only need the inner projects:

$$h(x)h(x')^T = \langle h(x), h(x') \rangle$$

Instead of the actual values in the transformed space, we just need the 'similarity' between all available training values.



Support Vector Machines


Other Kernel Transforms

We can substitute any kernel to map our problem to a higher dimensional space. We could in fact design our own under these conditions.

1. $k(x, x')$ is symmetric
 2. k_{matrix} is positive semi-definite
- $$k_{matrix} = \begin{bmatrix} k(x_1, x_1) & \cdots & k(x_1, x_n) \\ \vdots & \ddots & \vdots \\ k(x_n, x_1) & \cdots & k(x_n, x_n) \end{bmatrix}$$

Of course, there are various kernel ready for us to work with:

- Linear: $k(x_m, x_n) = x_m^T x_n$
- Radial Basis Function: $k(x_m, x_n) = e^{-\frac{\|x_m - x_n\|^2}{2\sigma^2}} = e^{-\gamma \|x_m - x_n\|^2}$
 - a $h(x)$ with infinite dimensionality
 - where $\|x_m - x_n\|^2$ is the squared Euclidean distance between feature vectors.
- New kernel, new support vector machine!




Support Vector Machines

Alternative Interpretation of Our Support Vector Machine

Our classifier is the linear weighted sum of a 'similarity' measure between the support vectors, x_n , and the new location, x

$$G(x) = \text{sign} \left(\sum_{\alpha_n > 0} \alpha_n y_n K(x_n, x) + \beta \right)$$




PGE 383

Support Vector Machines


- **Support Vector Machines Example**

Michael Pyrcz, The University of Texas at Austin




Support Vector Machines Demonstration

Demonstration workflow with support vector machines to form a decision rule for segmentation. Here's the training data.

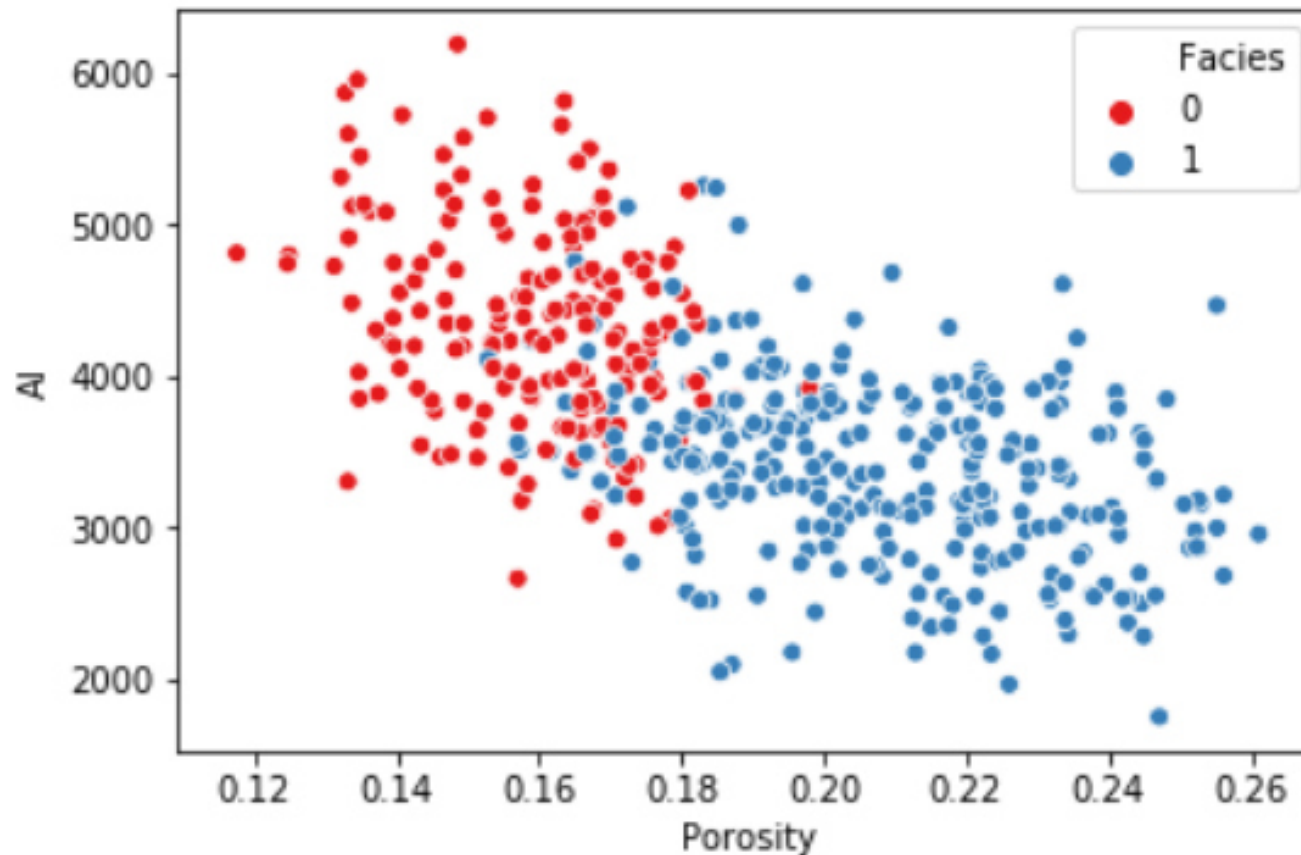


Workflow developed by Wendi Liu, PhD student at The University of Texas at Austin.




Support Vector Machines Demonstration

Linear kernel – decision boundary and support vectors highlighted.

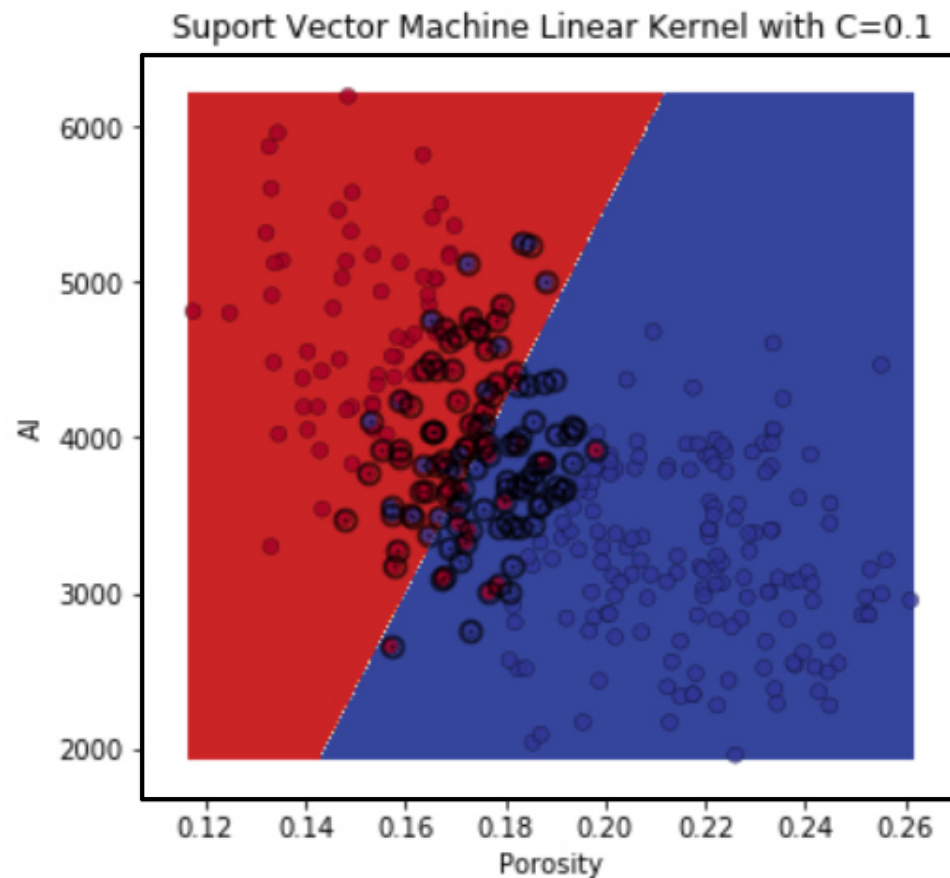


Workflow developed by Wendi Liu, PhD student at The University of Texas at Austin.




Support Vector Machines Demonstration

3rd Order Polynomial Kernel – decision boundary and support vectors highlighted.

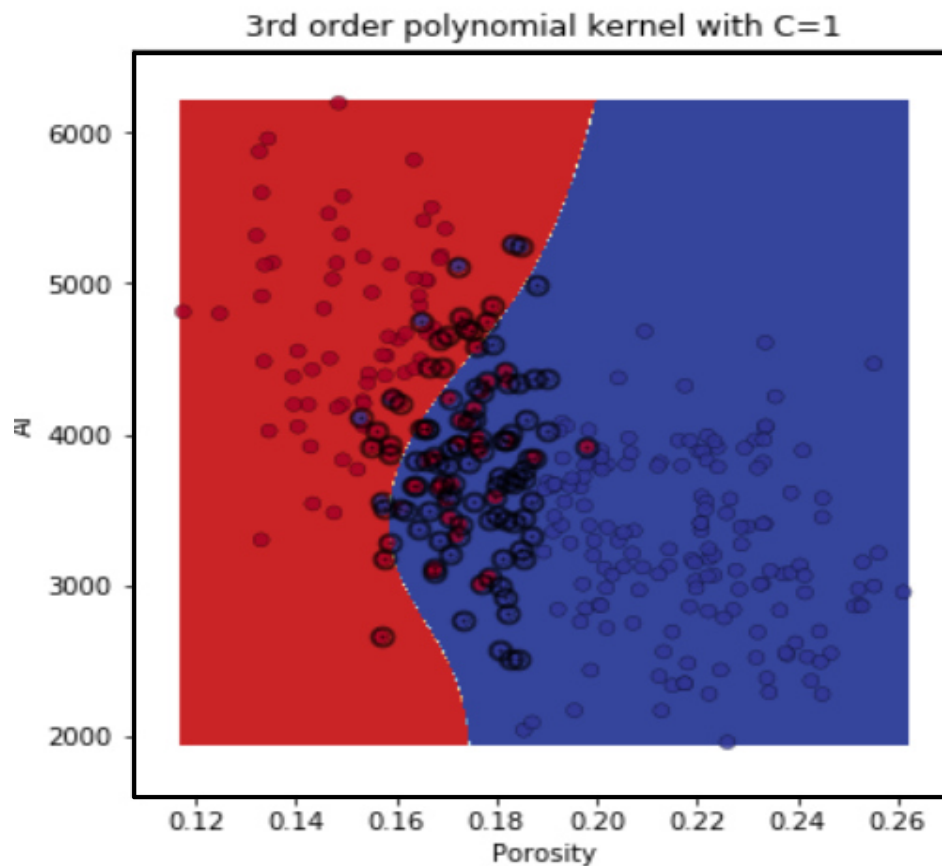


Workflow developed by Wendi Liu, PhD student at The University of Texas at Austin.




Support Vector Machines Demonstration

Radial Kernel – control of C and curvature parameter, γ .

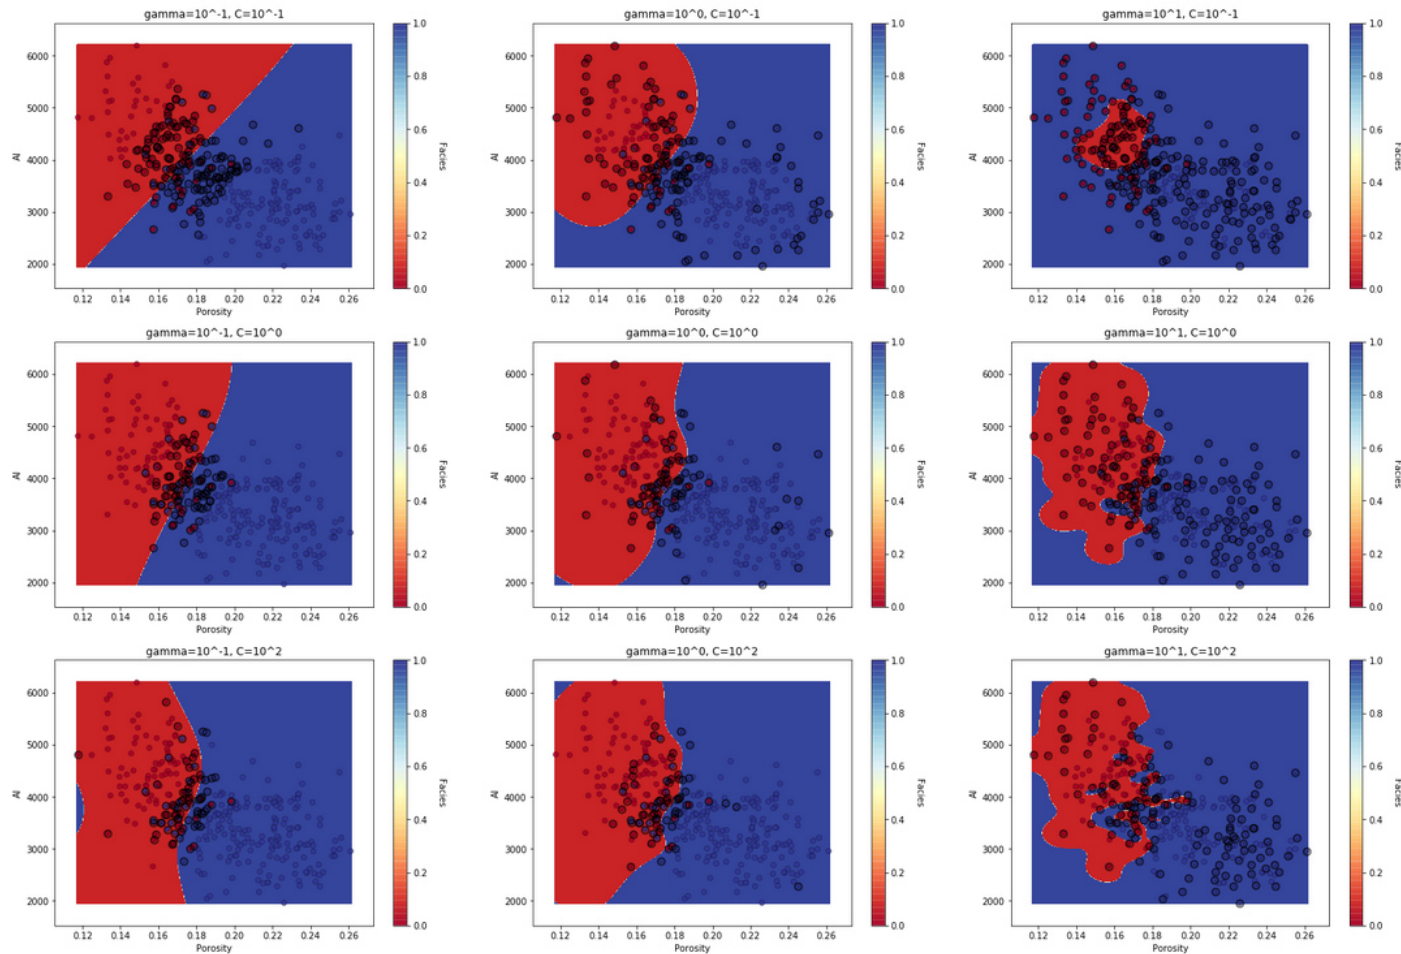


Workflow developed by Wendi Liu, PhD student at The University of Texas at Austin.




Support Vector Machines Demonstration

Performance with testing for a wide variety of parameters.

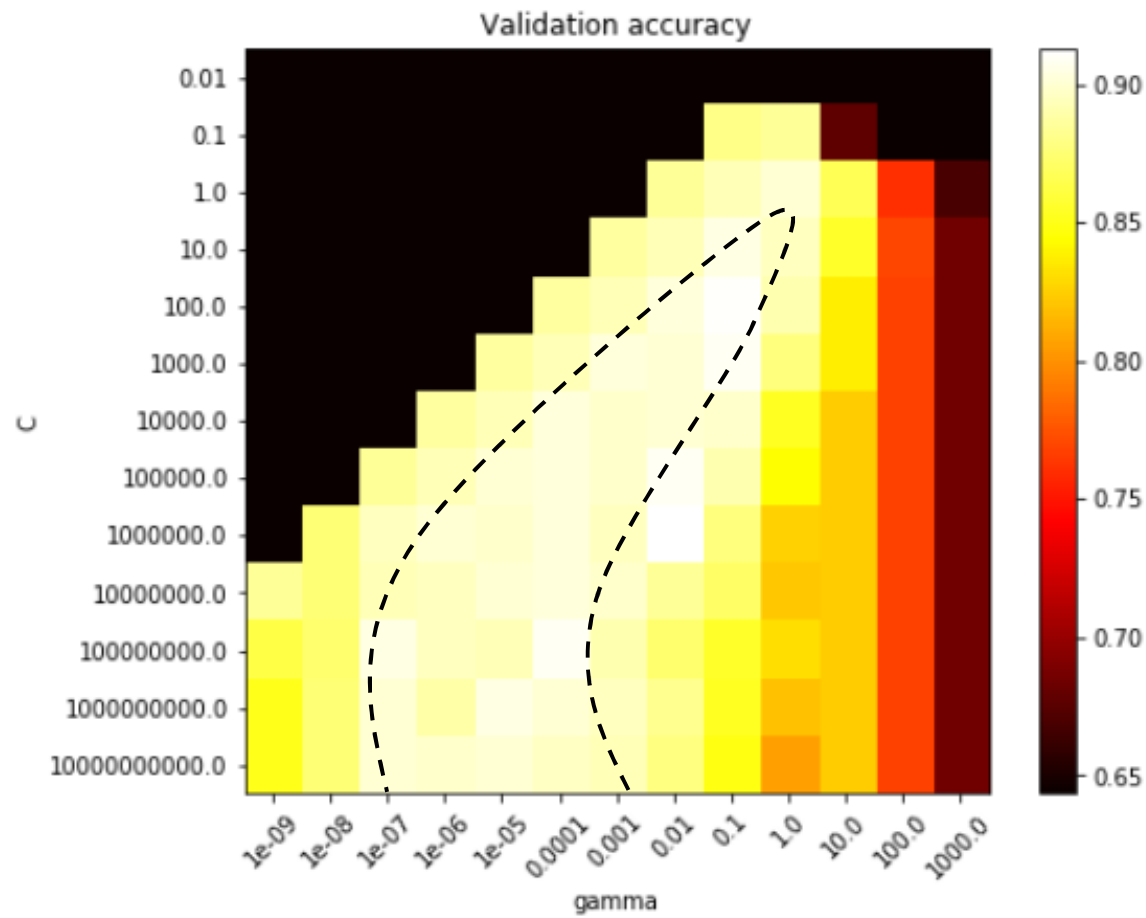


Workflow developed by Wendi Liu, PhD student at The University of Texas at Austin.




Support Vector Machines Demonstration

Examples of models that perform well, average and poorly in testing.

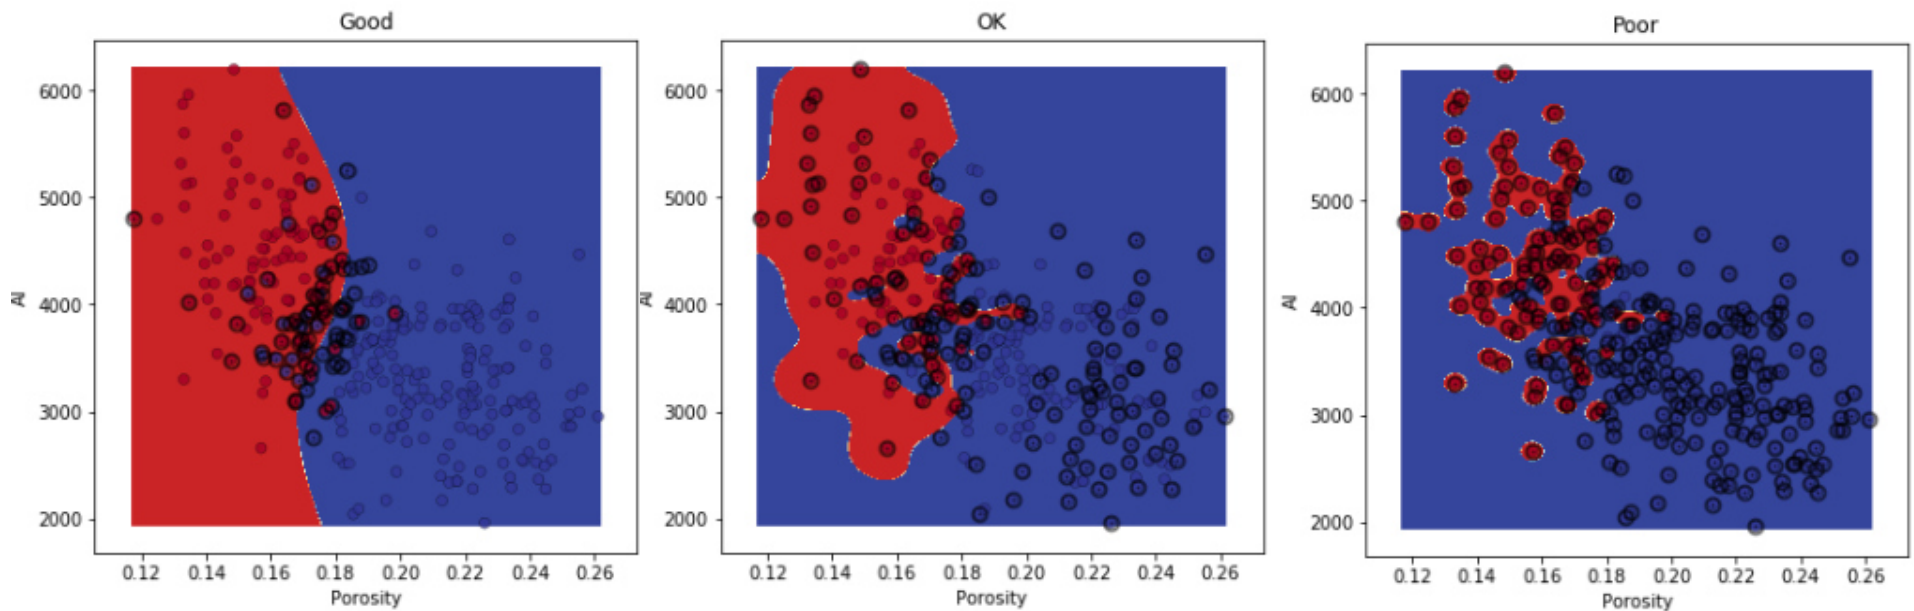


- A clear case of overfit.

Workflow developed by Wendi Liu, PhD student at The University of Texas at Austin.



Support Vector Machines

- Generalization of linear decision boundaries for classification
- $Y = f(X_1, \dots, X_m) + \epsilon$
- Optimal separating hyperplanes when the classes overlap.
- Nonlinearity is achieved by transforming the feature space (typically to a high dimensional space)
- Maximizes the margin, separation between cases in each category




PGE 383

Support Vector Machines

- **Support Vector Machines Hands-on**

Michael Pyrcz, The University of Texas at Austin



Support Vector Machines Demonstration

Demonstration workflow with support vector machines to form a decision rule for segmentation.



Subsurface Data Analytics

Support Vector Machine for Multivariate Segmentation of Facies in Python

Wendi Liu, Michael Pyrcz, University of Texas at Austin

Workflow Goals

Learn the basics of support vector machine in python to segment facies given petrophysical properties. This includes:

- Loading and visualizing sample data
- Trying out support vector machine with different kernels (linear, polynomial, radial basis function)
- Tuning the SVM model parameters and results evaluation

Objective


I want to provide hands-on experience with building subsurface modeling workflows. Python provides an excellent vehicle to accomplish this.

The objective is to remove the hurdles of subsurface modeling workflow construction by providing building blocks and sufficient examples. This is not a coding class per se, but we need the ability to 'script' workflows working with numerical methods.

Load the required libraries and functions

The following code **imports** the required libraries. After we execute this code we can use 'os', 'np', 'pd' to access functionality in each of these libraries.

File SubsurfaceDataAnalytics_SupportVectorMachines.ipynb at <https://git.io/fj3vX>.



PGE 383

Support Vector Machines

- **Support Vector Machines**
- **Support Vector Machines Example**
- **Support Vector Machines Hands-on**

Michael Pyrcz, The University of Texas at Austin