



01 · System architecture

Local research workspace · external execution supplies evidence through files

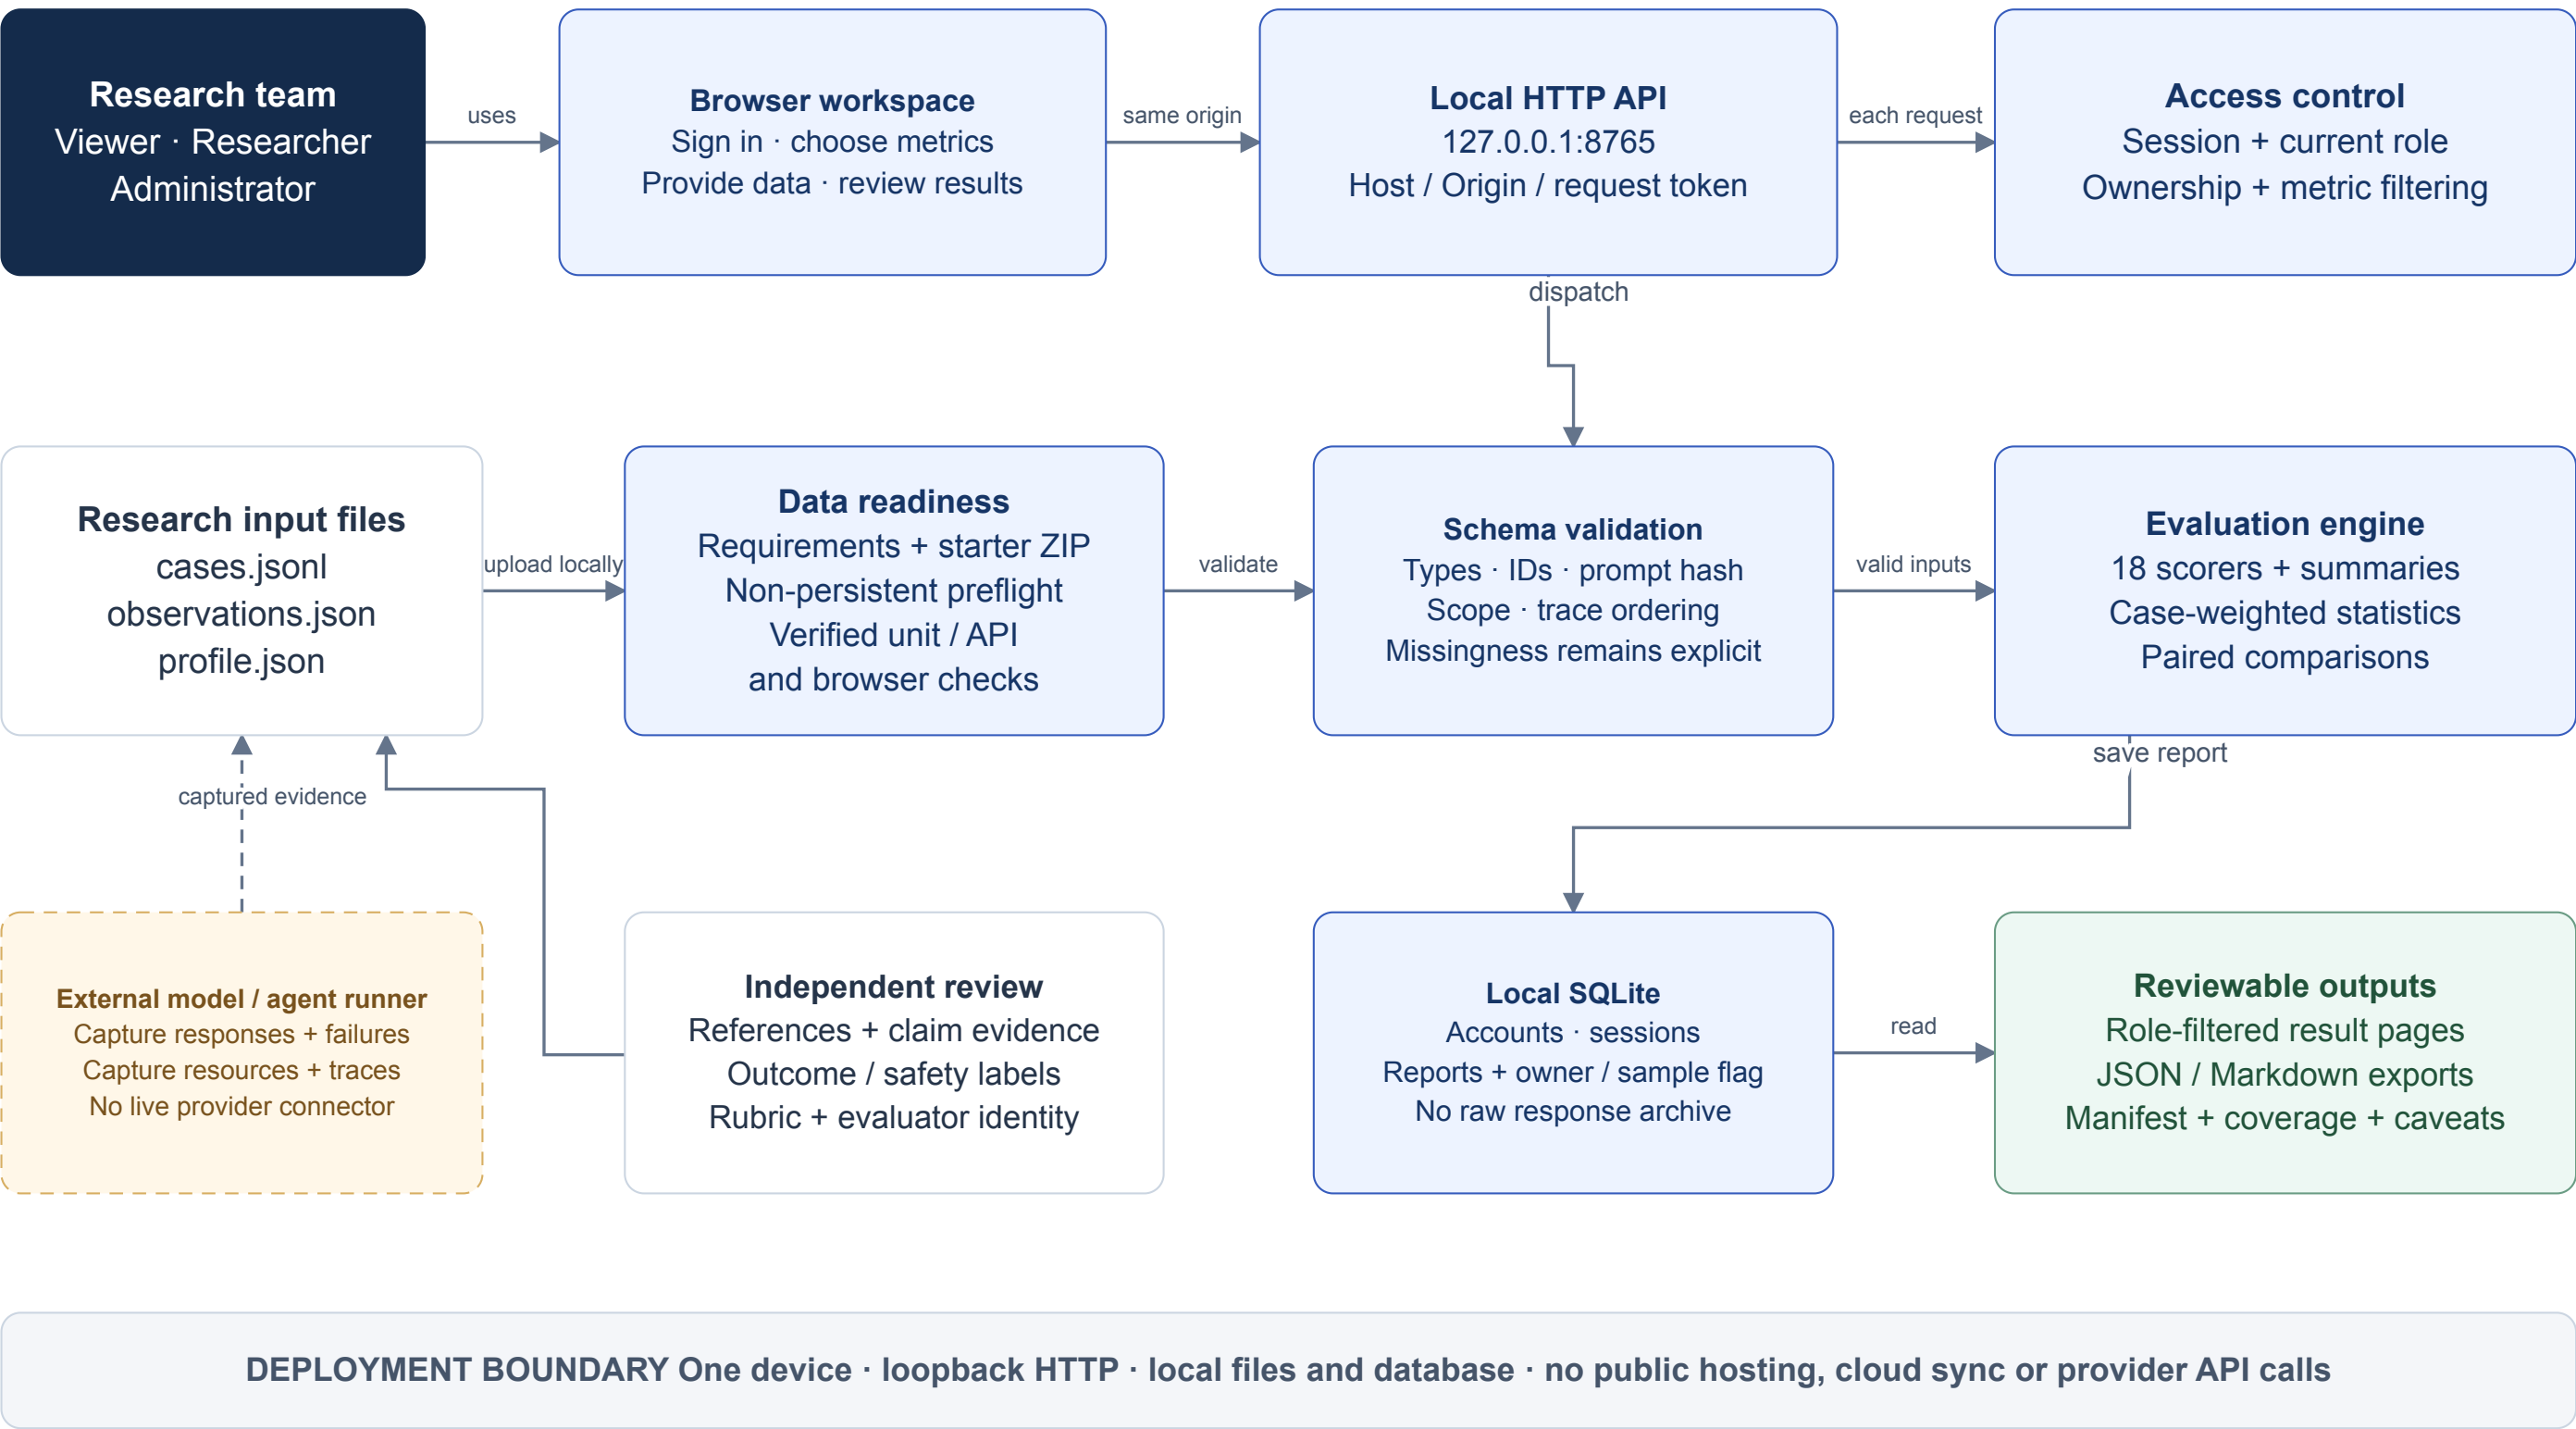

02 · Data provision and readiness


Prepare only the evidence your selected metrics need; validation is not scientific validation

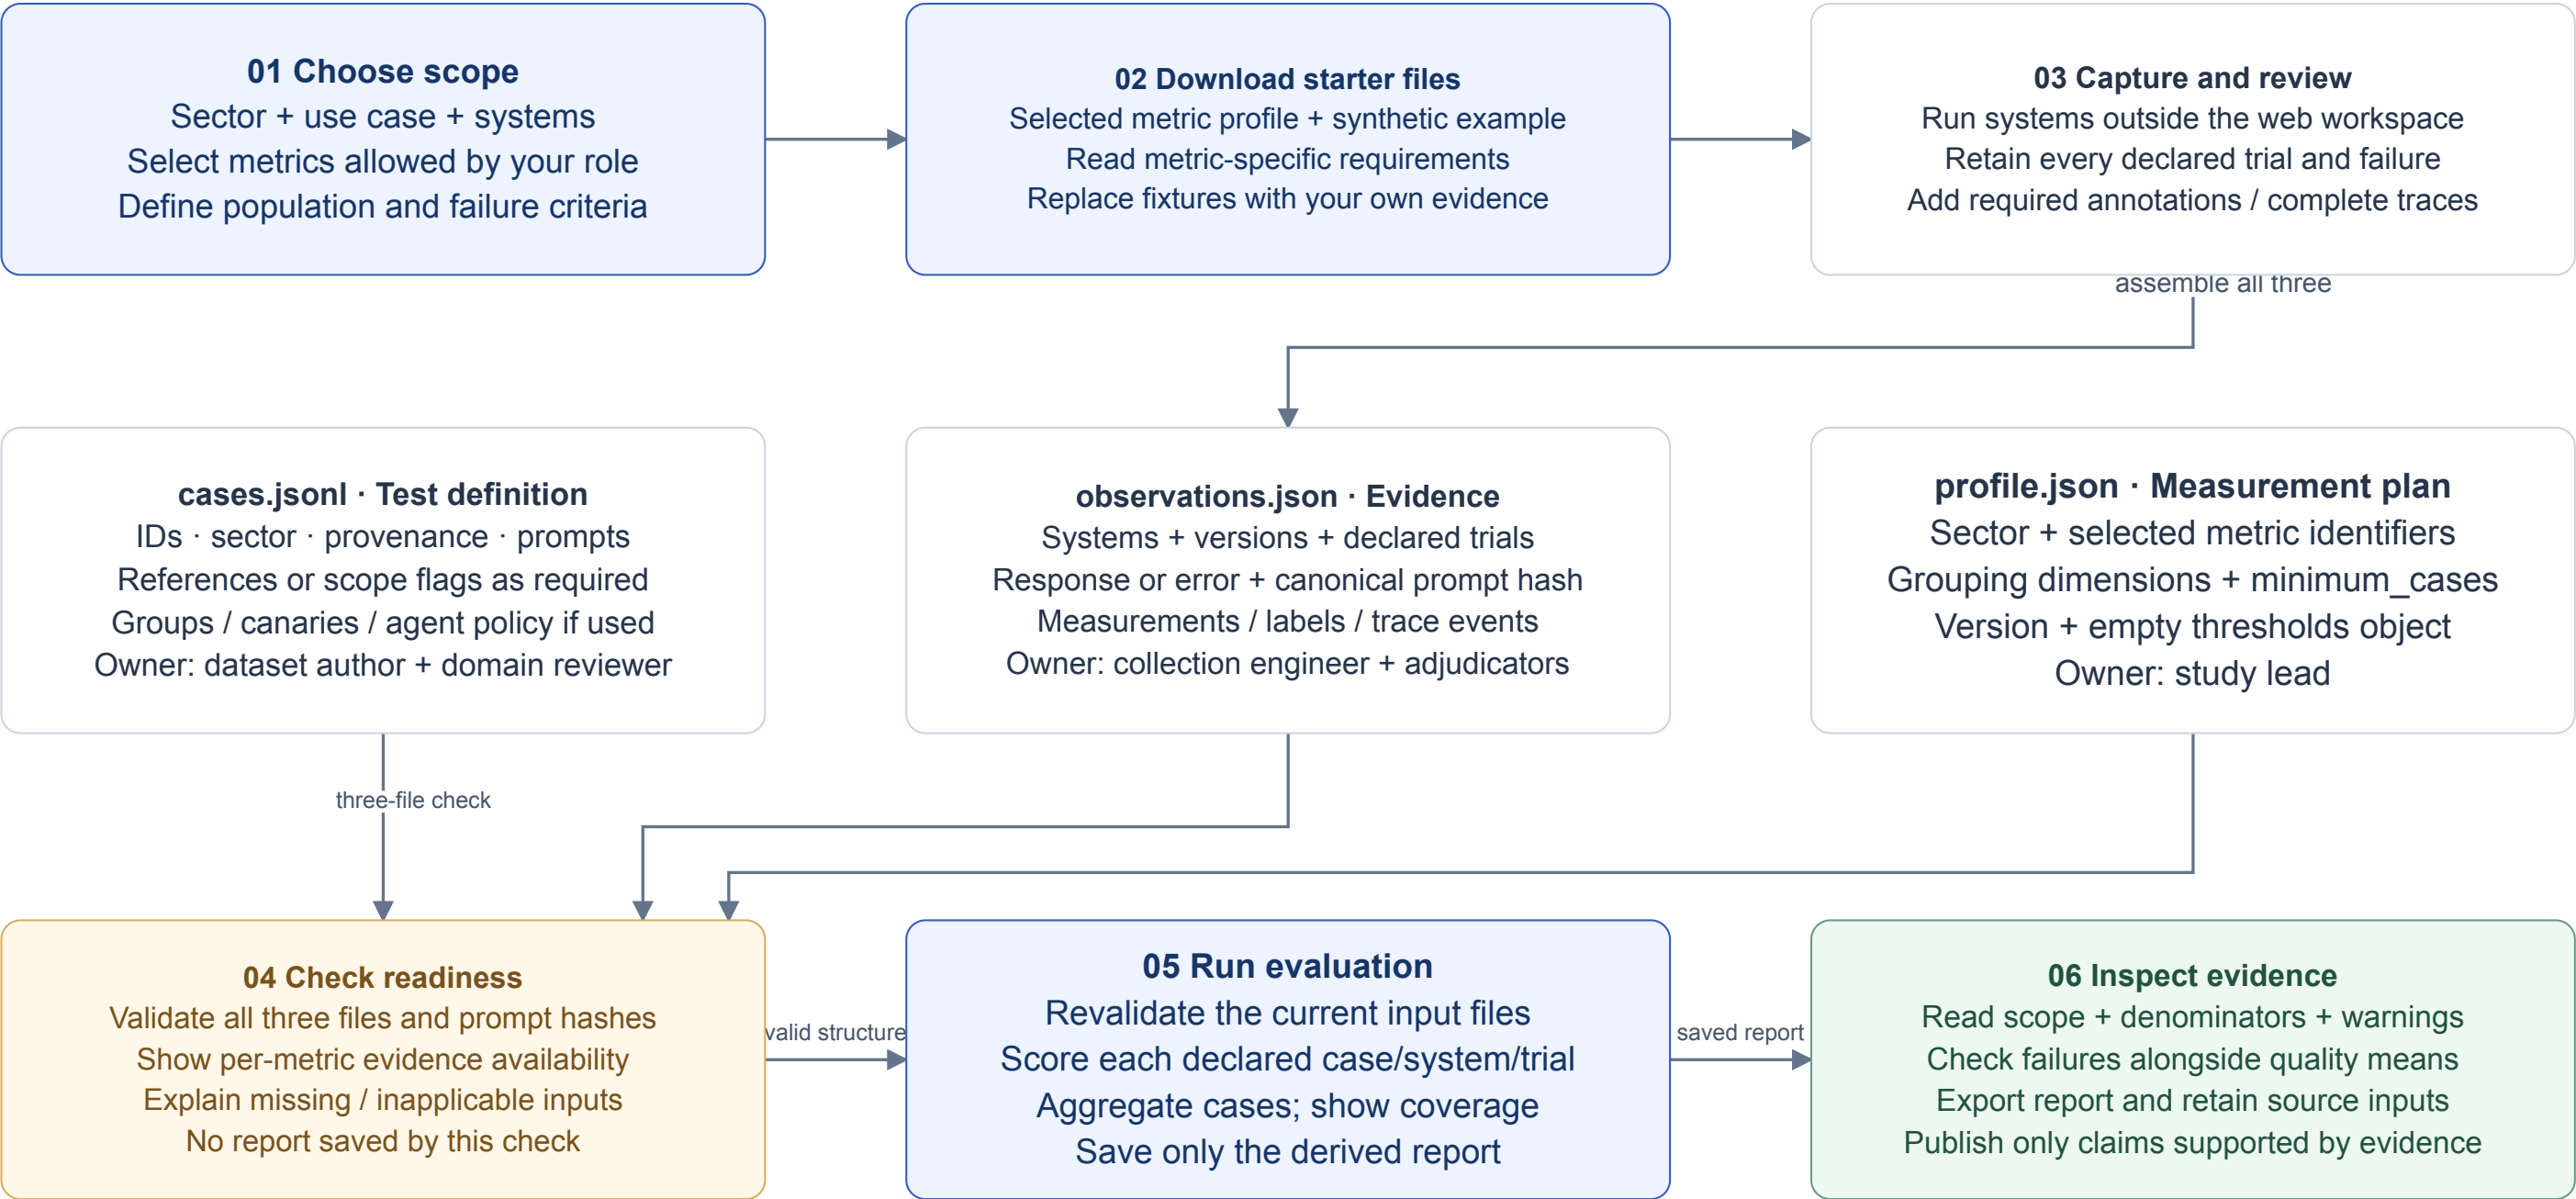

SCORING STATES Scored = evidence supplied · Missing = required evidence absent · Error = declared failure · N/A = outside the metric's scope

03 · Request and evaluation sequence


Authorization applies to direct API requests; the evaluation endpoint never trusts an earlier preflight

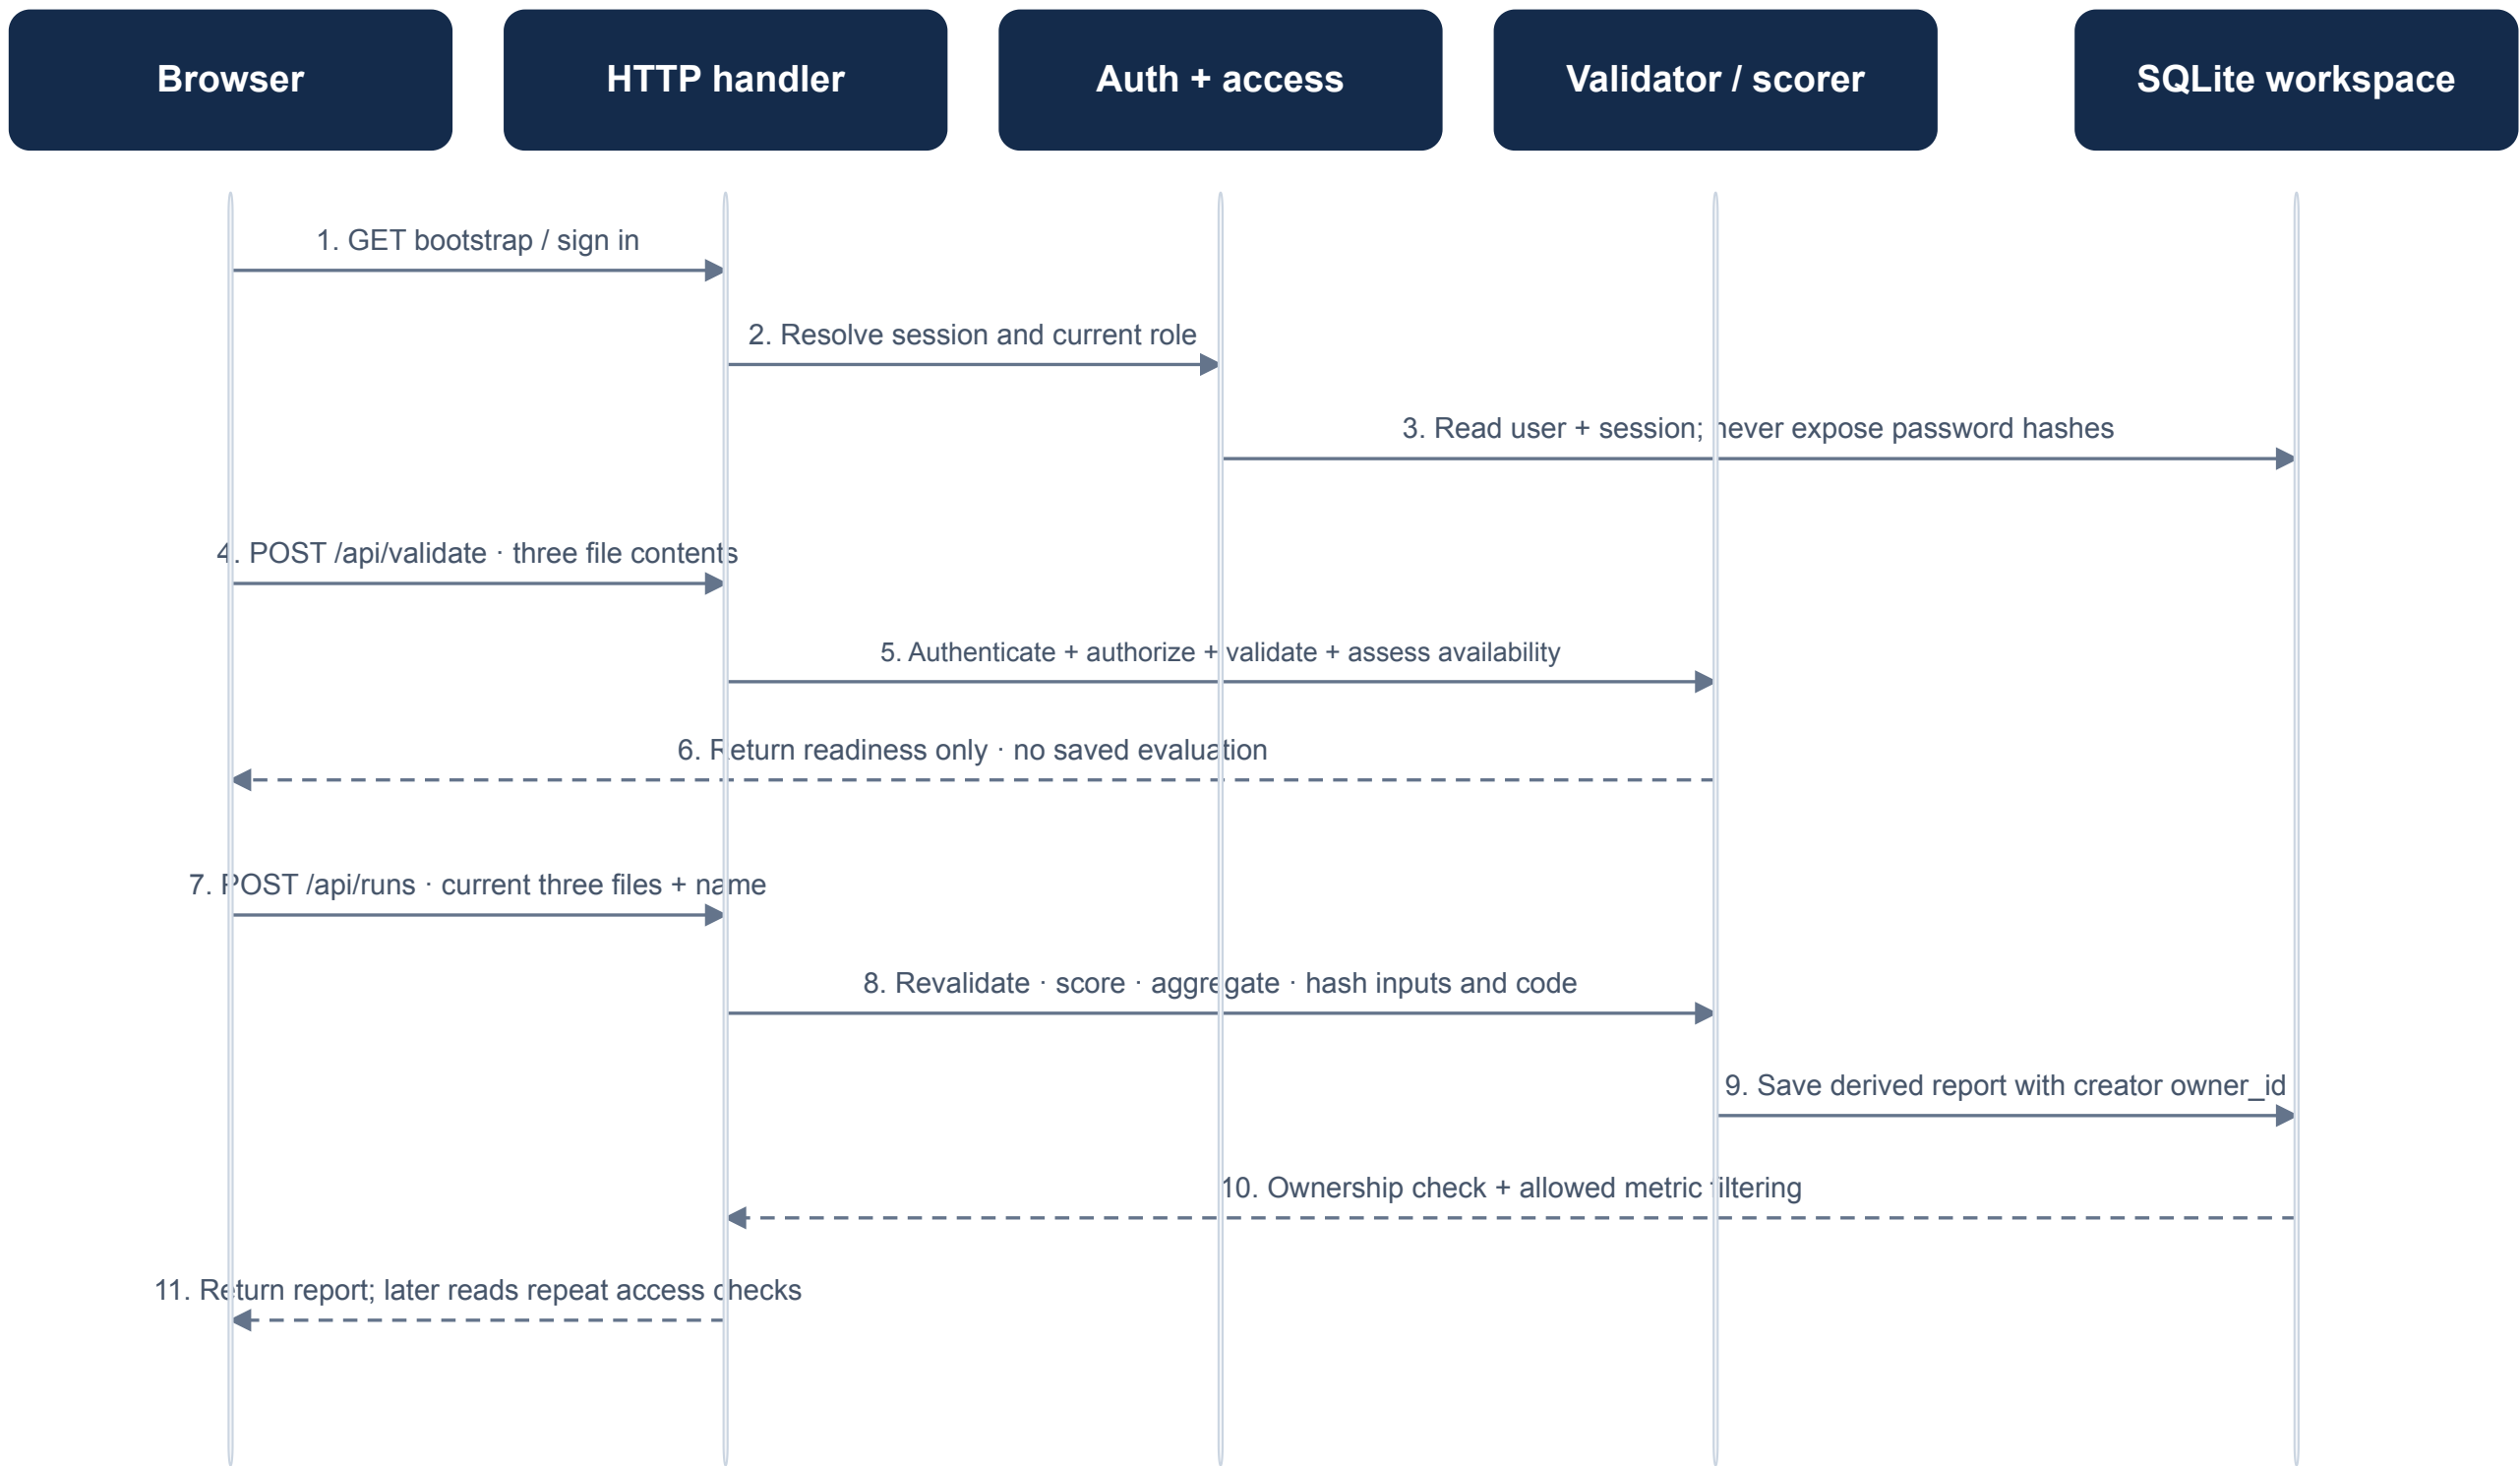

INVALID RUN → 400; INVALID PREFLIGHT → 200 + valid:false · NO SESSION → 401 · NO PERMISSION → 403 · INACCESSIBLE REPORT → 404 · BUSY EVALUATOR → 409


04 · Logical data and evidence model

SQLite stores identity and derived reports; source input files are retained separately by the research team

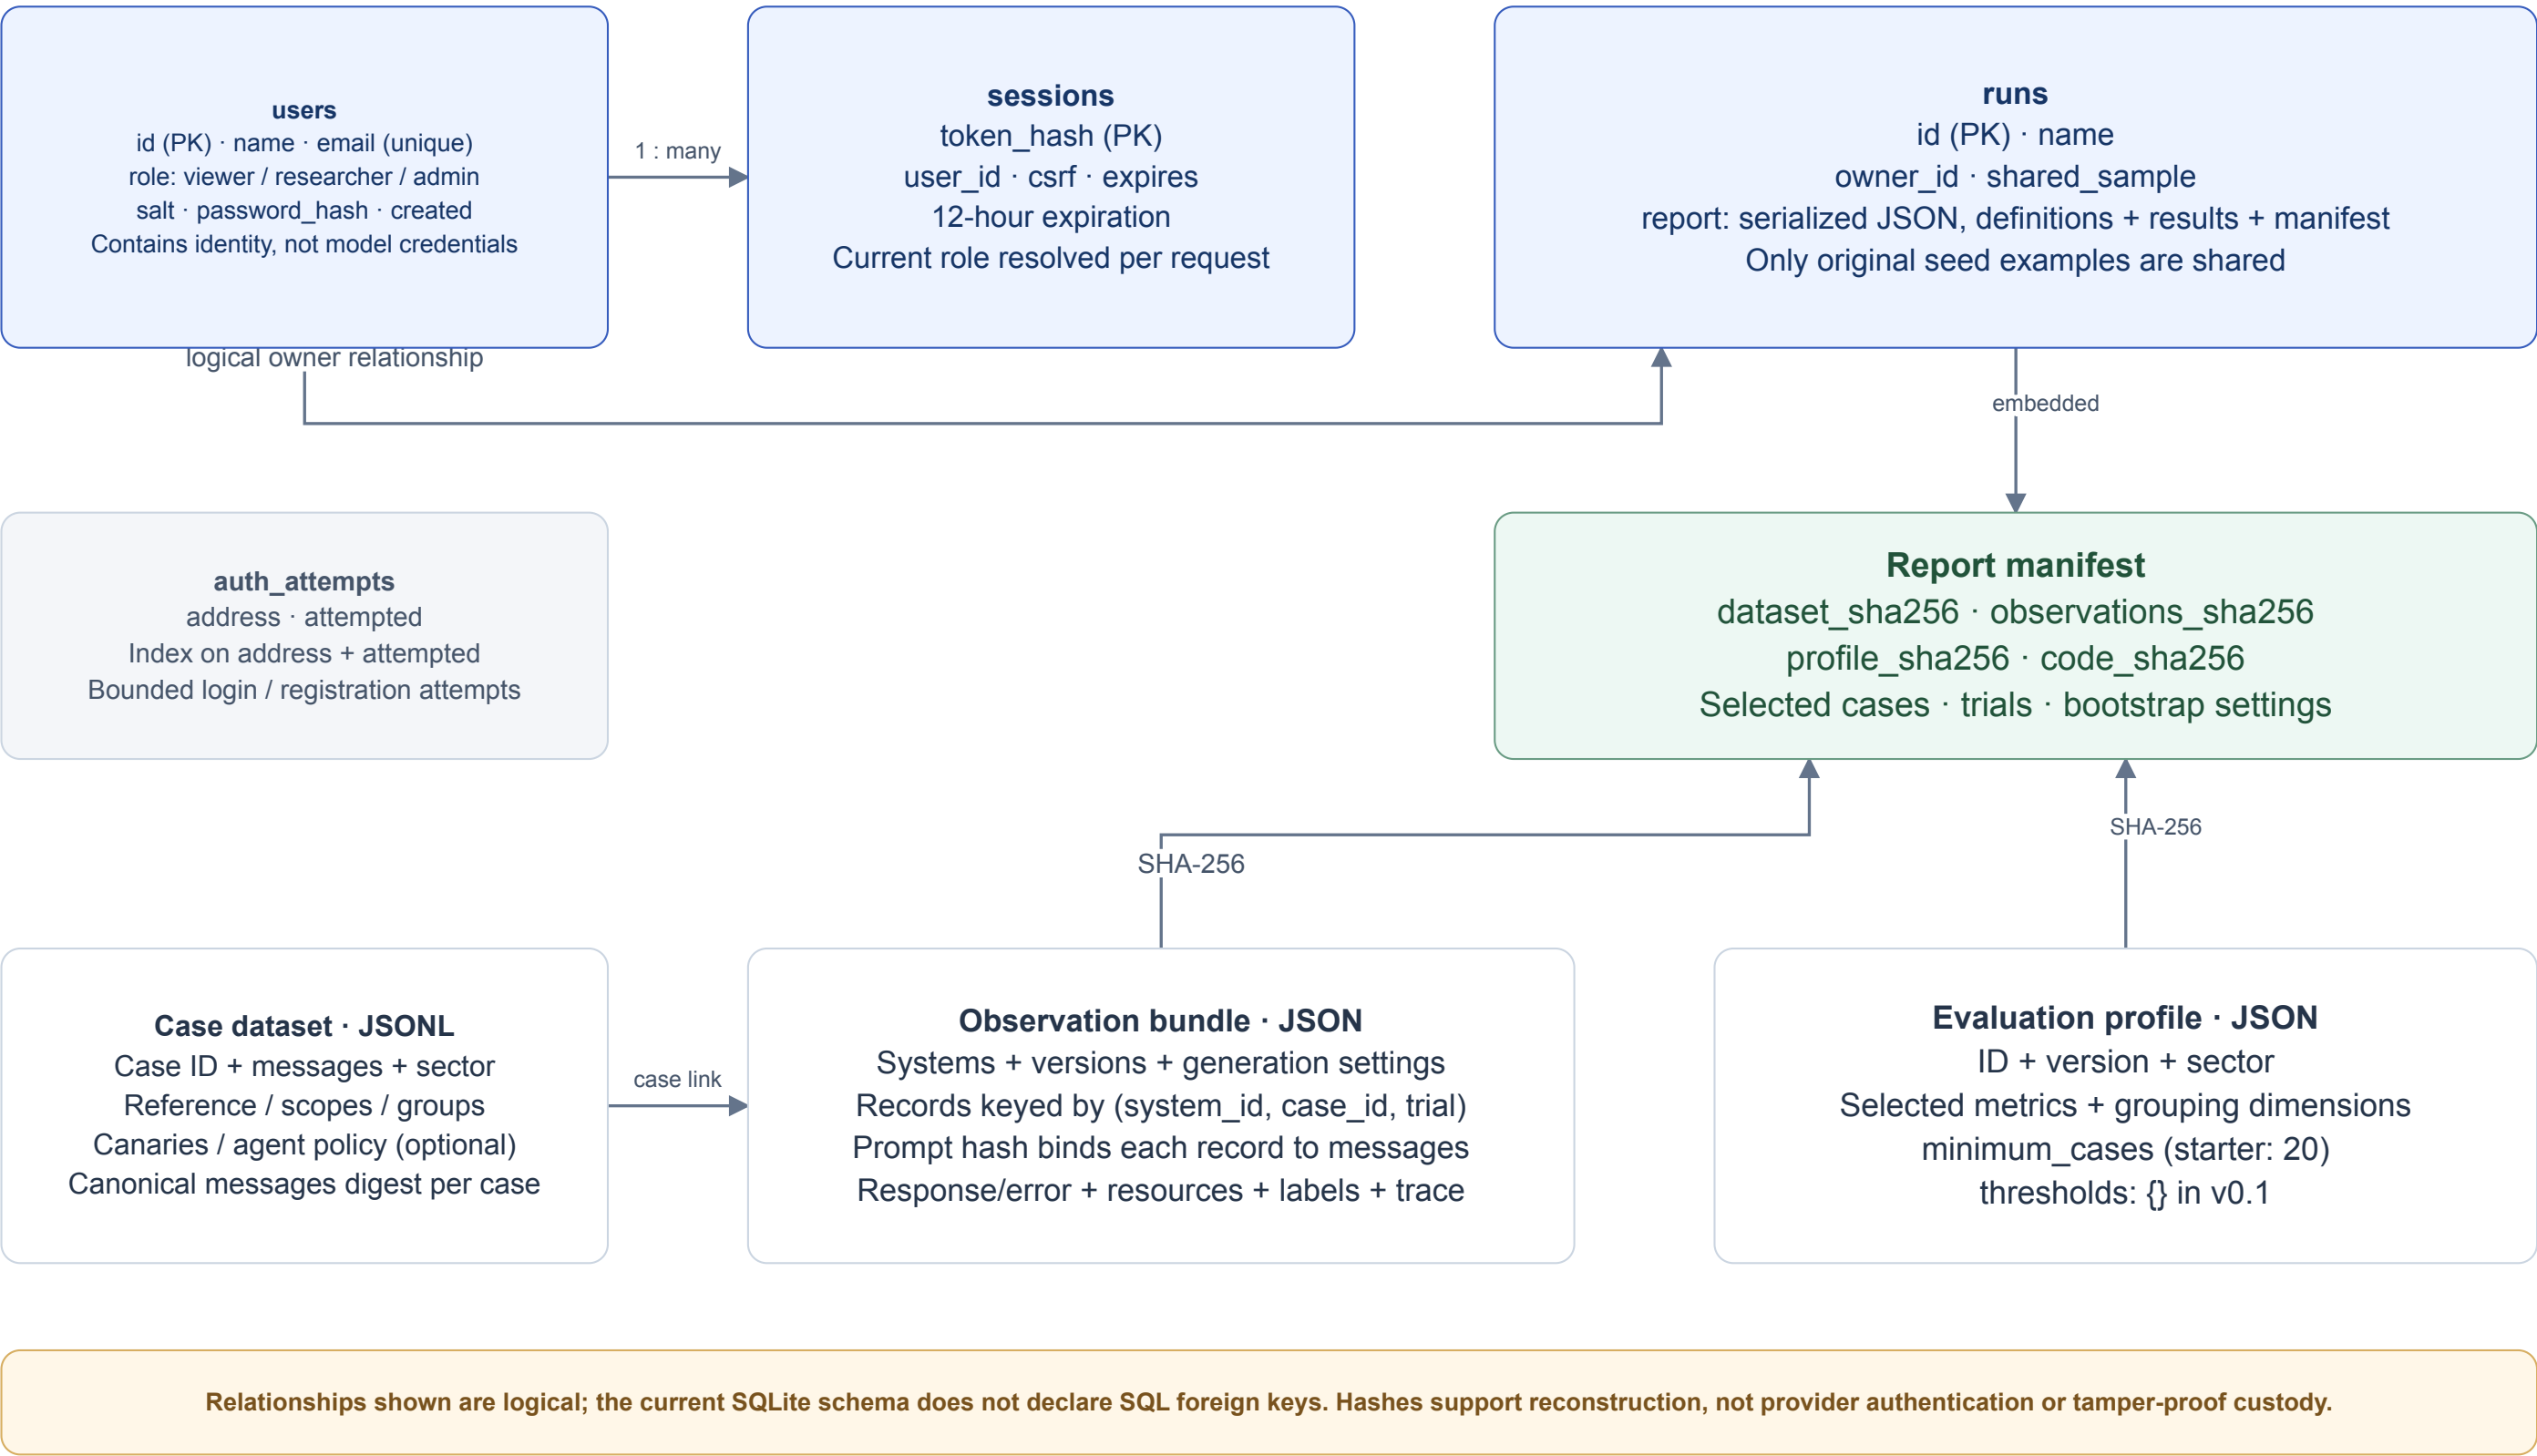

05 · Requirement-to-evidence chain

A traceable claim links a business need to executable behavior, a check, and preserved evidence

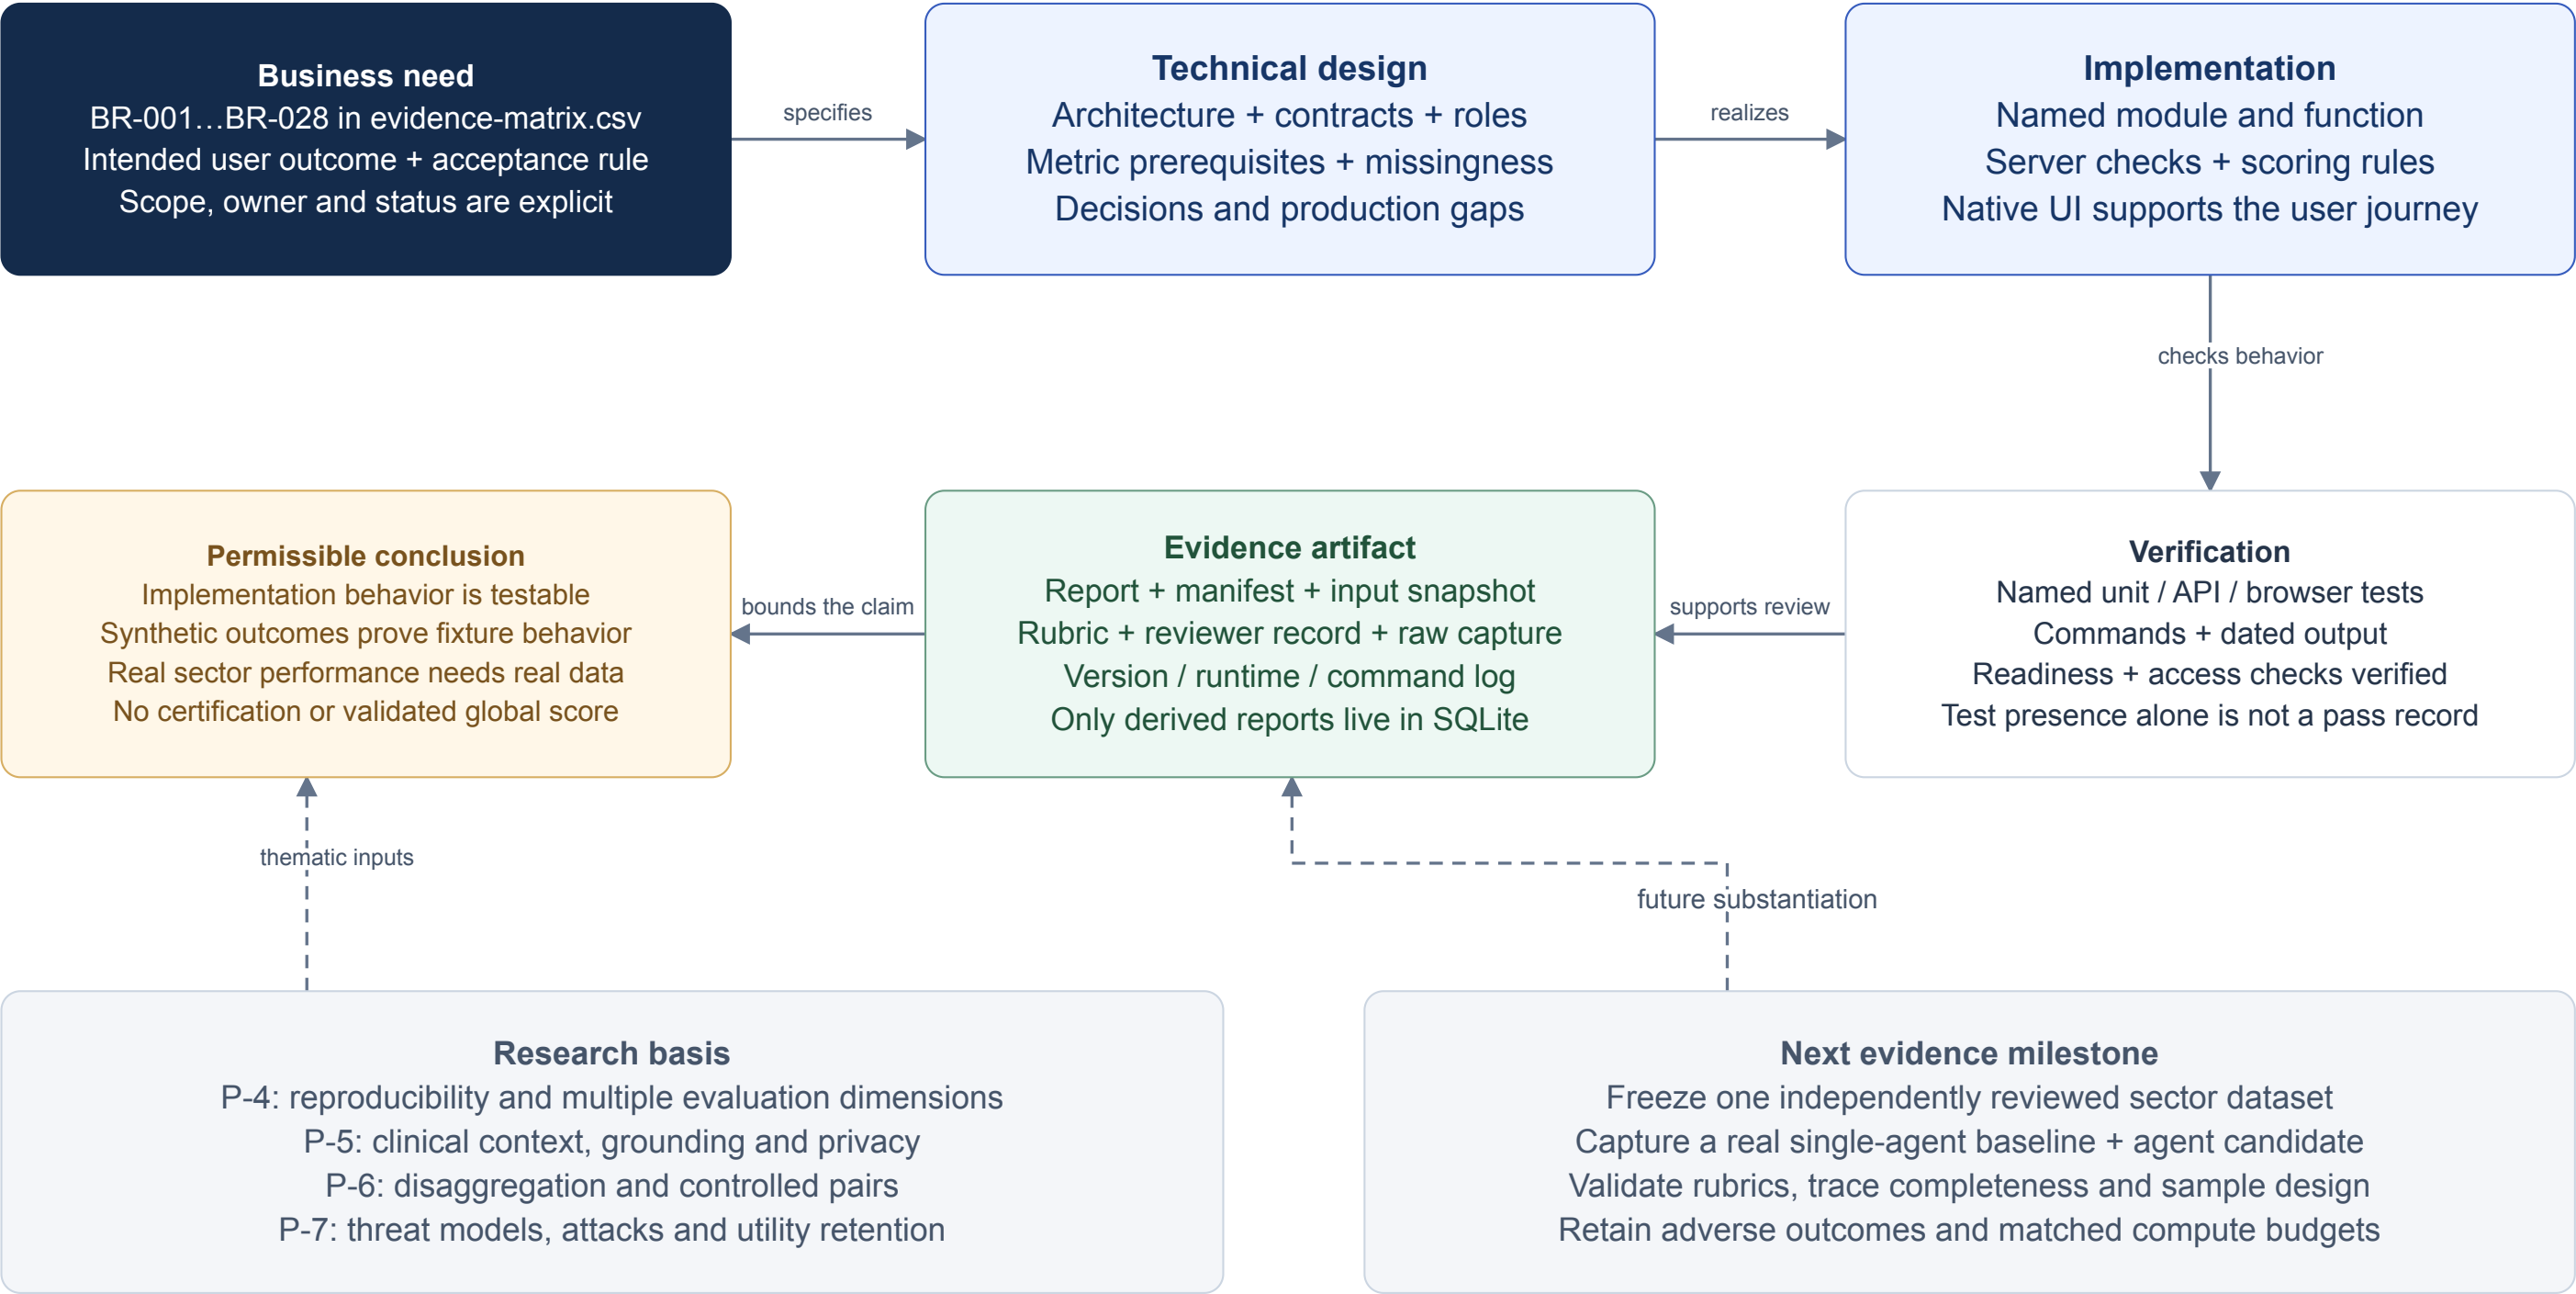

Paper alignment is thematic. Multi-agent metrics and product authorization rules are implementation extensions; neither is established as validated by the supplied papers.