



A-Maze-ing

This is the way

Summary: Create your own maze generator and display its result!

Version: 2.3

Contents

I	Forewords	2
II	AI Instructions	3
III	Common Instructions	5
III.1	General Rules	5
III.2	Makefile	5
III.3	Additional Guidelines	6
IV	Mandatory part	7
IV.1	Summary	7
IV.2	Usage	7
IV.3	Configuration file format	7
IV.4	Maze Requirements	8
IV.5	Output File Format	9
V	Visual representation	11
VI	Code reusability requirements	14
VII	Readme Requirements	16
VIII	Bonuses	18
IX	Submission and peer-evaluation	19

Chapter I

Forewords

Mazes have fascinated humans for thousands of years. From the legendary **Labyrinth of Knossos** in Greek mythology, built by Daedalus to imprison the Minotaur, to modern puzzle books and video games, mazes have always symbolized mystery, challenge, and clever design. In computer science, maze generation is more than just fun: it's a practical application of algorithms, randomness, and graph theory. Some famous algorithms used for maze generation, like *Prim's*, *Kruskal's*, or the *recursive backtracker*, are also used in real-world problems like network design or procedural content generation. Interestingly, perfect mazes (with one unique path between any two points) are directly related to *spanning trees* in graph theory. Building a maze, especially one you can visualize and share, is a great way to explore how computers can create structure from chaos, and have a bit of fun while doing it.

"A labyrinth is not a place to be lost, but a path to be found."

- Anonymous

Chapter II

AI Instructions

● Context

During your learning journey, AI can assist with many different tasks. Take the time to explore the various capabilities of AI tools and how they can support your work. However, always approach them with caution and critically assess the results. Whether it's code, documentation, ideas, or technical explanations, you can never be completely sure that your question was well-formed or that the generated content is accurate. Your peers are a valuable resource to help you avoid mistakes and blind spots.

● Main message

- 👉 Use AI to reduce repetitive or tedious tasks.
- 👉 Develop prompting skills — both coding and non-coding — that will benefit your future career.
- 👉 Learn how AI systems work to better anticipate and avoid common risks, biases, and ethical issues.
- 👉 Continue building both technical and power skills by working with your peers.
- 👉 Only use AI-generated content that you fully understand and can take responsibility for.

● Learner rules:

- You should take the time to explore AI tools and understand how they work, so you can use them ethically and reduce potential biases.
- You should reflect on your problem before prompting — this helps you write clearer, more detailed, and more relevant prompts using accurate vocabulary.
- You should develop the habit of systematically checking, reviewing, questioning, and testing anything generated by AI.
- You should always seek peer review — don't rely solely on your own validation.

● Phase outcomes:

- Develop both general-purpose and domain-specific prompting skills.
- Boost your productivity with effective use of AI tools.
- Continue strengthening computational thinking, problem-solving, adaptability, and collaboration.

● Comments and examples:

- You'll regularly encounter situations — exams, evaluations, and more — where you must demonstrate real understanding. Be prepared, keep building both your technical and interpersonal skills.
- Explaining your reasoning and debating with peers often reveals gaps in your understanding. Make peer learning a priority.
- AI tools often lack your specific context and tend to provide generic responses. Your peers, who share your environment, can offer more relevant and accurate insights.
- Where AI tends to generate the most likely answer, your peers can provide alternative perspectives and valuable nuance. Rely on them as a quality checkpoint.

✓ Good practice:

I ask AI: "How do I test a sorting function?" It gives me a few ideas. I try them out and review the results with a peer. We refine the approach together.

✗ Bad practice:

I ask AI to write a whole function, copy-paste it into my project. During peer-evaluation, I can't explain what it does or why. I lose credibility — and I fail my project.

✓ Good practice:

I use AI to help design a parser. Then I walk through the logic with a peer. We catch two bugs and rewrite it together — better, cleaner, and fully understood.

✗ Bad practice:

I let Copilot generate my code for a key part of my project. It compiles, but I can't explain how it handles pipes. During the evaluation, I fail to justify and I fail my project.

Chapter III

Common Instructions

III.1 General Rules

- Your project must be written in **Python 3.10 or later**.
- Your project must adhere to the **flake8** coding standard.
- Your functions should handle exceptions gracefully to avoid crashes. Use **try-except** blocks to manage potential errors. Prefer context managers for resources like files or connections to ensure automatic cleanup. If your program crashes due to unhandled exceptions during the review, it will be considered non-functional.
- All resources (e.g., file handles, network connections) must be properly managed to prevent leaks. Use context managers where possible for automatic handling.
- Your code must include type hints for function parameters, return types, and variables where applicable (using the **typing** module). Use **mypy** for static type checking. All functions must pass mypy without errors.
- Include docstrings in functions and classes following PEP 257 (e.g., Google or NumPy style) to document purpose, parameters, and returns.

III.2 Makefile

Include a **Makefile** in your project to automate common tasks. It must contain the following rules (mandatory lint implies the specified flags; it is strongly recommended to try **-strict** for enhanced checking):

- **install**: Install project dependencies using **pip**, **uv**, **pipx**, or any other package manager of your choice.
- **run**: Execute the main script of your project (e.g., via Python interpreter).
- **debug**: Run the main script in debug mode using Python's built-in debugger (e.g., **pdb**).
- **clean**: Remove temporary files or caches (e.g., **__pycache__**, **.mypy_cache**) to keep the project environment clean.

- **lint**: Execute the commands `flake8 .` and `mypy . --warn-return-any --warn-unused-ignores --ignore-missing-imports --disallow-untyped-defs --check-untyped-defs`
- **lint-strict** (optional): Execute the commands `flake8 .` and `mypy . --strict`

III.3 Additional Guidelines

- Create test programs to verify project functionality (not submitted or graded). Use frameworks like `pytest` or `unittest` for unit tests, covering edge cases.
- Include a `.gitignore` file to exclude Python artifacts.
- It is recommended to use virtual environments (e.g., `venv` or `conda`) for dependency isolation during development.

If any additional project-specific requirements apply, they will be stated immediately below this section.

Chapter IV

Mandatory part

IV.1 Summary

You will implement a maze generator in Python that takes a configuration file, generates a maze, possibly perfect (with a single path between entrance and exit), and writes it to a file using a hexadecimal wall representation. You will also provide a visual representation of the maze and organize your code so that the generation logic can be reused later.

IV.2 Usage

Your program must be run with the following command:

```
python3 a_maze_ing.py config.txt
```

- `a_maze_ing.py` is your main program file. You must use this name.
- `config.txt` is the only argument. It is a plain text file that defines the maze generation options. You can use a different filename.

Your program must handle all errors gracefully: invalid configuration, file not found, bad syntax, impossible maze parameters, etc. It must never crash unexpectedly, and must always provide a clear error message to the user.

IV.3 Configuration file format

The configuration file must contain one 'KEY=VALUE' pair per line.

Lines starting with `#` are comments and must be ignored.

The following keys are **mandatory**:

Key	Description	Example
WIDTH	Maze width (number of cells)	WIDTH=20
HEIGHT	Maze height	HEIGHT=15
ENTRY	Entry coordinates (x,y)	ENTRY=0,0
EXIT	Exit coordinates (x,y)	EXIT=19,14
OUTPUT_FILE	Output filename	OUTPUT_FILE=maze.txt
PERFECT	Is the maze perfect?	PERFECT=True

You may add additional keys (e.g., seed, algorithm, display mode) if useful.


A default configuration file must be available in your Git repository.

IV.4 Maze Requirements

- The maze must be randomly generated, but reproducibility via a seed is required.
- Each cell of the maze has between 0 and 4 walls, at each cardinal point (North, East, South, West).
- The maze must be valid, meaning:
 - Entry and exit exist and are different, inside the maze bounds.
 - The structure ensures full connectivity and no isolated cells (except the '42' pattern, see below).
 - As entry and exit are specific cells, there must be walls at the external borders.
 - Your generated data must be coherent: each neighbouring cell must have the same wall if any. E.g., it is forbidden to have a first cell with a wall on the east side, and the second cell behind that wall without a wall on the west side.
- The maze can't have large open areas. Corridors can't be wider than 2 cells. For example, you can have 2x3 or 3x2 open area, but never a 3x3 open area.
- When visually represented (see below), the maze must contain a visible "42" drawn by several fully closed cells.
- If the PERFECT flag is activated, the maze must contain **exactly one path** between the entry and the exit (i.e., it must be a perfect maze: no loops at all).
- If the PERFECT flag is **not** activated (the default), the maze must instead be a board directly **usable by a Pac-Man-like game**. Concretely:
 - every corridor is reachable (full connectivity), so the whole board can be filled with pac-gums and remains winnable;
 - the four corners and the centre are open corridors (the ghosts and super-pac-gums sit in the corners, the player starts in the centre);
 - it offers **at least two independent routes** (loops), so that a chased player always has an alternative (a perfect maze, or a perfect maze with merely one wall removed (a single loop), is therefore **not** acceptable in this mode);
 - dead-ends should stay rare (a couple are tolerated); a board with **no dead-end at all** is the ideal and is rewarded as a bonus (see the Bonuses chapter).



The "42" pattern may be omitted in case the maze size does not allow it (i.e. too small). Print an error message on the console in that case.

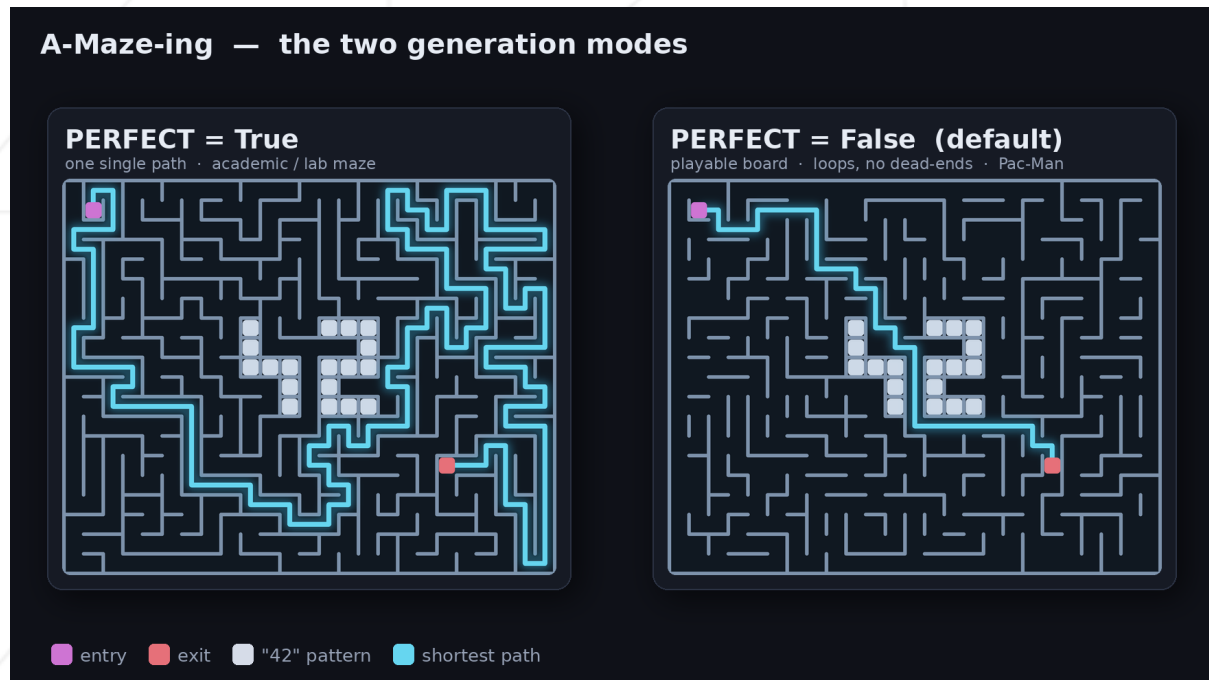

The two generation modes on the same grid: **PERFECT=True** forces a single winding path (every other corridor is a dead-end), while the default **PERFECT=False** keeps at least two independent routes open so a chased player always has an alternative. The shortest path is highlighted in both.


IV.5 Output File Format

The maze must be written in the output file using one hexadecimal digit per cell, where each digit encodes which walls are closed:

Bit	Direction
0 (LSB)	North
1	East
2	South
3	West

- A wall being closed sets the bit to 1, open means 0.
Example: 3 (binary 0011) means walls are open to the **south** and **west**. Or A (binary 1010) means that **east** and **west** walls are closed.
- Cells are stored row by row, one row per line.
- After an empty line, the following 3 elements are inserted in the output file on 3 lines:
 - the entry coordinates, the exit coordinates, and the shortest valid path from entry to exit, using the four letters **N** , **E** , **S** , **W** .
- All lines end with a `\n` .

In conjunction with its specific configuration file, this output file could be tested automatically by a Moulinette. An analysis script (`maze_analyzer.py`) is also provided with this subject. Given an output file, it checks that the wall encoding is coherent (each shared wall is encoded the same way by both neighbouring cells) and reports whether the maze is **perfect** (a single path, as required with `PERFECT=True`) or a **playable** board (no dead-ends besides the “42” pattern and several independent routes, as required by default). You may use it to check that your generator produces the mode requested by the configuration file.

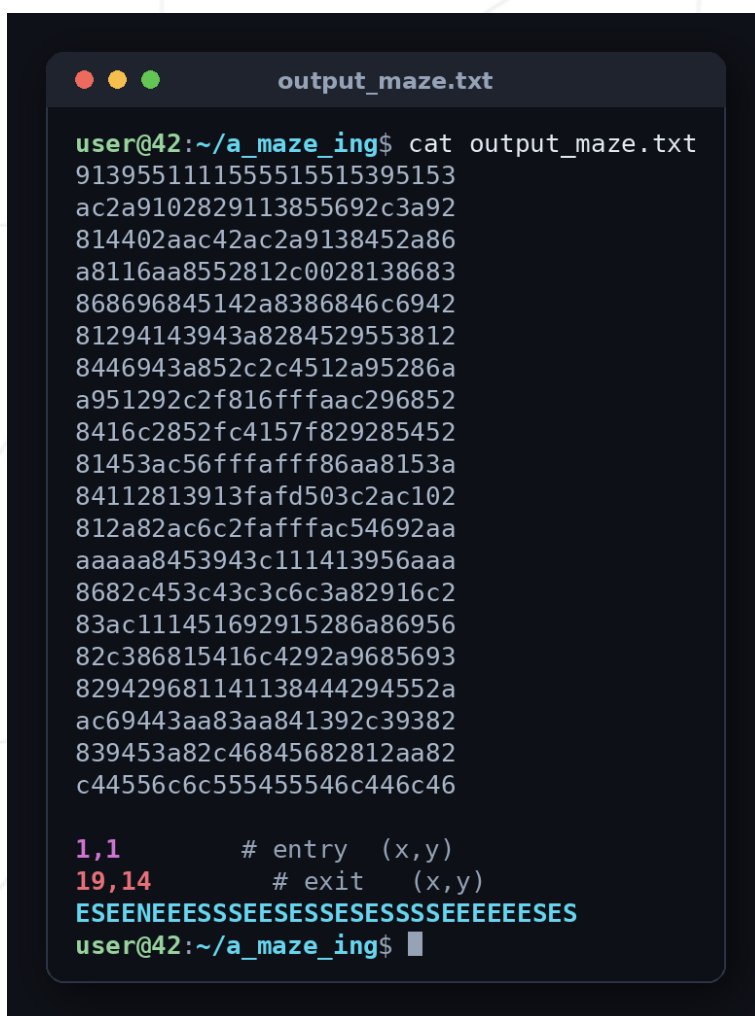A terminal window titled 'output_maze.txt' with a dark background and light-colored text. The window shows a command prompt 'user@42:~/a_maze_ing\$' followed by 'cat output_maze.txt'. The output is a long list of hexadecimal strings, each 32 characters long, representing wall encodings. At the bottom, there are two lines of metadata: '# entry (x,y)' with '1,1' and '# exit (x,y)' with '19,14'. Below these is a long string of 'E' characters, some in blue and some in green, representing the maze layout. The prompt 'user@42:~/a_maze_ing\$' is followed by a cursor.

```
user@42:~/a_maze_ing$ cat output_maze.txt
9139551111555515515395153
ac2a9102829113855692c3a92
814402aac42ac2a9138452a86
a8116aa8552812c0028138683
868696845142a8386846c6942
81294143943a8284529553812
8446943a852c2c4512a95286a
a951292c2f816fffaac296852
8416c2852fc4157f829285452
81453ac56fffafff86aa8153a
84112813913fafd503c2ac102
812a82ac6c2fafffac54692aa
aaaaa8453943c111413956aaa
8682c453c43c3c6c3a82916c2
83ac111451692915286a86956
82c386815416c4292a9685693
829429681141138444294552a
ac69443aa83aa841392c39382
839453a82c46845682812aa82
c44556c6c555455546c446c46

1,1      # entry  (x,y)
19,14    # exit   (x,y)
ESENEEESSSESESESESSSEEEEESES
user@42:~/a_maze_ing$ █
```

Output file example

Chapter V

Visual representation

Your program must provide a way to display the maze visually, using either:

- Terminal ASCII rendering, or
- A graphical display using the MiniLibX (MLX) library.

The visual should clearly show walls, entry, exit, and the solution path.


User interactions must be available while the program is running, and must include, at least, the following tasks:

- Re-generate a new maze and display it.
- Show/Hide a valid shortest path from the entrance to the exit.
- Change maze wall colours.
- Optional: set specific colours to display the “42” pattern.

You can add extra user interactions.



Terminal default rendering of the maze

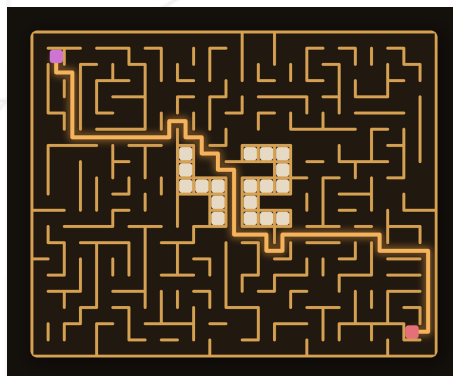

Different maze, shortest path and wall colours



Maze rendering using Mlx

Chapter VI

Code reusability requirements

You must implement the maze generation as a unique class (e.g., 'MazeGenerator') inside a standalone module that can be imported in a future project.

You must provide a short documentation describing how to:

- Instantiate and use your generator, with at least a basic example.
- Pass custom parameters (e.g., size, seed).
- Access the generated structure, and access at least a solution.



The maze generator module grants access to the maze structure, but it is not necessarily the same format as the output file.

This entire reusable module (code and documentation) must be available in a single file suitable for a later installation by `pip`.

This package must be called `mazegen-*` and the file must be located at the root of your git repository.

Both `.tar.gz` and `.whl` extensions are allowed, as generated by the standard build of a Python package.

Example of a full filename: `mazegen-1.0.0-py3-none-any.whl` .

You must provide in your Git repository all needed elements to build the package. This will be asked during the evaluation: in a `virtualenv` or equivalent, install the needed tools and build your package again from your sources.

Because this maze generator is meant to be reused in a later project, you must include a `LICENSE.md` file at the root of your repository, stating the license under which your code may be reused. Choosing and writing this license is part of the assignment: it is your first contact with software licensing and intellectual property. The license you pick must explicitly allow the reuse and distribution of your maze generator by the later project(s)

that build on it.

The main `README.md` file (not part of the reusable module) must also contain this short documentation.

Chapter VII

Readme Requirements

A `README.md` file must be provided at the root of your Git repository. Its purpose is to allow anyone unfamiliar with the project (peers, staff, recruiters, etc.) to quickly understand what the project is about, how to run it, and where to find more information on the topic.

The `README.md` must include at least:

- The very first line must be italicized and read: *This project has been created as part of the 42 curriculum by <login1>[, <login2>[, <login3>[...]]].*
- A “**Description**” section that clearly presents the project, including its goal and a brief overview.
- An “**Instructions**” section containing any relevant information about compilation, installation, and/or execution.
- A “**Resources**” section listing classic references related to the topic (documentation, articles, tutorials, etc.), as well as a description of how AI was used — specifying for which tasks and which parts of the project.

➡ **Additional sections may be required depending on the project** (e.g., usage examples, feature list, technical choices, etc.).

Any required additions will be explicitly listed below.

- The complete structure and format of your config file.
- The maze generation algorithm you chose.
- Why you chose this algorithm.
- What part of your code is reusable, and how.
- Your team and project management with:
 - The roles of each team member.

- Your anticipated planning and how it evolved until the end
- What worked well and what could be improved
- Have you used any specific tools? Which ones?

If you implement advanced features (multiple algorithms, display options), describe them in this README.md file.



English is recommended; alternatively, you may use the main language of your campus.

Chapter VIII

Bonuses

You may add various bonuses to your project. Here are possible examples:

- A default (non-perfect) maze with **no dead-end at all**: a perfectly “braided” board, so a chased player is never trapped anywhere (the provided analysis script confirms it with `--max-dead-ends 0`).
- Support multiple maze generation algorithms.
- Add animation during maze generation.

Chapter IX

Submission and peer-evaluation

Submit your assignment in your `Git` repository as usual. Only the work inside your repository will be evaluated during the defense. Don't hesitate to double-check the names of your files to ensure they are correct.

During the evaluation, a brief **modification of the project** may occasionally be requested. This could involve a minor behaviour change, a few lines of code to write or rewrite, or an easy-to-add feature.

While this step may **not be applicable to every project**, you must be prepared for it if it is mentioned in the evaluation guidelines.

This step is meant to verify your actual understanding of a specific part of the project. The modification can be performed in any development environment you choose (e.g., your usual setup), and it should be feasible within a few minutes — unless a specific time frame is defined as part of the evaluation.

You can, for example, be asked to make a small update to a function or script, modify a display, or adjust a data structure to store new information, etc.

The details (scope, target, etc.) will be specified in the **evaluation guidelines** and may vary from one evaluation to another for the same project.