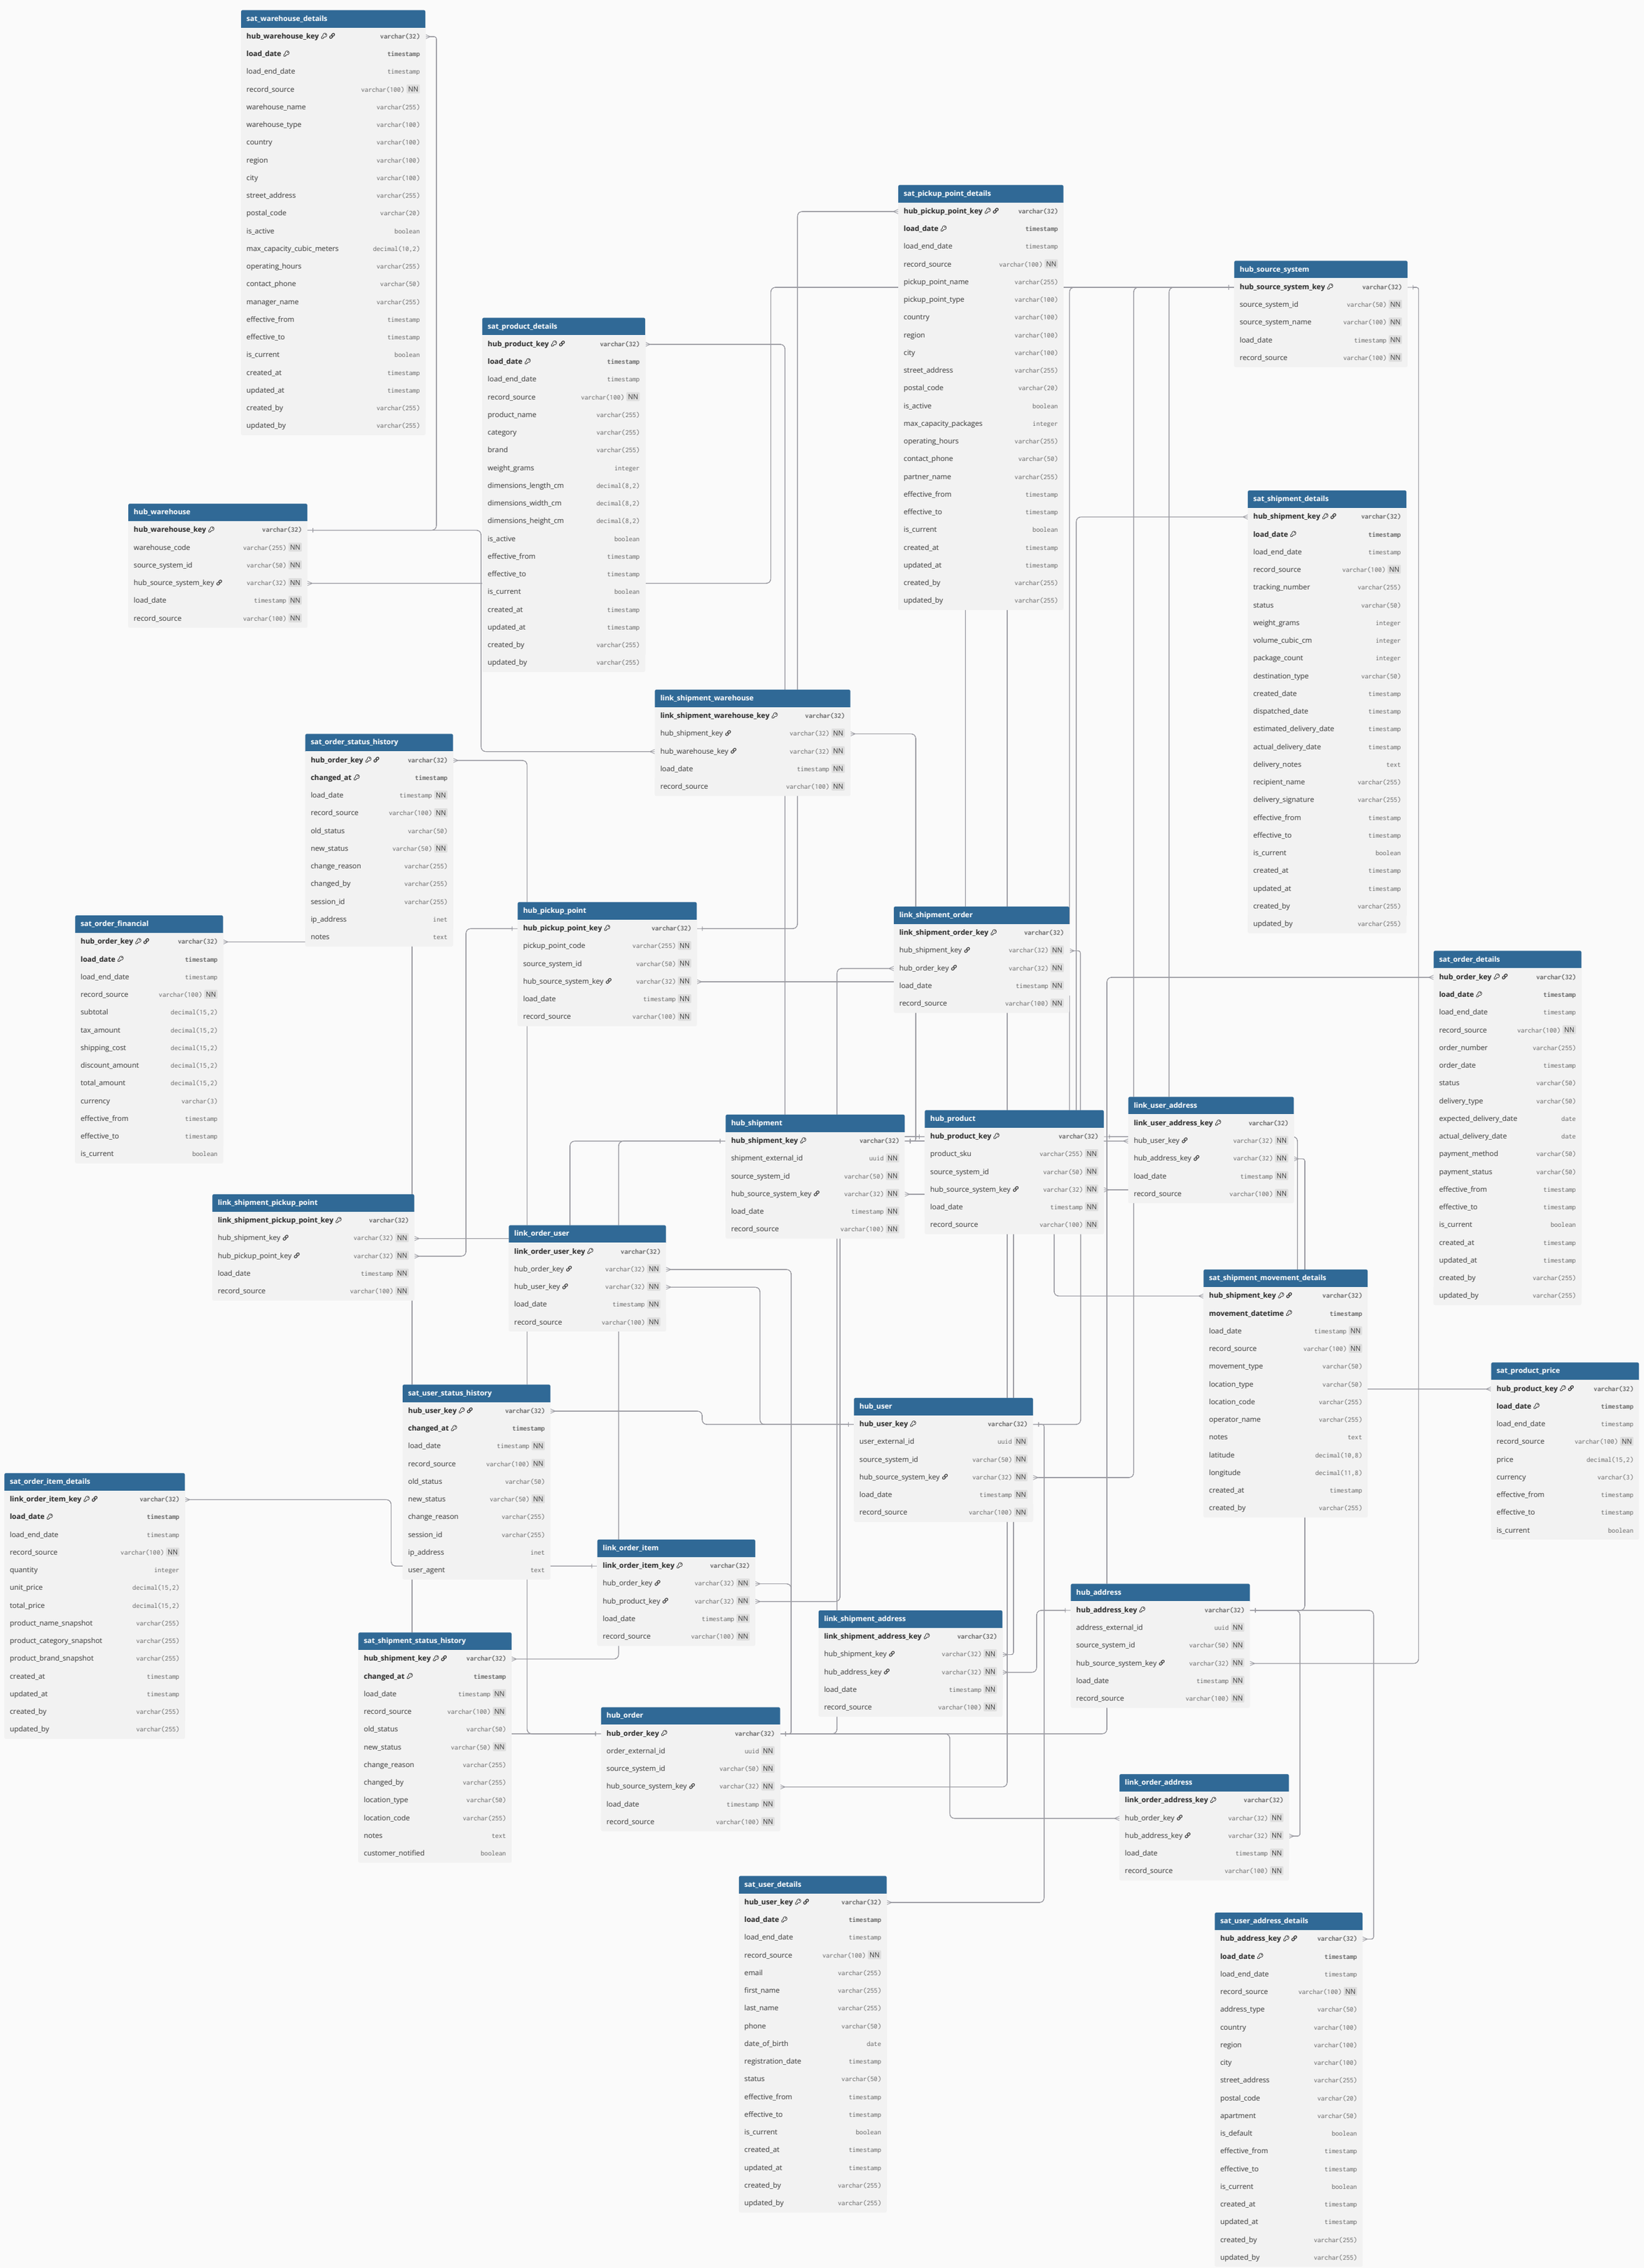
sat_warehouse_details
hub_warehouse_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
warehouse_name varchar(255)
warehouse_type varchar(100)
country varchar(100)
region varchar(100)
city varchar(100)
street_address varchar(255)
postal_code varchar(20)
is_active boolean
max_capacity_cubic_meters decimal(10,2)
operating_hours varchar(255)
contact_phone varchar(50)
manager_name varchar(255)
effective_from timestamp
effective_to timestamp
is_current boolean
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
sat_pickup_point_details
hub_pickup_point_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
pickup_point_name varchar(255)
pickup_point_type varchar(100)
country varchar(100)
region varchar(100)
city varchar(100)
street_address varchar(255)
postal_code varchar(20)
is_active boolean
max_capacity_packages integer
operating_hours varchar(255)
contact_phone varchar(50)
partner_name varchar(255)
effective_from timestamp
effective_to timestamp
is_current boolean
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
hub_source_system
hub_source_system_key varchar(32)
source_system_id varchar(50) NN
source_system_name varchar(100) NN
load_date timestamp NN
record_source varchar(100) NN
sat_product_details
hub_product_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
product_name varchar(255)
category varchar(255)
brand varchar(255)
weight_grams integer
dimensions_length_cm decimal(8,2)
dimensions_width_cm decimal(8,2)
dimensions_height_cm decimal(8,2)
is_active boolean
effective_from timestamp
effective_to timestamp
is_current boolean
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
hub_warehouse
hub_warehouse_key varchar(32)
warehouse_code varchar(255) NN
source_system_id varchar(50) NN
hub_source_system_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
sat_shipment_details
hub_shipment_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
tracking_number varchar(255)
status varchar(50)
weight_grams integer
volume_cubic_cm integer
package_count integer
destination_type varchar(50)
created_date timestamp
dispatched_date timestamp
estimated_delivery_date timestamp
actual_delivery_date timestamp
delivery_notes text
recipient_name varchar(255)
delivery_signature varchar(255)
effective_from timestamp
effective_to timestamp
is_current boolean
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
link_shipment_warehouse
link_shipment_warehouse_key varchar(32)
hub_shipment_key varchar(32) NN
hub_warehouse_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
sat_order_status_history
hub_order_key varchar(32)
changed_at timestamp
load_date timestamp NN
record_source varchar(100) NN
old_status varchar(50)
new_status varchar(50) NN
change_reason varchar(255)
changed_by varchar(255)
session_id varchar(255)
ip_address inet
notes text
hub_pickup_point
hub_pickup_point_key varchar(32)
pickup_point_code varchar(255) NN
source_system_id varchar(50) NN
hub_source_system_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
link_shipment_order
link_shipment_order_key varchar(32)
hub_shipment_key varchar(32) NN
hub_order_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
sat_order_financial
hub_order_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
subtotal decimal(15,2)
tax_amount decimal(15,2)
shipping_cost decimal(15,2)
discount_amount decimal(15,2)
total_amount decimal(15,2)
currency varchar(3)
effective_from timestamp
effective_to timestamp
is_current boolean
sat_order_details
hub_order_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
order_number varchar(255)
order_date timestamp
status varchar(50)
delivery_type varchar(50)
expected_delivery_date date
actual_delivery_date date
payment_method varchar(50)
payment_status varchar(50)
effective_from timestamp
effective_to timestamp
is_current boolean
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
link_shipment_pickup_point
link_shipment_pickup_point_key varchar(32)
hub_shipment_key varchar(32) NN
hub_pickup_point_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
hub_shipment
hub_shipment_key varchar(32)
shipment_external_id uuid NN
source_system_id varchar(50) NN
hub_source_system_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
hub_product
hub_product_key varchar(32)
product_sku varchar(255) NN
source_system_id varchar(50) NN
hub_source_system_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
link_user_address
link_user_address_key varchar(32)
hub_user_key varchar(32) NN
hub_address_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
link_order_user
link_order_user_key varchar(32)
hub_order_key varchar(32) NN
hub_user_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
sat_shipment_movement_details
hub_shipment_key varchar(32)
movement_datetime timestamp
load_date timestamp NN
record_source varchar(100) NN
movement_type varchar(50)
location_type varchar(50)
location_code varchar(255)
operator_name varchar(255)
notes text
latitude decimal(10,8)
longitude decimal(11,8)
created_at timestamp
created_by varchar(255)
sat_product_price
hub_product_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
price decimal(15,2)
currency varchar(3)
effective_from timestamp
effective_to timestamp
is_current boolean
sat_user_status_history
hub_user_key varchar(32)
changed_at timestamp
load_date timestamp NN
record_source varchar(100) NN
old_status varchar(50)
new_status varchar(50) NN
change_reason varchar(255)
session_id varchar(255)
ip_address inet
user_agent text
hub_user
hub_user_key varchar(32)
user_external_id uuid NN
source_system_id varchar(50) NN
hub_source_system_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
sat_order_item_details
link_order_item_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
quantity integer
unit_price decimal(15,2)
total_price decimal(15,2)
product_name_snapshot varchar(255)
product_category_snapshot varchar(255)
product_brand_snapshot varchar(255)
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
link_order_item
link_order_item_key varchar(32)
hub_order_key varchar(32) NN
hub_product_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
hub_address
hub_address_key varchar(32)
address_external_id uuid NN
source_system_id varchar(50) NN
hub_source_system_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
link_shipment_address
link_shipment_address_key varchar(32)
hub_shipment_key varchar(32) NN
hub_address_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
sat_shipment_status_history
hub_shipment_key varchar(32)
changed_at timestamp
load_date timestamp NN
record_source varchar(100) NN
old_status varchar(50)
new_status varchar(50) NN
change_reason varchar(255)
changed_by varchar(255)
location_type varchar(50)
location_code varchar(255)
notes text
customer_notified boolean
hub_order
hub_order_key varchar(32)
order_external_id uuid NN
source_system_id varchar(50) NN
hub_source_system_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
link_order_address
link_order_address_key varchar(32)
hub_order_key varchar(32) NN
hub_address_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
sat_user_details
hub_user_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
email varchar(255)
first_name varchar(255)
last_name varchar(255)
phone varchar(50)
date_of_birth date
registration_date timestamp
status varchar(50)
effective_from timestamp
effective_to timestamp
is_current boolean
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
sat_user_address_details
hub_address_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
address_type varchar(50)
country varchar(100)
region varchar(100)
city varchar(100)
street_address varchar(255)
postal_code varchar(20)
apartment varchar(50)
is_default boolean
effective_from timestamp
effective_to timestamp
is_current boolean
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
dbdiagram.io

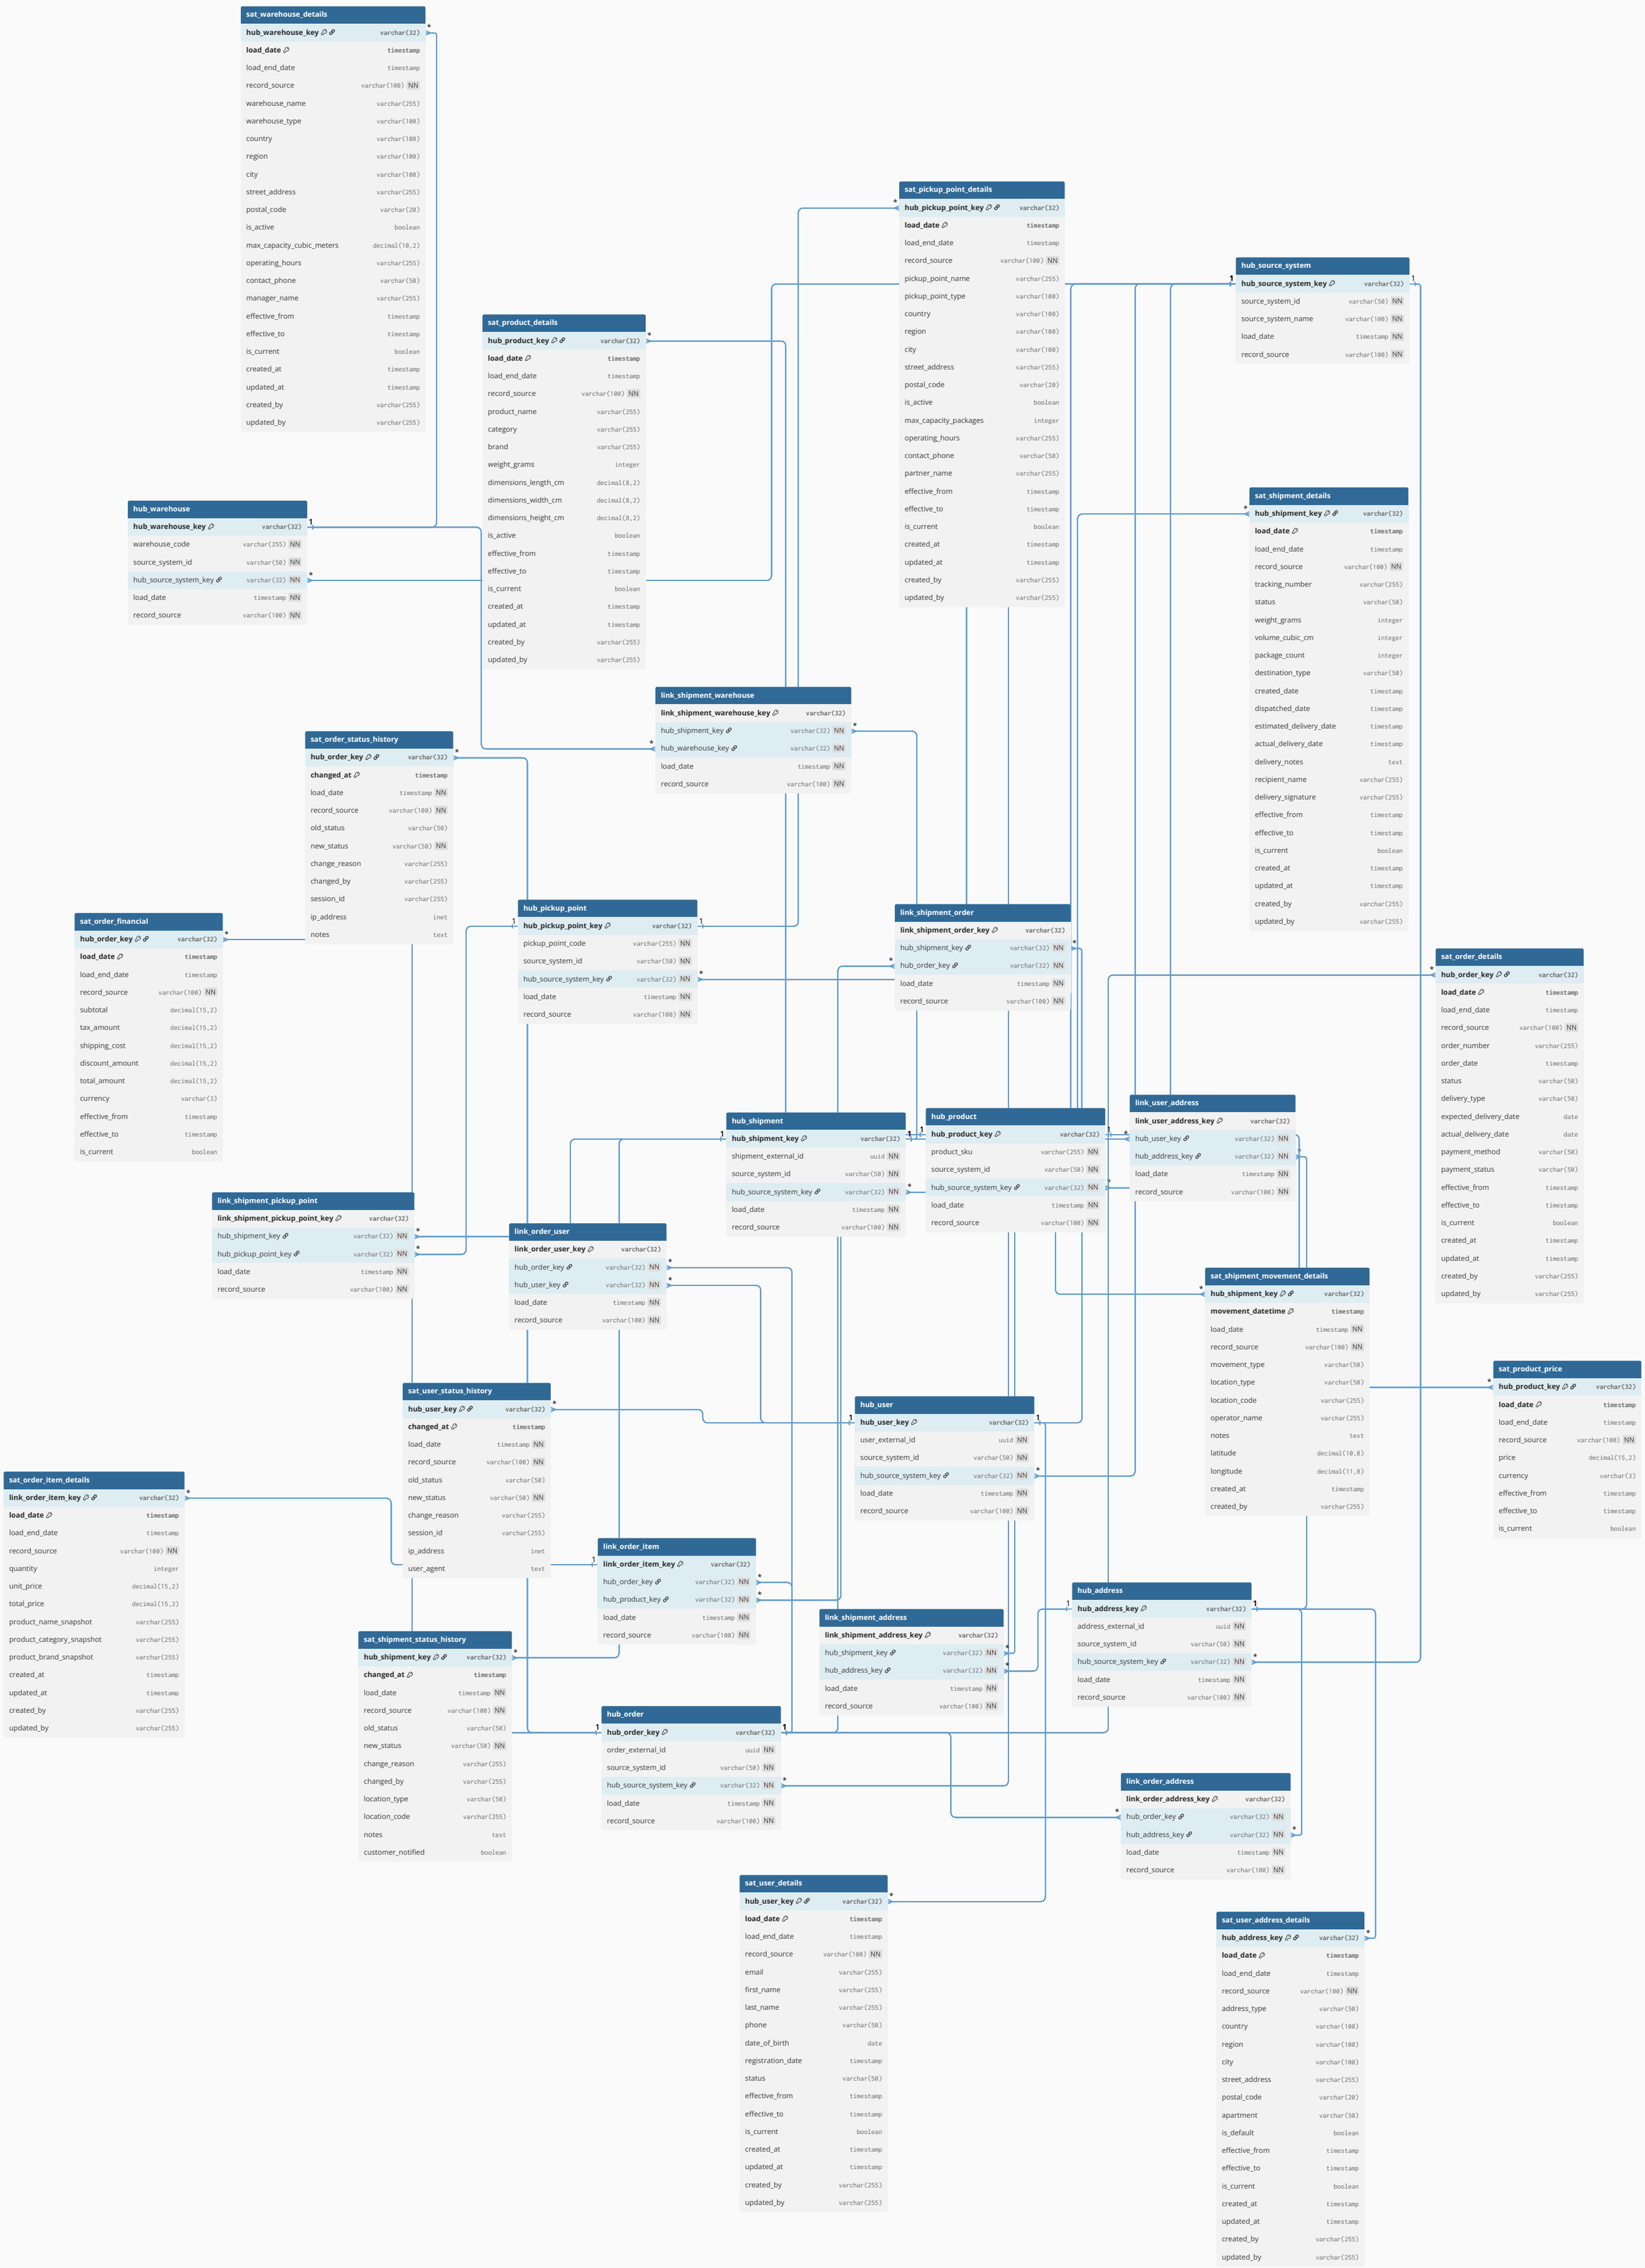
sat_warehouse_details
hub_warehouse_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
warehouse_name varchar(255)
warehouse_type varchar(100)
country varchar(100)
region varchar(100)
city varchar(100)
street_address varchar(255)
postal_code varchar(20)
is_active boolean
max_capacity_cubic_meters decimal(10,2)
operating_hours varchar(255)
contact_phone varchar(50)
manager_name varchar(255)
effective_from timestamp
effective_to timestamp
is_current boolean
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
sat_pickup_point_details
hub_pickup_point_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
pickup_point_name varchar(255)
pickup_point_type varchar(100)
country varchar(100)
region varchar(100)
city varchar(100)
street_address varchar(255)
postal_code varchar(20)
is_active boolean
max_capacity_packages integer
operating_hours varchar(255)
contact_phone varchar(50)
partner_name varchar(255)
effective_from timestamp
effective_to timestamp
is_current boolean
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
hub_source_system
hub_source_system_key varchar(32)
source_system_id varchar(50) NN
source_system_name varchar(100) NN
load_date timestamp NN
record_source varchar(100) NN
sat_product_details
hub_product_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
product_name varchar(255)
category varchar(255)
brand varchar(255)
weight_grams integer
dimensions_length_cm decimal(8,2)
dimensions_width_cm decimal(8,2)
dimensions_height_cm decimal(8,2)
is_active boolean
effective_from timestamp
effective_to timestamp
is_current boolean
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
hub_warehouse
hub_warehouse_key varchar(32)
warehouse_code varchar(255) NN
source_system_id varchar(50) NN
hub_source_system_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
sat_shipment_details
hub_shipment_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
tracking_number varchar(255)
status varchar(50)
weight_grams integer
volume_cubic_cm integer
package_count integer
destination_type varchar(50)
created_date timestamp
dispatched_date timestamp
estimated_delivery_date timestamp
actual_delivery_date timestamp
delivery_notes text
recipient_name varchar(255)
delivery_signature varchar(255)
effective_from timestamp
effective_to timestamp
is_current boolean
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
link_shipment_warehouse
link_shipment_warehouse_key varchar(32)
hub_shipment_key varchar(32) NN
hub_warehouse_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
sat_order_status_history
hub_order_key varchar(32)
changed_at timestamp
load_date timestamp NN
record_source varchar(100) NN
old_status varchar(50)
new_status varchar(50) NN
change_reason varchar(255)
changed_by varchar(255)
session_id varchar(255)
ip_address inet
notes text
sat_order_financial
hub_order_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
subtotal decimal(15,2)
tax_amount decimal(15,2)
shipping_cost decimal(15,2)
discount_amount decimal(15,2)
total_amount decimal(15,2)
currency varchar(3)
effective_from timestamp
effective_to timestamp
is_current boolean
hub_pickup_point
hub_pickup_point_key varchar(32)
pickup_point_code varchar(255) NN
source_system_id varchar(50) NN
hub_source_system_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
link_shipment_order
link_shipment_order_key varchar(32)
hub_shipment_key varchar(32) NN
hub_order_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
sat_order_details
hub_order_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
order_number varchar(255)
order_date timestamp
status varchar(50)
delivery_type varchar(50)
expected_delivery_date date
actual_delivery_date date
payment_method varchar(50)
payment_status varchar(50)
effective_from timestamp
effective_to timestamp
is_current boolean
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
link_shipment_pickup_point
link_shipment_pickup_point_key varchar(32)
hub_shipment_key varchar(32) NN
hub_pickup_point_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
hub_shipment
hub_shipment_key varchar(32)
shipment_external_id uuid NN
source_system_id varchar(50) NN
hub_source_system_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
hub_product
hub_product_key varchar(32)
product_sku varchar(255) NN
source_system_id varchar(50) NN
hub_source_system_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
link_user_address
link_user_address_key varchar(32)
hub_user_key varchar(32) NN
hub_address_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
link_order_user
link_order_user_key varchar(32)
hub_order_key varchar(32) NN
hub_user_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
sat_shipment_movement_details
hub_shipment_key varchar(32)
movement_datetime timestamp
load_date timestamp NN
record_source varchar(100) NN
movement_type varchar(50)
location_type varchar(50)
location_code varchar(255)
operator_name varchar(255)
notes text
latitude decimal(10,8)
longitude decimal(11,8)
created_at timestamp
created_by varchar(255)
sat_product_price
hub_product_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
price decimal(15,2)
currency varchar(3)
effective_from timestamp
effective_to timestamp
is_current boolean
sat_user_status_history
hub_user_key varchar(32)
changed_at timestamp
load_date timestamp NN
record_source varchar(100) NN
old_status varchar(50)
new_status varchar(50) NN
change_reason varchar(255)
session_id varchar(255)
ip_address inet
user_agent text
hub_user
hub_user_key varchar(32)
user_external_id uuid NN
source_system_id varchar(50) NN
hub_source_system_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
sat_order_item_details
link_order_item_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
quantity integer
unit_price decimal(15,2)
total_price decimal(15,2)
product_name_snapshot varchar(255)
product_category_snapshot varchar(255)
product_brand_snapshot varchar(255)
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
link_order_item
link_order_item_key varchar(32)
hub_order_key varchar(32) NN
hub_product_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
hub_address
hub_address_key varchar(32)
address_external_id uuid NN
source_system_id varchar(50) NN
hub_source_system_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
link_shipment_address
link_shipment_address_key varchar(32)
hub_shipment_key varchar(32) NN
hub_address_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
sat_shipment_status_history
hub_shipment_key varchar(32)
changed_at timestamp
load_date timestamp NN
record_source varchar(100) NN
old_status varchar(50)
new_status varchar(50) NN
change_reason varchar(255)
changed_by varchar(255)
location_type varchar(50)
location_code varchar(255)
notes text
customer_notified boolean
hub_order
hub_order_key varchar(32)
order_external_id uuid NN
source_system_id varchar(50) NN
hub_source_system_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
link_order_address
link_order_address_key varchar(32)
hub_order_key varchar(32) NN
hub_address_key varchar(32) NN
load_date timestamp NN
record_source varchar(100) NN
sat_user_details
hub_user_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
email varchar(255)
first_name varchar(255)
last_name varchar(255)
phone varchar(50)
date_of_birth date
registration_date timestamp
status varchar(50)
effective_from timestamp
effective_to timestamp
is_current boolean
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
sat_user_address_details
hub_address_key varchar(32)
load_date timestamp
load_end_date timestamp
record_source varchar(100) NN
address_type varchar(50)
country varchar(100)
region varchar(100)
city varchar(100)
street_address varchar(255)
postal_code varchar(20)
apartment varchar(50)
is_default boolean
effective_from timestamp
effective_to timestamp
is_current boolean
created_at timestamp
updated_at timestamp
created_by varchar(255)
updated_by varchar(255)
dbdiagram.io