


Cisco Packet Tracer Interface

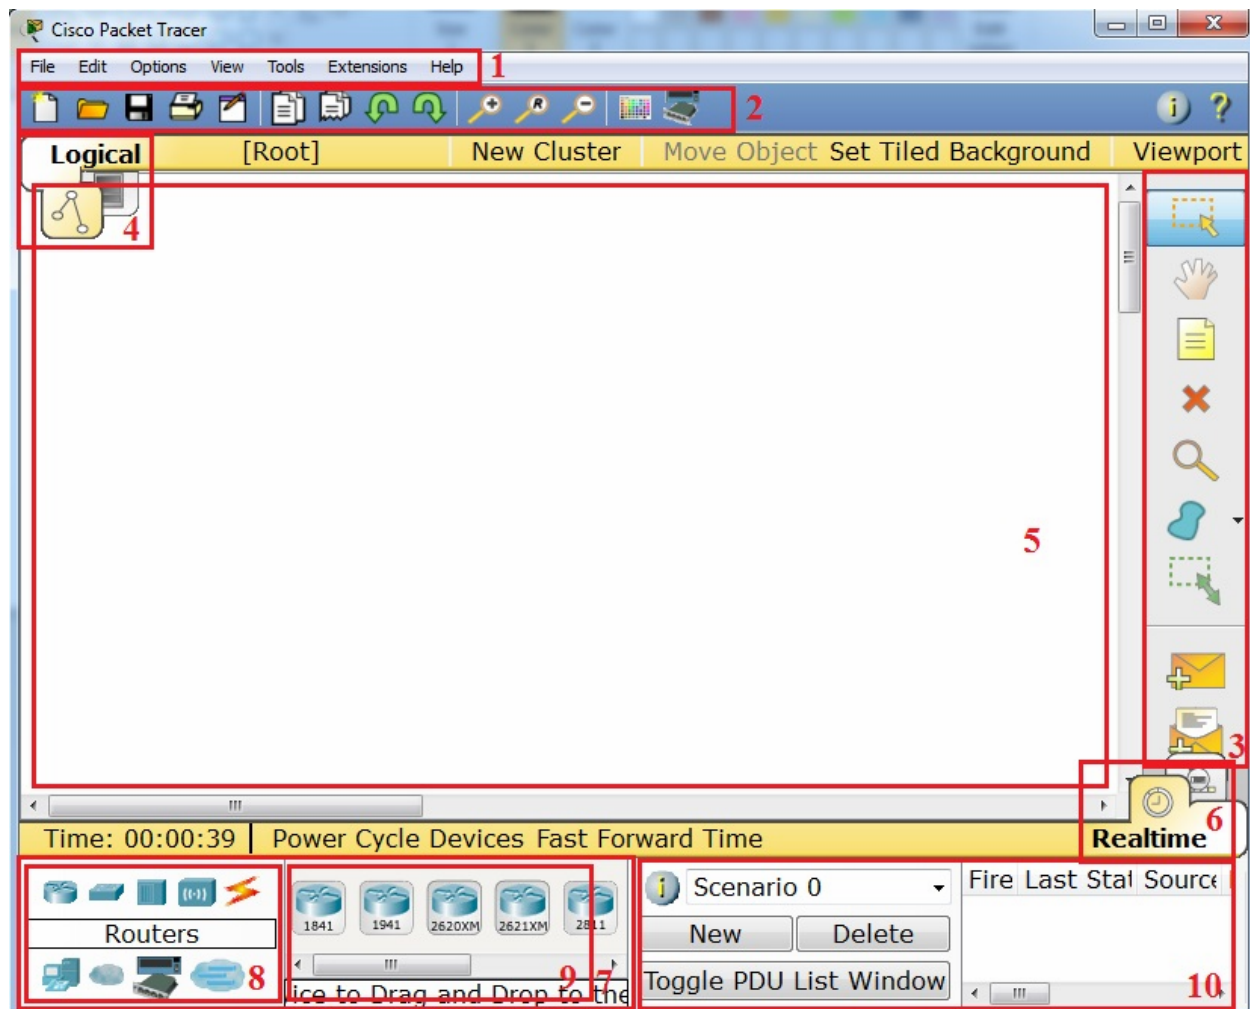

1	Menu Bar	This bar provides the File , Edit , Options , View , Tools , Extensions , and Help menus. You will find basic commands such as Open , Save , Save as Pkz , Print , and Preferences in these menus. You will also be able to access the Activity Wizard from the Extensions menu.
2	Main Tool Bar	This bar provides shortcut icons to the File and Edit menu commands. This bar also provides buttons for Copy , Paste , Undo , Redo , Zoom , the Drawing Palette , and the Custom Devices Dialog . On the right, you will also find the Network Information button, which you can use to enter a description for the current network (or any text you wish to include).
3	Common Tools Bar	This bar provides access to these commonly used workspace

		tools: Select , Move , Layout , Place , Note , Delete , Inspect , Resize Shape , Add Simple PDU , and Add Complex PDU . See “Workspace Basics” for more information.
4	Logical/Physical Workspace and Navigation Bar	You can toggle between the Physical Workspace and the Logical Workspace with the tabs on this bar. In Logical Workspace, this bar also allows you to go back to a previous level in a cluster, create a New Cluster , Move Object , Set Tiled Background , and Viewport . In Physical Workspace, this bar allows you to navigate through physical locations, create a New City , create a New Building , create a New Closet , Move Object , apply a Grid to the background, Set Background , and go to the Working Closet .
5	Workspace	This area is where you will create your network, watch simulations, and view many kinds of information and statistics.
6	Realtime/Simulation Bar	You can toggle between Realtime Mode and Simulation Mode with the tabs on this bar. This bar also provides buttons to Power Cycle Devices and Fast Forward Time as well as the Play Control buttons and the Event List toggle button in Simulation Mode. Also, it contains a clock that displays the relative Time in Realtime Mode and Simulation Mode.
7	Network Component Box	This box is where you choose devices and connections to put into the workspace. It contains the Device-Type Selection Box and the Device-Specific Selection Box.
8	Device-Type Selection Box	This box contains the type of devices and connections available in Packet Tracer. The Device-Specific Selection Box will change depending on which type of device you choose.
9	Device-Specific Selection Box	This box is where you choose specifically which devices you want to put in your network and which connections to make.
10	User Created Packet Window*	This window manages the packets you put in the network during simulation scenarios. See the “Simulation Mode” section for more details.

User Modes in Cisco Packet Tracer

What is the difference between user mode and privileged mode?

User EXEC level allows you to access only basic monitoring commands; privileged EXEC level allows you to access all router commands. Privileged EXEC level can be password protected to allow only authorized users the ability to configure or manage the router.

Mode	Symbol	How to access this mode	Command for leaving this mode
User EXEC Mode	Router >	Default mode after booting. Press enter for accessing this.	Use exit command
Privileged EXEC mode	Router #	Use enable command from user exec mode for entering into this mode	exit
Global Configuration mode	Router(config)#	Use configure terminal command from privileged exec mode	Exit or Ctrl+Z for user EXEC mode
Interface Configuration	Router(config-if)#	Use interface <interface name+number> command from global configuration mode	Use exit command to return in global mode

How to Change the Cisco Switch or Router name

You can change the cisco router name by using command **hostname** in global configuration mode.

```
Router(config)#hostname HR-Router
HR-Router(config)#
```

Configure password encryption.

Router(config)# service password-encryption

How to set the Enable password:

You can set the password for protecting enable mode by following command:
(Following command will set the password to cisco)

```
Router(config)#enable secret Cisco
Router(config)#exit
Router>en
Password:
Router#
```

Erase the startup configuration file from NVRAM.

Router# erase startup-config

Reload the router to remove an old configuration from memory.

Router# reload

How to save the configurations:

You can use the following command for router configuration to Nvram for use at next boot up

Router#**copy running-config startup-config**

How to set the IP address to Cisco interface:

You can set the IP address to any Cisco device interface by using the following commands:

```
Router(config)#interface <interface name & number>
Router(config-if)#ip address <IP address> <subnet mask>
```

How to enable a port or interface

Router(config-if)#**no shut**

How to create a static route on Cisco router

Router(config-router)#**ip route [destination_network] [mask] [next-hop_address]**

Router(config-router)#**ip route 192.132.23.1 255.255.255.0 10.10.10.1**

How to configure the default route on Cisco:

Following command will set the default route to 10.10.10.101.

Router(config)# ip route 0.0.0.0 0.0.0.0 10.10.10.101

Famous Show Commands in Privileged EXEC Mode

You can run all these command for checking different setting of Cisco device in privileged EXEC mode:

Show version

Show running-config

Show interface <interface name>

show ip route

Show Vlan

Show protocols

Show startup-config

.....

And more