

Cucumber Report

Mar 29, 2024, 1:41:08 PM

Start : Mar 29, 1:41:02.310 PM

End : Mar 29, 1:41:07.465 PM

Duration : 5.155 s

Features

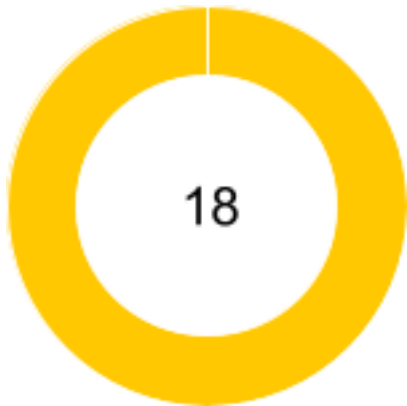
Scenarios

Steps

PASSED - 0
FAILED - 2
SKIPPED - 0

PASSED - 0
FAILED - 6
SKIPPED - 0

PASSED - 0
FAILED - 0
SKIPPED - 18

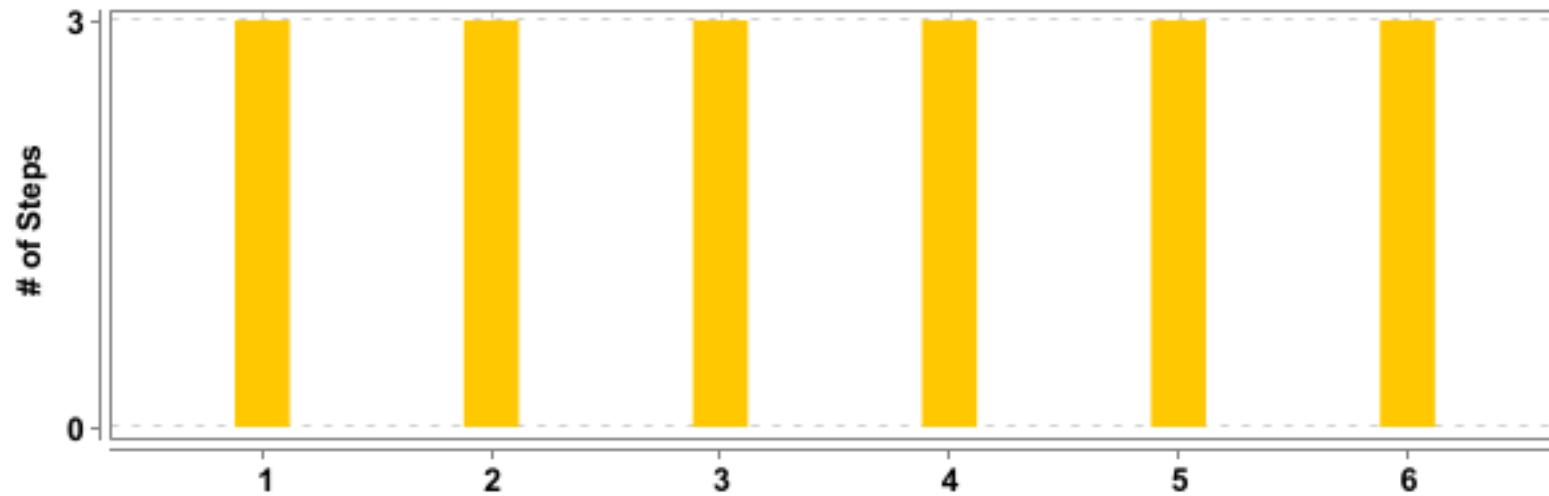


| Feature | | Scenario | | | | Step | | | |
|------------------------------|----------|----------|---|---|---|------|---|---|---|
| Name | Duration | T | P | F | S | T | P | F | S |
| <u>User Login to LMS API</u> | 4.305 s | 3 | 0 | 3 | 0 | 9 | 0 | 0 | 9 |
| <u>User Logout LMS API</u> | 0.830 s | 3 | 0 | 3 | 0 | 9 | 0 | 0 | 9 |

| Tag | Scenario | | | | Feature | | | |
|-------------------------------------|-----------------|----------|----------|----------|----------------|----------|----------|----------|
| Name | T | P | F | S | T | P | F | S |
| @UserLogin_Generate_Token | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @UserLogin_Invalid_Endpoint | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @UserLogin_Invalid_Credentials | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @UserLogout_Successful | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @UserLogout_Invalid_EndPoint | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @UserLogout_With_NoAuthorizationSet | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |





| # | Feature Name | T | P | F | S | Duration |
|---|-----------------------|---|---|---|---|----------|
| 1 | User Login to LMS API | 3 | 0 | 3 | 0 | 4.305 s |
| 2 | User Logout LMS API | 3 | 0 | 3 | 0 | 0.830 s |

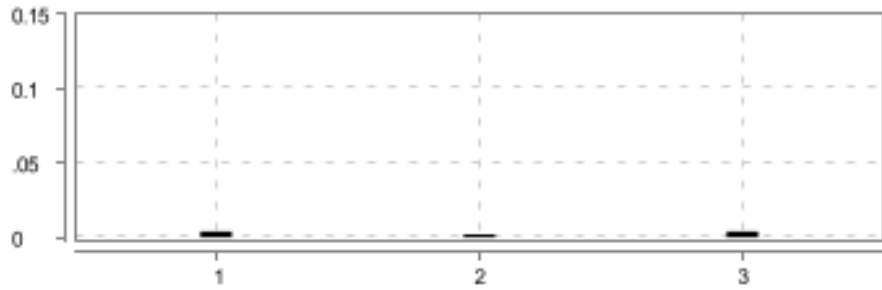



| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|------------------------------|---|---|---|---|---|----------|
| 1 | <u>User Login to LMS API</u> | <u>Check if Admin able to generate token with valid credential</u> | 3 | 0 | 0 | 3 | 3.619 s |
| 2 | <u>User Login to LMS API</u> | <u>Check if Admin able to generate token with invalid endpoint</u> | 3 | 0 | 0 | 3 | 0.288 s |
| 3 | <u>User Login to LMS API</u> | <u>Check if Admin able to generate token with invalid credentials</u> | 3 | 0 | 0 | 3 | 0.270 s |
| 4 | <u>User Logout LMS API</u> | <u>Check if Admin able to logout</u> | 3 | 0 | 0 | 3 | 0.270 s |
| 5 | <u>User Logout LMS API</u> | <u>Check if Admin able to logout with invalid endpoint</u> | 3 | 0 | 0 | 3 | 0.285 s |
| 6 | <u>User Logout LMS API</u> | <u>Check if Admin able to logout</u> | 3 | 0 | 0 | 3 | 0.245 s |

User Login to LMS API

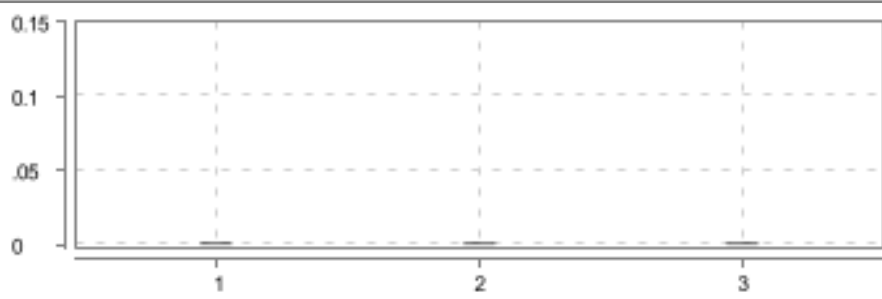

| | | | | | |
|--------------------------------------|--------------------|--|---|--|---|
| FAILED | DURATION - 4.305 s | Scenarios Total - 3 Pass - 0 Fail - 3 Skip - 0 |  | Steps Total - 9 Pass - 0 Fail - 0 Skip - 9 |  |
| / 1:41:02.310 PM // 1:41:06.615 PM / | | | | | |
| | | | | | |

Check if Admin able to generate token with valid credential

| | | | | | | |
|--------------------------------------|--|--------------------|--|--|--|---|
| FAILED | | DURATION - 3.619 s | |  | Steps Total - 3 Pass - 0 Fail - 0 Skip - 3 |  |
| / 1:41:02.313 PM // 1:41:05.932 PM / | | | | | | |
| User Login to LMS API | | | | | | |
| @UserLogin_Generate_Token | | | | | | |

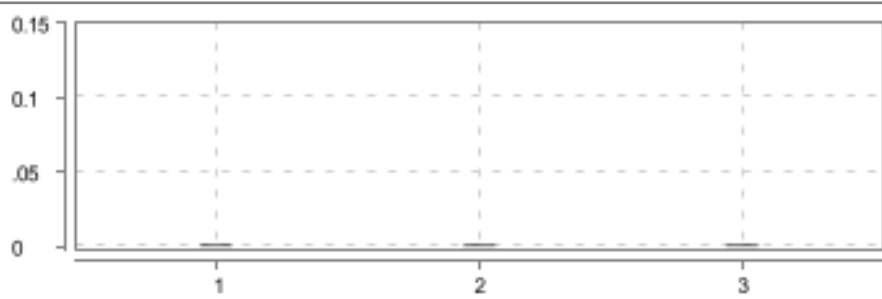

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | BEFORE - api.BackgroundHooks.BackgroundHooks.set(io.cucumber.java.Scenario) | FAILED | 3.462 s |
| | java.lang.NullPointerException at api.Request.UserLoginRequest.postLogin(UserLoginRequest.java:47) at api.BackgroundHooks.BackgroundHooks.set(BackgroundHooks.java:65) | | |
| 1 | Given Admin creates request with valid credentials | SKIPPED | 0.004 s |
| 2 | When Admin calls Post Https method with valid endpoint | SKIPPED | 0.002 s |
| 3 | Then Admin receives 200 created with auto generated token | SKIPPED | 0.004 s |

Check if Admin able to generate token with invalid endpoint

| | | | | |
|---|--|--|---|---|
| <div>FAILED</div> <div>DURATION - 0.288 s</div> | |  | <div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 3</div> |  |
| / 1:41:06.035 PM // 1:41:06.323 PM / | | | | |
| User Login to LMS API | | | | |
| @UserLogin_Invalid_Endpoint | | | | |



| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | BEFORE - api.BackgroundHooks.BackgroundHooks.set(io.cucumber.java.Scenario) | FAILED | 0.271 s |
| | java.lang.NullPointerException at api.Request.UserLoginRequest.postLogin(UserLoginRequest.java:47) at api.BackgroundHooks.BackgroundHooks.set(BackgroundHooks.java:65) | | |
| 1 | Given Admin creates request with valid credentials | SKIPPED | 0.001 s |
| 2 | When Admin calls Post Https method with invalid endpoint | SKIPPED | 0.001 s |
| 3 | Then Admin receives 401 unauthorized | SKIPPED | 0.001 s |

Check if Admin able to generate token with invalid credentials

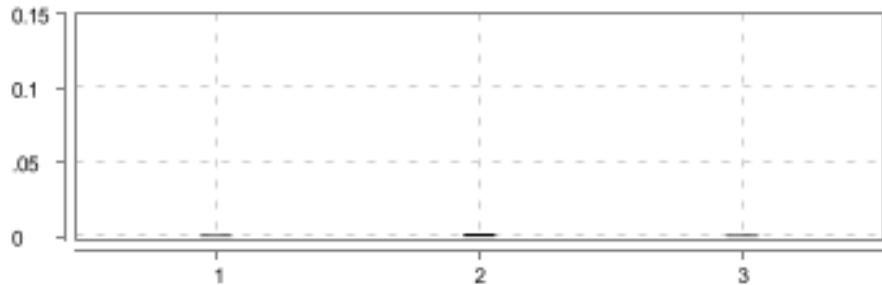

| | | | | |
|---|--|---|---|--|
| <div>FAILED</div> <div>DURATION - 0.270 s</div> | |  | <div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 3</div> |  |
| / 1:41:06.345 PM // 1:41:06.615 PM / | | | | |
| User Login to LMS API | | | | |
| @UserLogin_Invalid_Credentials | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | BEFORE - api.BackgroundHooks.BackgroundHooks.set(io.cucumber.java.Scenario) | FAILED | 0.260 s |
| | java.lang.NullPointerException at api.Request.UserLoginRequest.postLogin(UserLoginRequest.java:47) at api.BackgroundHooks.BackgroundHooks.set(BackgroundHooks.java:65) | | |
| 1 | Given Admin creates request with invalid credentials | SKIPPED | 0.001 s |
| 2 | When Admin calls Post Https method with valid endpoint | SKIPPED | 0.001 s |
| 3 | Then Admin receives 400 Bad request | SKIPPED | 0.001 s |

User Logout LMS API

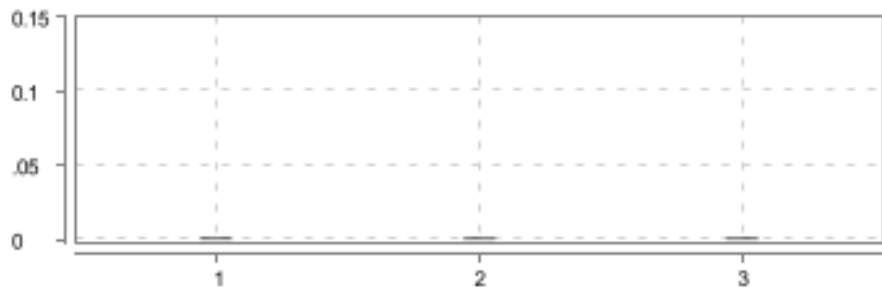

| | | | | | |
|--------------------------------------|--------------------|-----------|---|-----------|---|
| FAILED | DURATION - 0.830 s | Scenarios |  | Steps |  |
| / 1:41:06.635 PM // 1:41:07.465 PM / | | Total - 3 | | Total - 9 | |
| | | Pass - 0 | | Pass - 0 | |
| | | Fail - 3 | | Fail - 0 | |
| | | Skip - 0 | | Skip - 9 | |

Check if Admin able to logout

| | | | | |
|---|--|--|---|---|
| <div>FAILED</div> <div>DURATION - 0.270 s</div> | |  | <div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 3</div> |  |
| / 1:41:06.635 PM // 1:41:06.905 PM / | | | | |
| User Logout LMS API | | | | |
| @UserLogout_Successful | | | | |

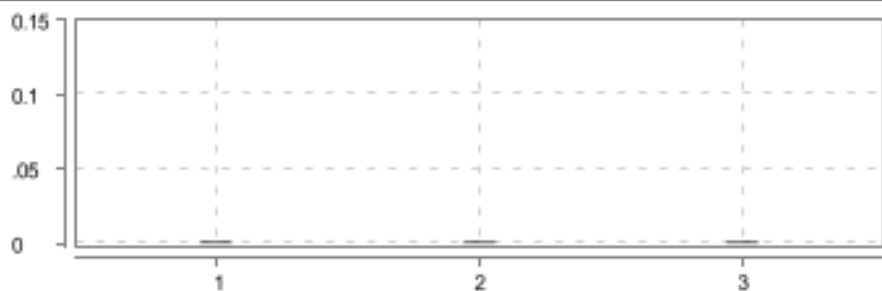

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | BEFORE - api.BackgroundHooks.BackgroundHooks.set(io.cucumber.java.Scenario) | FAILED | 0.258 s |
| | java.lang.NullPointerException at api.Request.UserLoginRequest.postLogin(UserLoginRequest.java:47) at api.BackgroundHooks.BackgroundHooks.set(BackgroundHooks.java:65) | | |
| 1 | Given Admin creates request | SKIPPED | 0.001 s |
| 2 | When Admin calls Get Https method with valid endpoint | SKIPPED | 0.002 s |
| 3 | Then Admin receives 200 ok and response with "Logout successful" | SKIPPED | 0.001 s |

Check if Admin able to logout with invalid endpoint

| | | | | |
|---|--|--|---|---|
| <div>FAILED</div> <div>DURATION - 0.285 s</div> | |  | <div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 3</div> |  |
| / 1:41:06.920 PM // 1:41:07.205 PM / | | | | |
| User Logout LMS API | | | | |
| @UserLogout_Invalid_EndPoint | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | BEFORE - api.BackgroundHooks.BackgroundHooks.set(io.cucumber.java.Scenario) | FAILED | 0.271 s |
| | java.lang.NullPointerException at api.Request.UserLoginRequest.postLogin(UserLoginRequest.java:47) at api.BackgroundHooks.BackgroundHooks.set(BackgroundHooks.java:65) | | |
| 1 | Given Admin creates request | SKIPPED | 0.001 s |
| 2 | When Admin calls Get Https method with invalid endpoint | SKIPPED | 0.001 s |
| 3 | Then Admin receives 404 Not found | SKIPPED | 0.001 s |

Check if Admin able to logout

| | | | | |
|--------------------------------------|--------------------|---|---|--|
| FAILED | DURATION - 0.245 s |  | <div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 3</div> |  |
| / 1:41:07.220 PM // 1:41:07.465 PM / | | | | |
| User Logout LMS API | | | | |
| @UserLogout_With_NoAuthorizationSet | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | BEFORE - api.BackgroundHooks.BackgroundHooks.set(io.cucumber.java.Scenario) | FAILED | 0.237 s |
| | java.lang.NullPointerException at api.Request.UserLoginRequest.postLogin(UserLoginRequest.java:47) at api.BackgroundHooks.BackgroundHooks.set(BackgroundHooks.java:65) | | |
| 1 | Given Admin creates request with no authorization | SKIPPED | 0.001 s |
| 2 | When Admin calls Get Https method with valid endpoint | SKIPPED | 0.001 s |
| 3 | Then Admin receives 401 unauthorized | SKIPPED | 0.001 s |