


使用SDK注意事项

概述：

本次SDK升级请您添加UTDID.framework, 在编译时去除 armv7s架构; 这一变动对您的APP支持设备没有任何影响, 请 放心使用。具体流程如下：

1 打开app选中targetBuild Settings->Architectures 检查Architectures 中 只保留armv7, arm64 检查Valid Architectures中 只保留armv7, arm64 如下图：

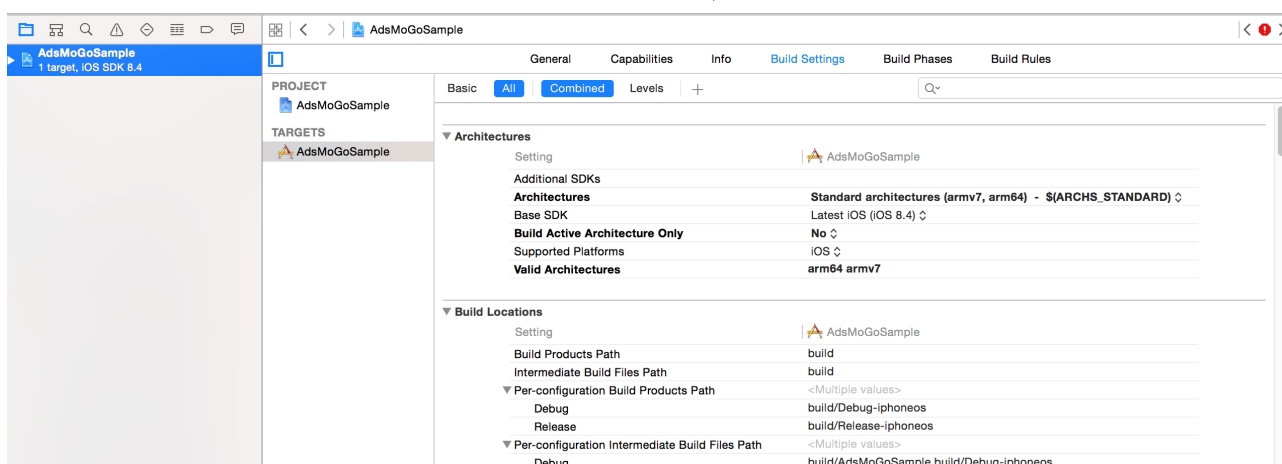


2 检查工程中是否添加 UTDID.framework 这个 framework：

检查方法：打开 app 选中 target->Build Phaese->Link Binary With Libraries 是否添加 UTDID.framework, 如果未添加, 请 添加上。


这个framework 在芒果 SDK 的中的位置 AdsMoGoLib/ AdsMoGoSDK 下。

3 如何添加 UTDID.framework 如何添加 UTDID.framework, 首先选中target->Build Phaese-


>Link Binary With Libraries下找到这样的+ 如下图:

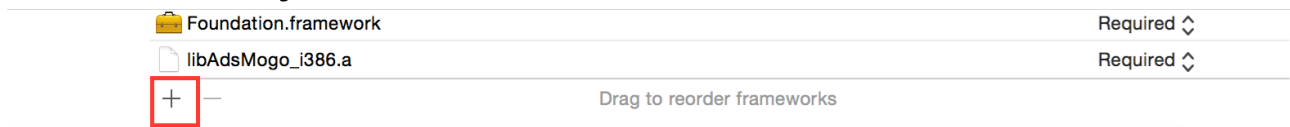

点击上图中+出现下图:

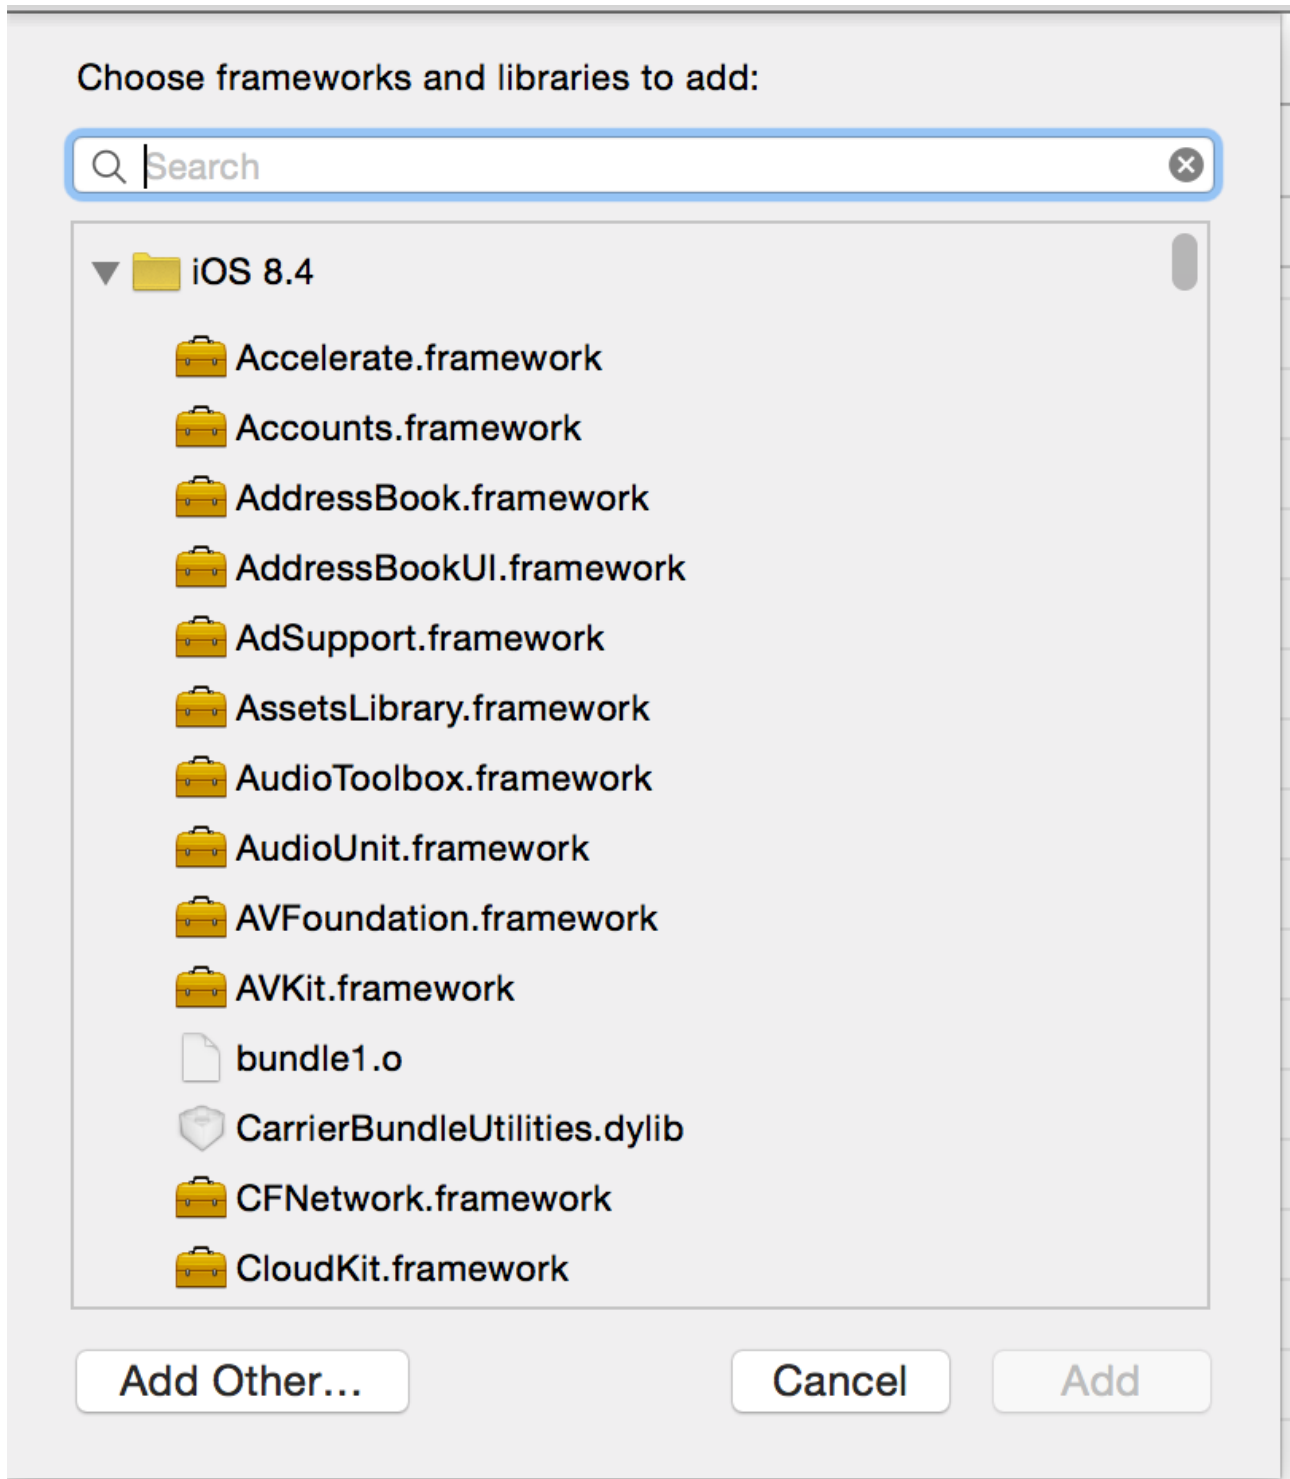

选择Add Other... 找到芒果SDK的中的位置AdsMoGoLib/AdsMoGoSDK下选择UTDID.framework 点击Open如下图, 添加到xcode工程中。

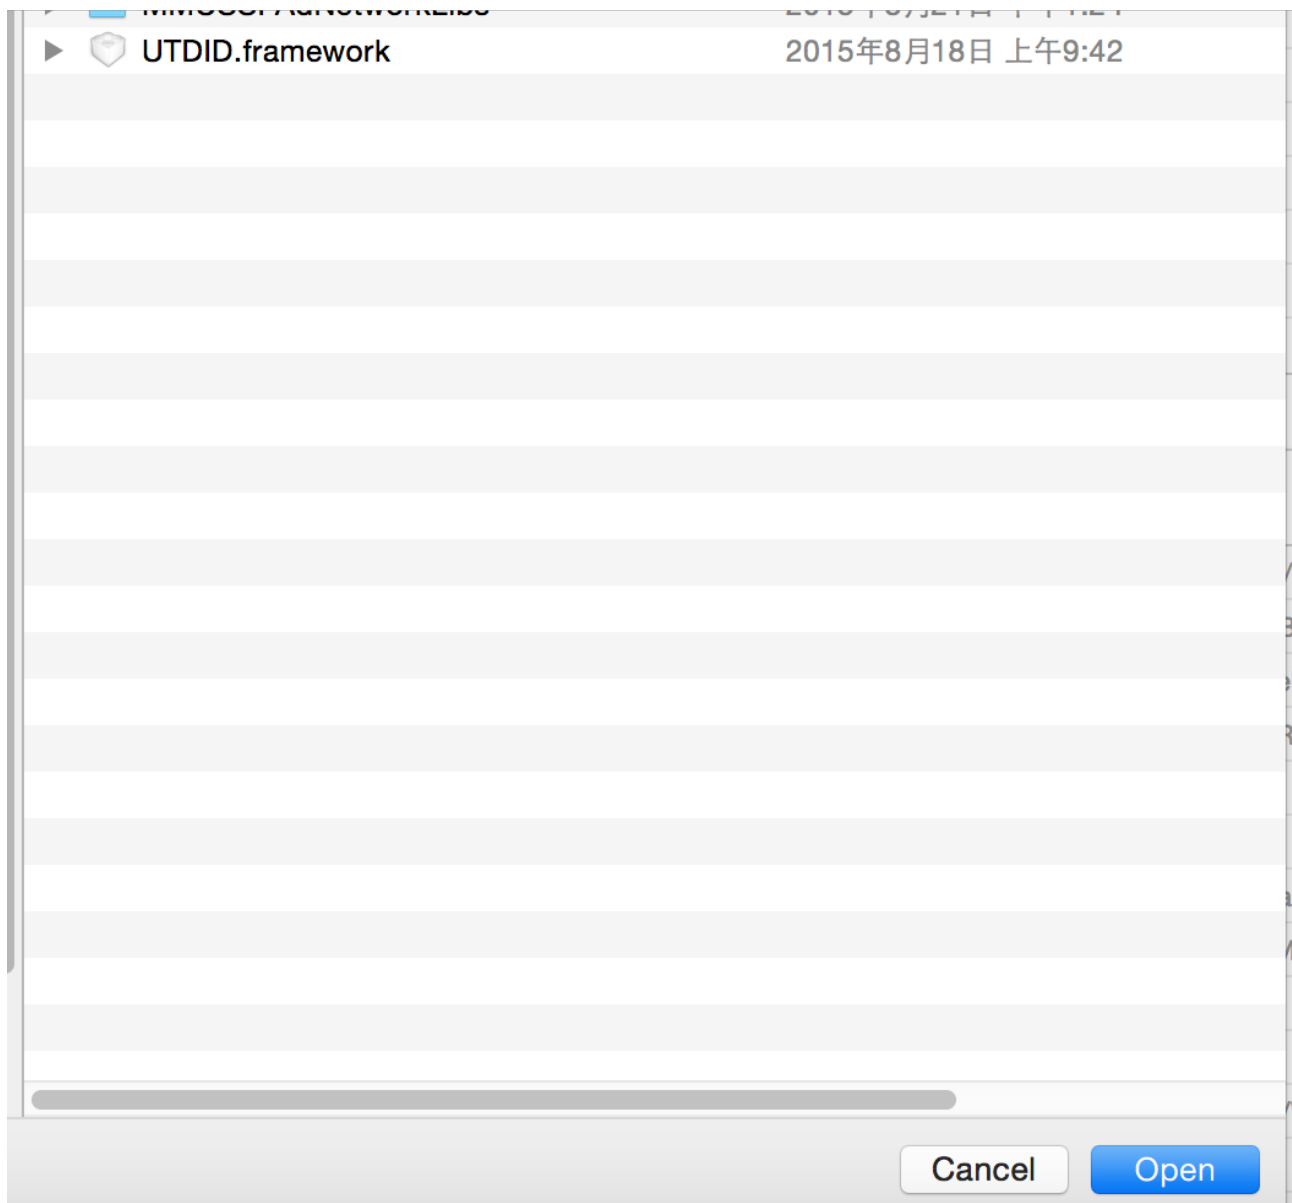

4 在Xcode7中开发APP, 需要在工程中info.plist配置中改用 下面的 XML 源码:


否则无法在iOS9中正常使用广告。

```
<key>NSAppTransportSecurity</key> <dict>
<key>NSAllowsArbitraryLoads</key> <true/>
</dict>
```

5 如果使用广告物料中的下载延伸设置并且使用了 Xcode7 开发, 请在开发 App 的 info.plist 中添加如下配置, 否则无法在 iOS9 中正常使用此功能。

```
<key>LSApplicationQueriesSchemes</key> <array>
<string>urlscheme</string> <string>urlscheme2</string> </array>
```

urlscheme 与 下图中的应用标识对应。

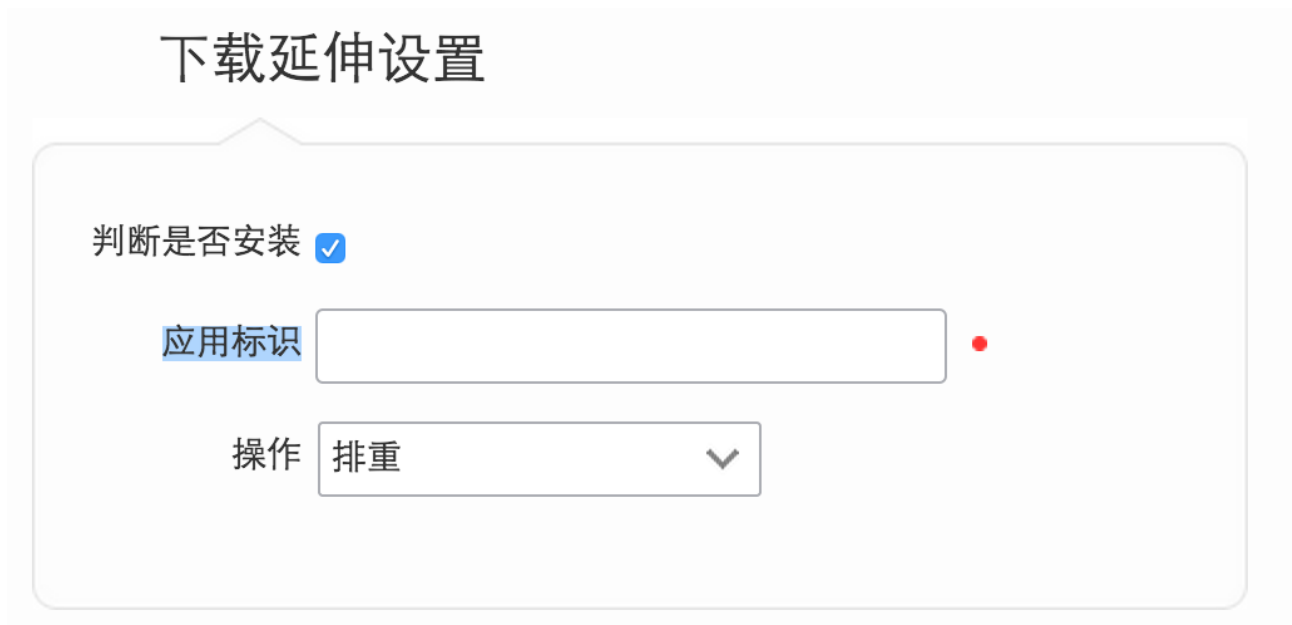


例如:应用标识 weixin://121232w, urlscheme 应该为 weixin; 应用标识 taobao://jajs12, urlscheme 应该为 taobao

6 如果使用Xcode7 编译出现类似如下问题,

```
ld: '/Users/hale/Downloads/未命名文件夹676766/UTDID.framework/UTDID(AidManager.o)' does not contain bitcode. You must rebuild it with bitcode enabled (Xcode setting ENABLE_BITCODE), obtain an updated library from the vendor, or disable bitcode for this target. for architecture armv7
clang: error: linker command failed with exit code 1 (use -v to see invocation)
```

请按照如下操作处理

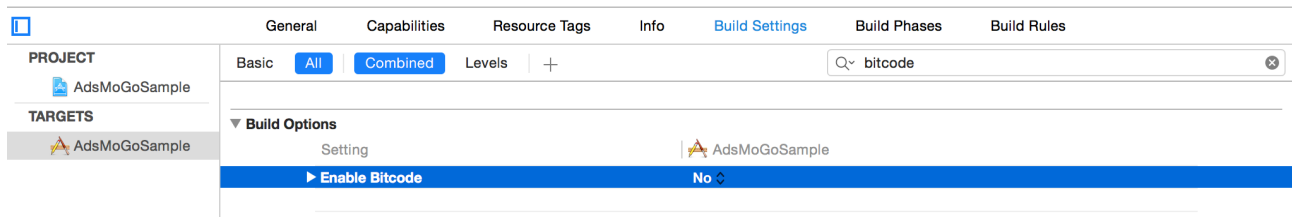

Build Settings->Enable Bitcode->No