
EX.NO:4 DATE:4/9/2024

Reg.no:220701017

MINIMAX ALGORITHM

- A simple example can be used to explain how the minimax algorithm works. We've included an example of a game-tree below, which represents a two-player game.
- There are two players in this scenario, one named Maximizer and the other named Minimizer.
- Maximizer will strive for the highest possible score, while Minimizer will strive for the lowest possible score.
- Because this algorithm uses DFS, we must go all the way through the leaves to reach the terminal nodes in this game-tree.
- The terminal values are given at the terminal node, so we'll compare them and retrace the tree till we reach the original state.

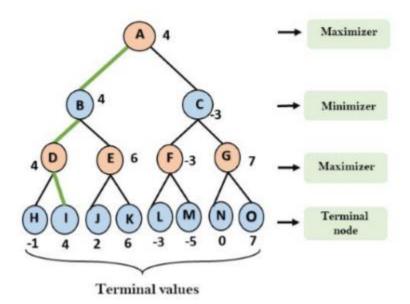

```
CODE:
def minimax(depth, nodeIndex, isMaximizingPlayer, scores, targetDepth):
    if depth == targetDepth:
        return scores[nodeIndex]
    if isMaximizingPlayer:
        return max(minimax(depth + 1, nodeIndex * 2, False, scores,
targetDepth),
                   minimax(depth + 1, nodeIndex * 2 + 1, False, scores,
targetDepth))
    else:
        return min(minimax(depth + 1, nodeIndex * 2, True, scores,
targetDepth),
                   minimax(depth + 1, nodeIndex * 2 + 1, True, scores,
targetDepth))
if name == " main ":
    scores = [3, 5, 2, 9, 12, 5, 23, 23]
    targetDepth = 3
    optimalValue = minimax(0, 0, True, scores, targetDepth)
    print("The optimal value for the game is:", optimalValue)
```

OUTPUT:

```
△ 220701017.jpynb ☆
File Edit View Insert Runtime Tools Help All changes saved
```

```
+ Code + Text

targetDepth = 3

optimalValue = minimax(0, 0, True, scores, targetDepth)
print("The optimal value for the game is:", optimalValue)

The optimal value for the game is: 12
```