Introduction to C Programming

Lecture 2

Abdur Rashid Tushar
tushar27156@gmail.com

Department of CSE
Bangladesh University of Engineering and Technology (BUET)

December 4, 2022

What we will learn

- If Statement

What we will learn

- If Statement
- If-else Statement

What we will learn

- If Statement
- If-else Statement
- Use of Logical operators

What we will learn

- If Statement
- If-else Statement
- Use of Logical operators
- Decisions using switch

If Statement

```
if ( this condition is true )
        execute this statement ;
```

Relational Operators

this expression	is true if
x == y	x is equal to y
x != y	x is not equal to y
x < y	x is less than y
x > y	x is greater than y
x <= y	x is less than or equal to y
x >= y	x is greater than or equal to y

The real Thing

```
if ( expression )
    statement ;
```

Note

In C a non-zero value is considered to be true, whereas a 0 is considered to be false.

Problems

- While purchasing certain items, a discount of 10% is offered if the quantity purchased is more than 1000. If quantity and price per item are input through the keyboard, write a program to calculate the total expenses.

Problems

- While purchasing certain items, a discount of 10% is offered if the quantity purchased is more than 1000. If quantity and price per item are input through the keyboard, write a program to calculate the total expenses.
- write a program to input two numbers from user. Find the minimum between given two numbers ans print it.

Problems

- While purchasing certain items, a discount of 10% is offered if the quantity purchased is more than 1000. If quantity and price per item are input through the keyboard, write a program to calculate the total expenses.
- write a program to input two numbers from user. Find the minimum between given two numbers ans print it.
- write a program to input three numbers from user. Find maximum between given three numbers.

Logical Operators

Logical Operators		
Operator	**Description**	**Example**
&&	AND	x=6 y=3 x<10 && y>1 Return True
||	OR	x=6 y=3 x==5 || y==5 Return False
!	NOT	x=6 y=3 !(x==y) Return True

switch-case

Syntax of switch...case

```
switch (expression)
{
    case constant1:
      // statements
      break;


    case constant2:
      // statements
      break;
    .
    .
    .
    default:
      // default statements
}
```

Problems

- The average marks obtained by a student are input through the keyboard. The student gets a gpa as per the following rules:
  - 80-100 $->$ 4.00
  - 75-79 $->$ 3.75
  - 70-74 $->$ 3.50
  - 0-69 $->$ 0.00

  print the gpa.

End

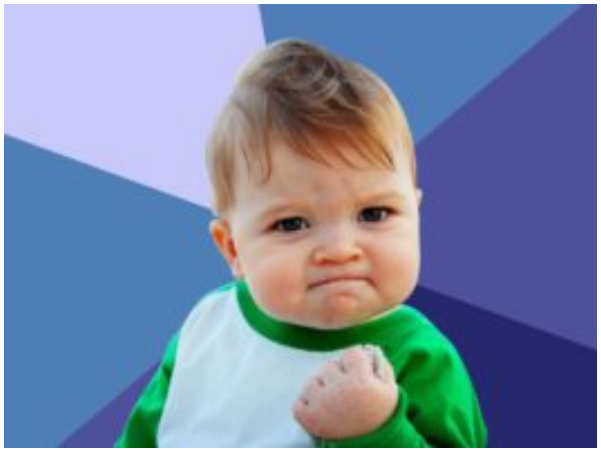

Thank You :)