

Documentation

Manager for Omron FH Vision System Simulators

1 About


This tool is a resource-saving, lightweight open-source tool for Windows. It simplifies the management of Omron FH Simulators. It reduces copy errors, makes swapping active simulators significantly faster, and, depending on the settings, optionally reduces duplicate copies of USB Disks. It provides a nicely structured overview of the available Simulators and USB Disks. In addition, active USB Disks or Simulators can be swapped out very easily. Local Simulators and USB Disks can also be easily backed up to a network drive. This also makes it very easy to see exactly when the active Simulator or USB Disk was last backed up.

 **Note on the Windows SmartScreen Warning** When you launch the setup, Windows might display a blue warning screen ("Windows protected your PC"). This happens because this is a free open-source project and I haven't purchased an expensive developer certificate to digitally sign the .exe file. Here is how you can install the app anyway: Click on **More info** in the blue window, and then click the **Run anyway** button. Since the entire source code is transparently available here on GitHub, you can rest assured.


2 App Surface

2.1 Main Window


Settings: 0. Simulator and USBDisk is same.

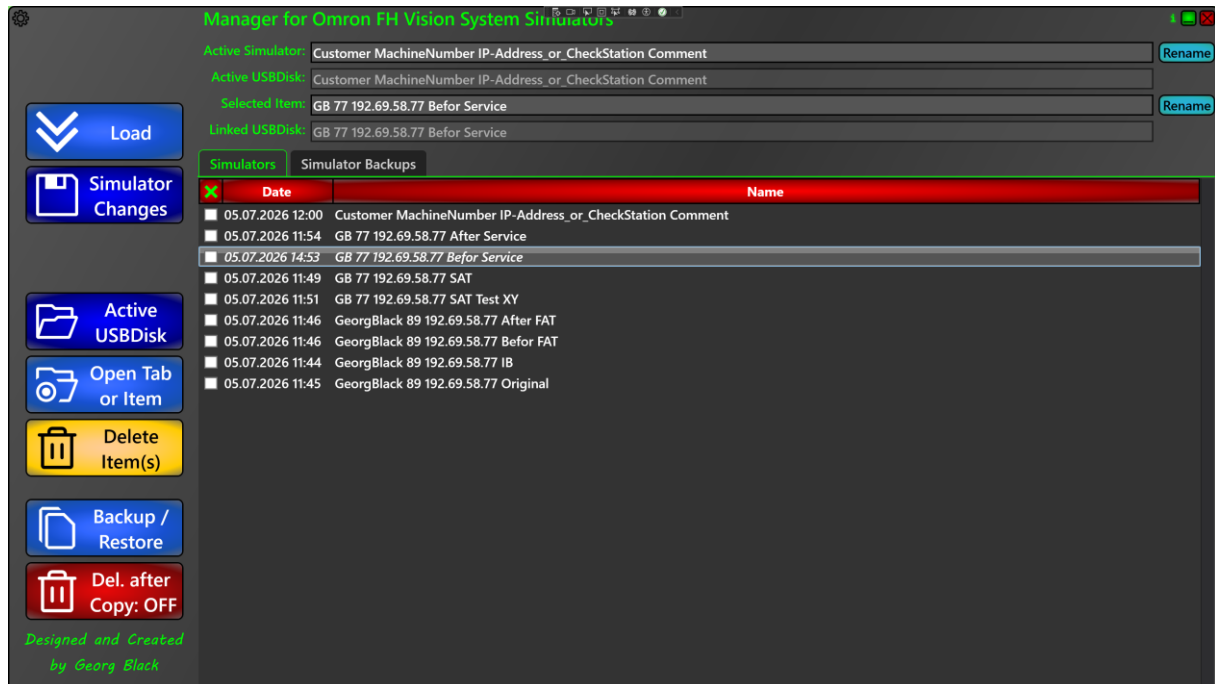

Settings: 1. One USBDisk can use for more once Simulator and you can load Items separately.

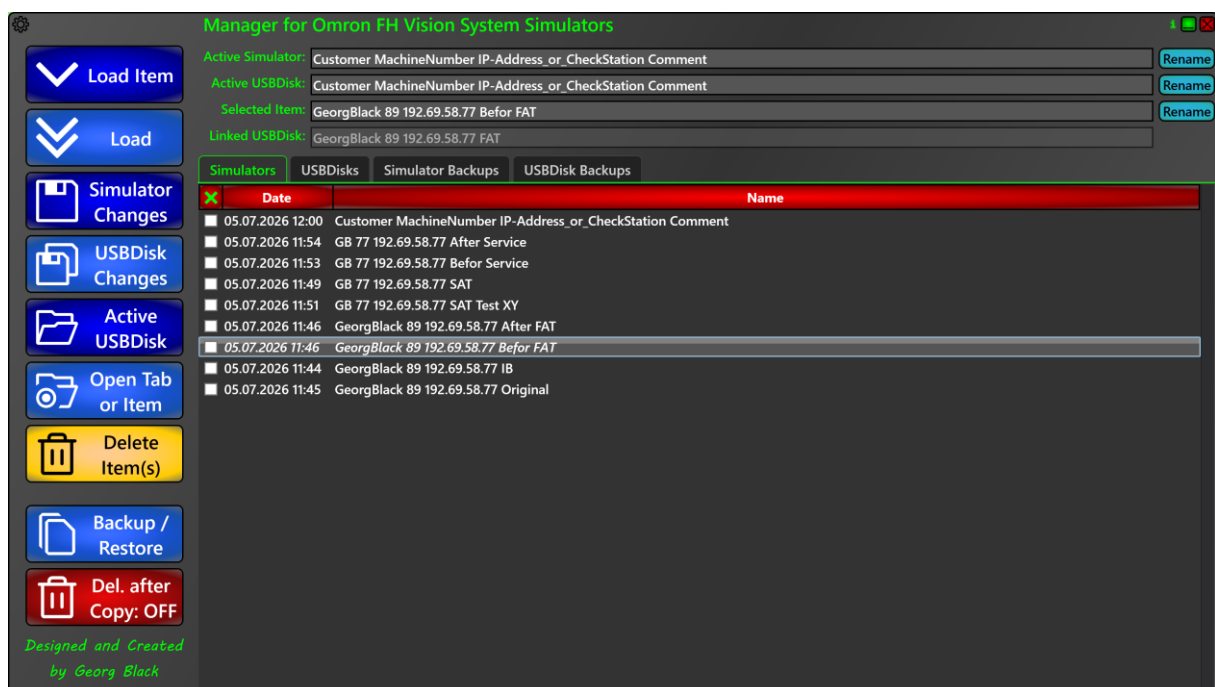

2.2 Settings

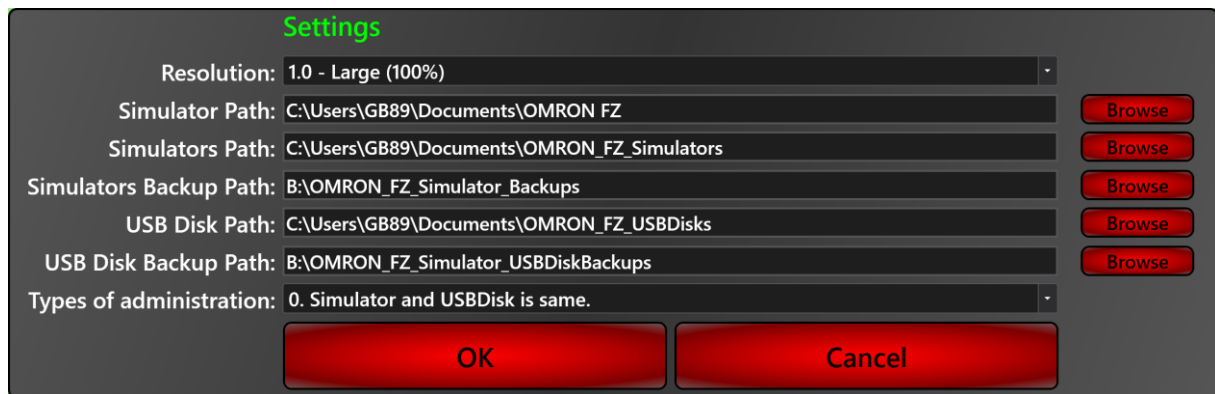


The Settings dialog box has a title bar with the text "Settings" in green. It contains several configuration fields with corresponding "Browse" buttons on the right:

- Resolution: 1.0 - Large (100%) (dropdown menu)
- Simulator Path: C:\Users\GB89\Documents\OMRON FZ (text field)
- Simulators Path: C:\Users\GB89\Documents\OMRON_FZ_Simulators (text field)
- Simulators Backup Path: B:\OMRON_FZ_Simulator_Backups (text field)
- USB Disk Path: C:\Users\GB89\Documents\OMRON_FZ_USBDisks (text field)
- USB Disk Backup Path: B:\OMRON_FZ_Simulator_USBDiskBackups (text field)
- Types of administration: 0. Simulator and USBDisk is same. (dropdown menu)


At the bottom are two large red buttons: "OK" and "Cancel".

2.3 Info

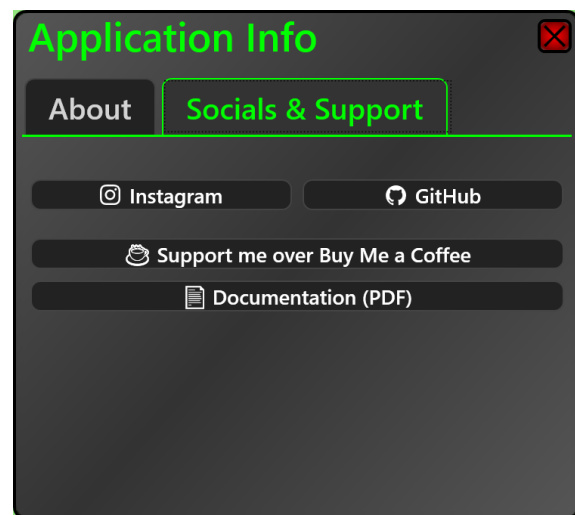


3 Flow Charts


3.1 Load Item

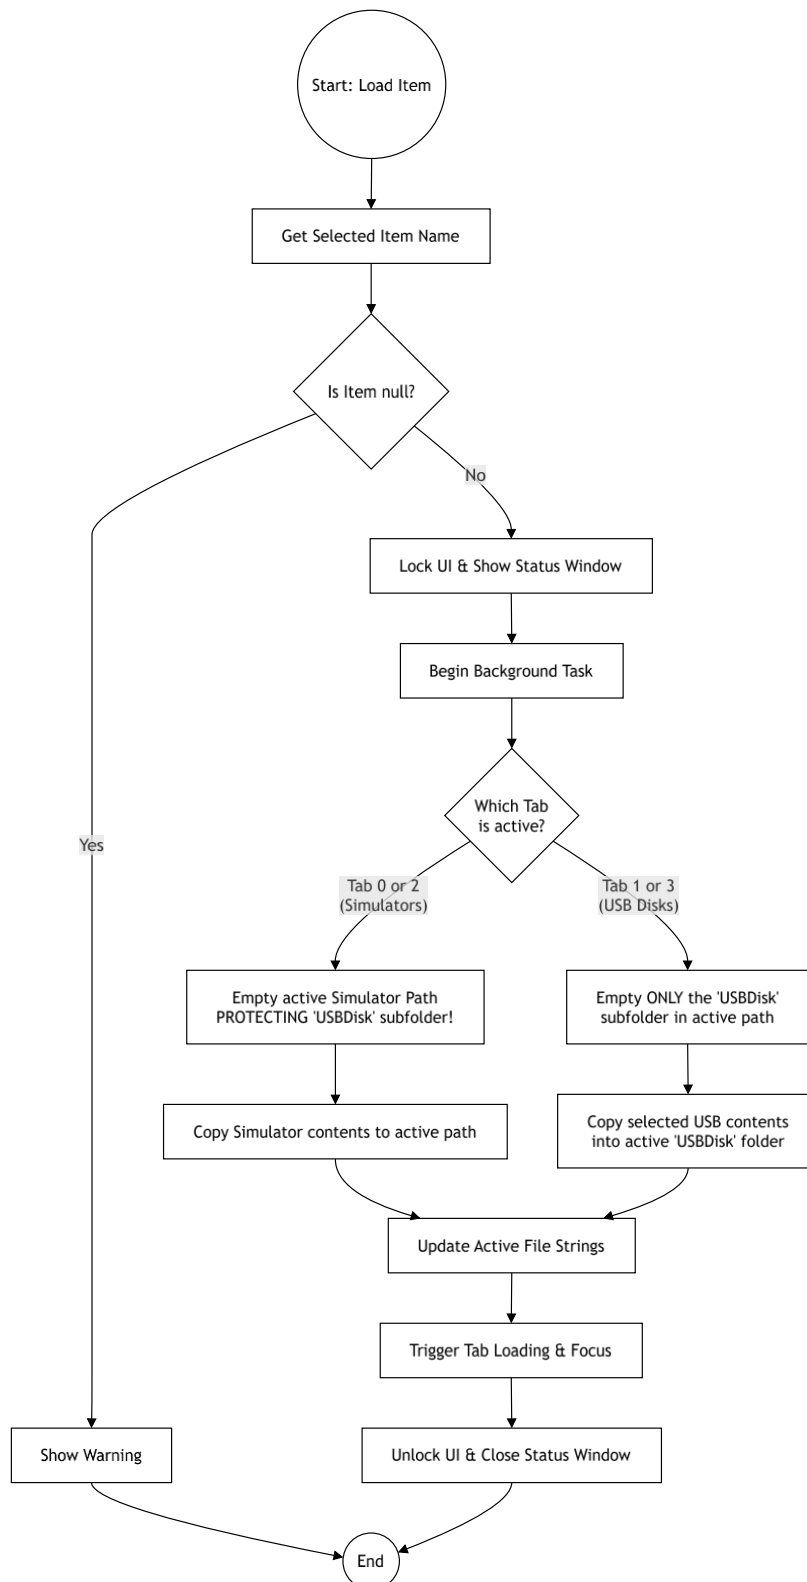


3.2 Load

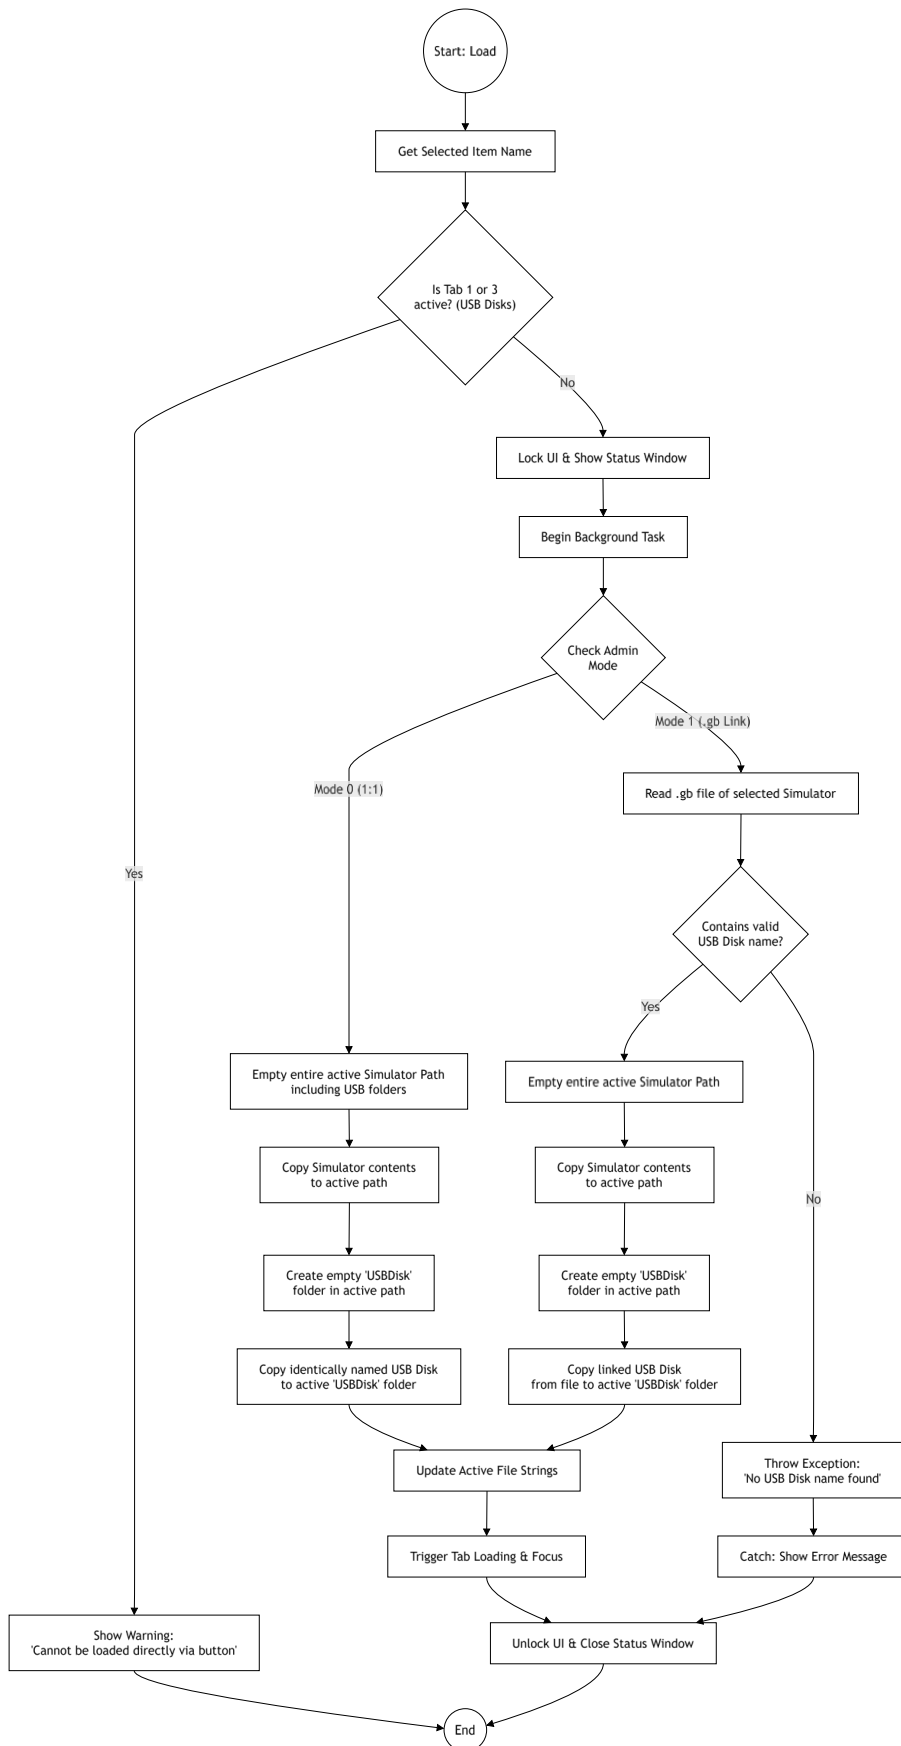


3.3 Save Simulator vs. USBDisk Changes

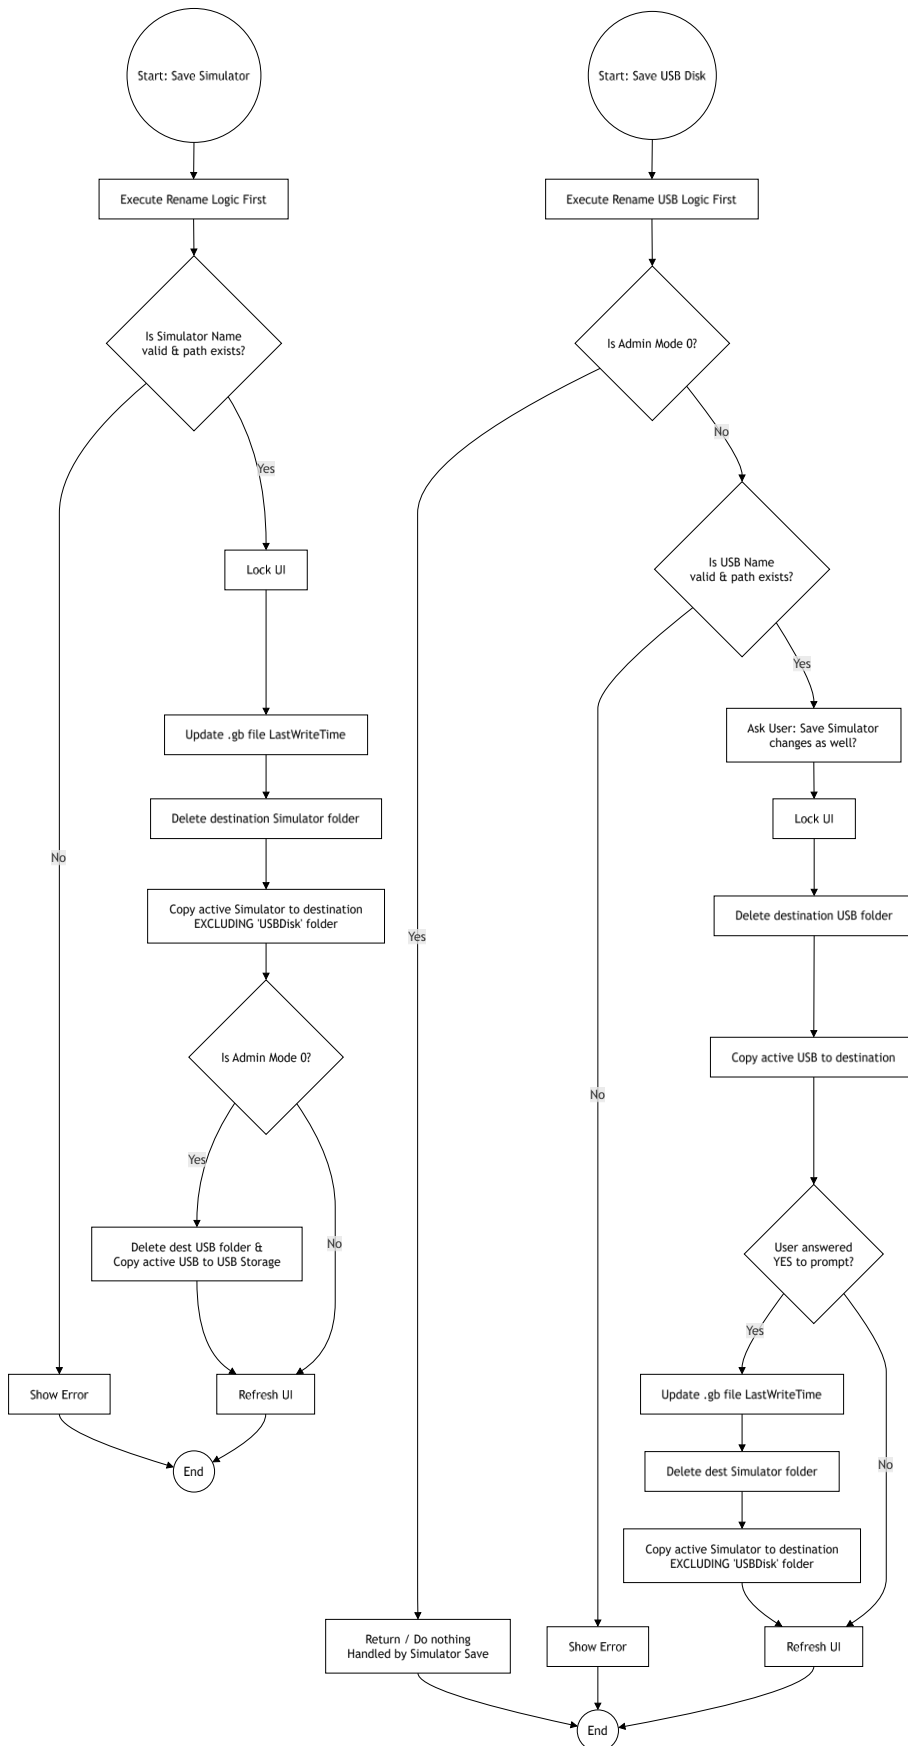



3.4 Delete Item(s)

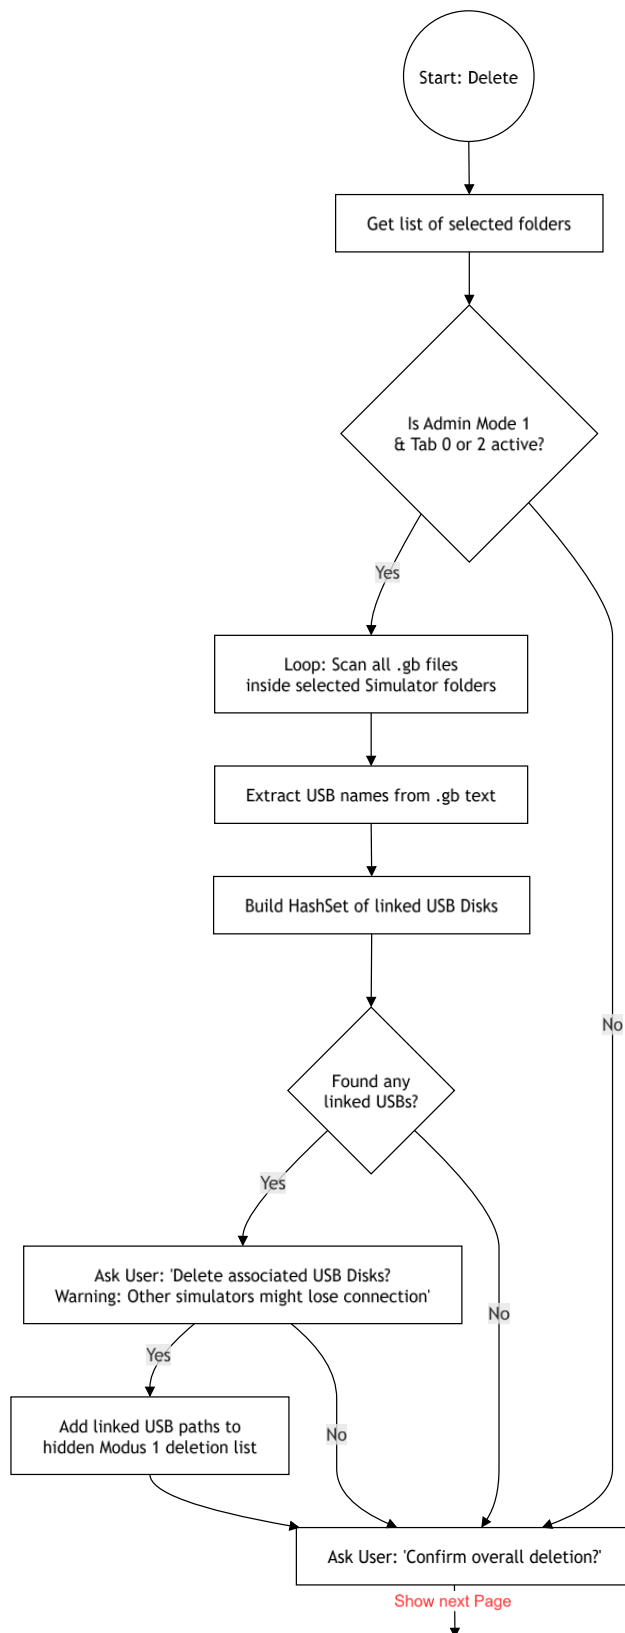

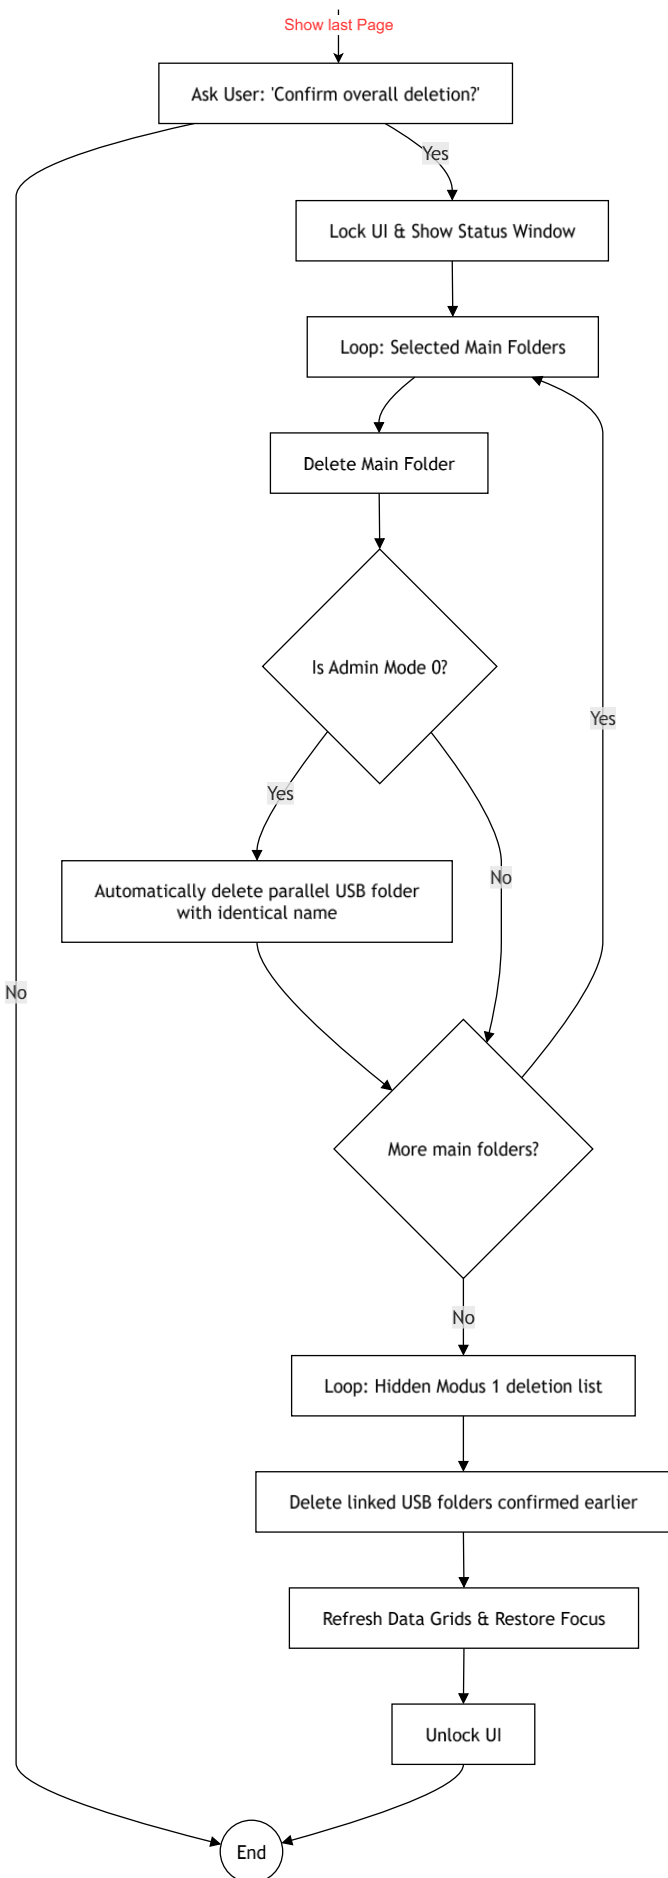

3.5 Copy Backup / Restore

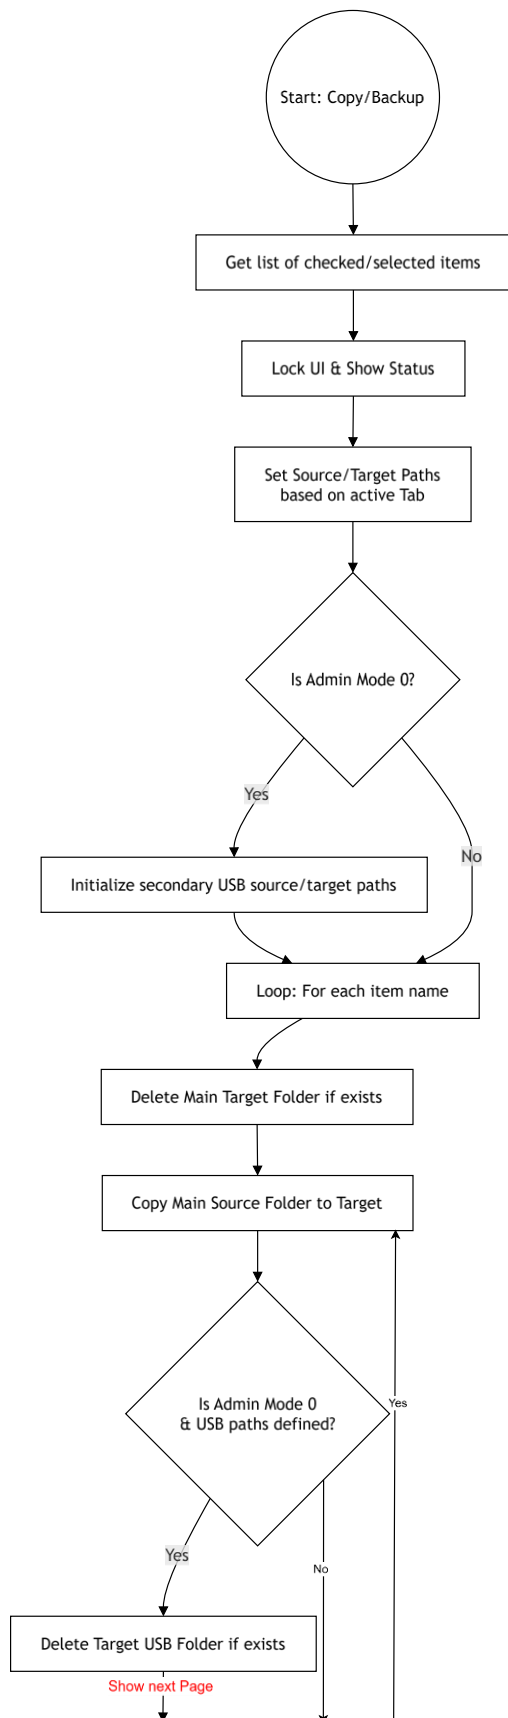


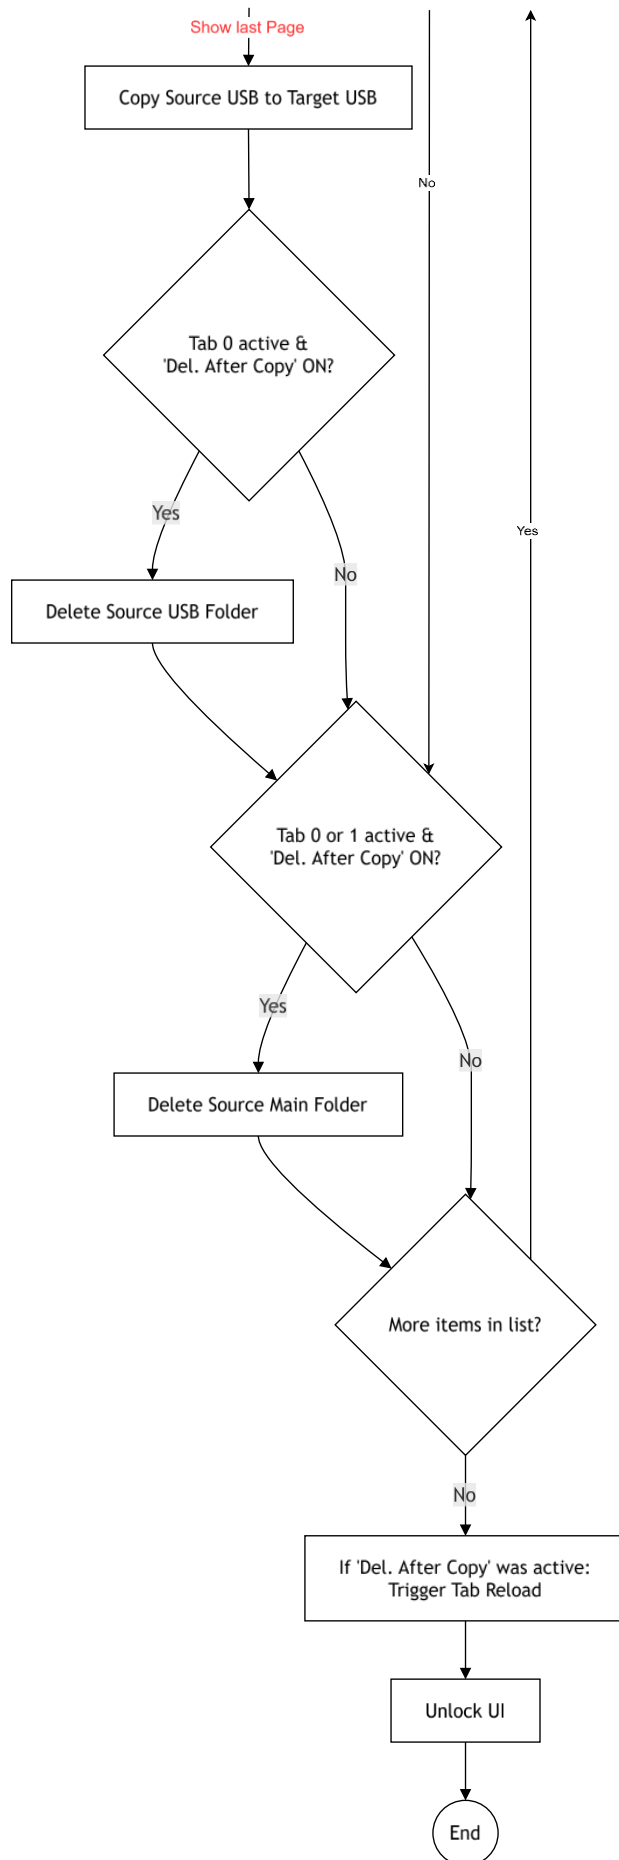

4 First Use

4.1 Simulator Folder


For the first use, you need a standard Simulator; this is currently the standard Omron Simulator folder:

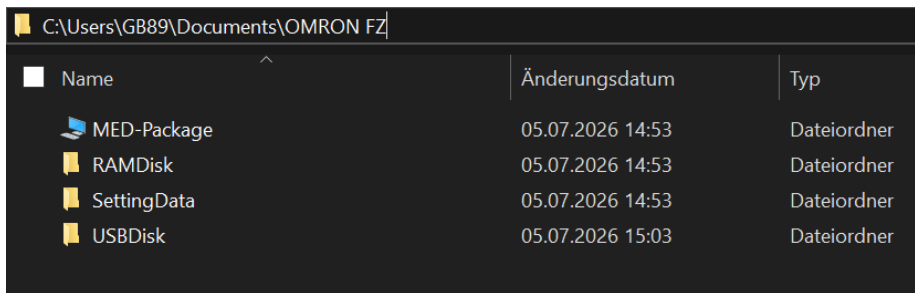

Name	Änderungsdatum	Typ
MED-Package	05.07.2026 14:53	Dateiordner
RAMDisk	05.07.2026 14:53	Dateiordner
SettingData	05.07.2026 14:53	Dateiordner
USBDisk	05.07.2026 15:03	Dateiordner

4.2 Set the paths first

For example, these are my standard paths:

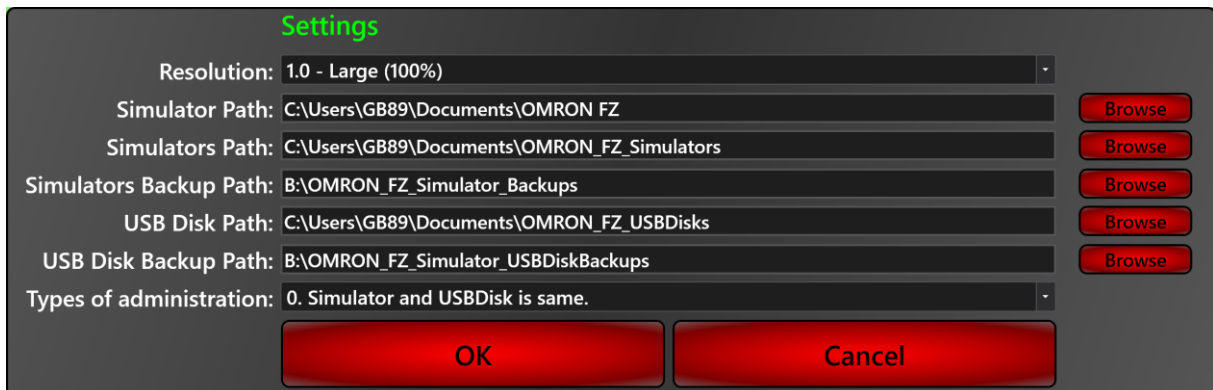

Settings

Resolution: 1.0 - Large (100%)

Simulator Path: C:\Users\GB89\Documents\OMRON FZ Browse

Simulators Path: C:\Users\GB89\Documents\OMRON_FZ_Simulators Browse

Simulators Backup Path: B:\OMRON_FZ_Simulator_Backups Browse

USB Disk Path: C:\Users\GB89\Documents\OMRON_FZ_USBDisks Browse

USB Disk Backup Path: B:\OMRON_FZ_Simulator_USBDiskBackups Browse

Types of administration: 0. Simulator and USBDisk is same.

OK Cancel

4.3 Set “Types of administration”

You have two options, but they are not 100% compatible with each other!

0. Simulator and USBDisk is same.

With this setting, the USB Disk is always kept together with the Simulator. When the Simulator is loaded, the identically named USB Disk is also searched for and loaded.

1. One USBDisk can use for more once Simulator and you can load Items separately.

To save storage space and loading times, the Simulator and USB Disk can be loaded separately using the "Load Item" button. If a Simulator should be loaded together with its linked USB Disk, you can simply use the "Load" button. Likewise, the Simulator and USB Disk can be backed up individually.

4.4 No name for active items

Assign a name to each and press save; this will create the first item in the list.


5 FAQ & Troubleshooting

5.1 Create a new Simulator or USBDisk

To create a new Simulator or USB Disk, simply rename the currently loaded Simulator or USB Disk and then click a save button to store it. Files will only be overwritten if they already existed.


5.2 How does the app know the name of the Simulator or USB Disk?

A *.gb file is always created in the Simulator folder, and the name of the linked USB Disk is written inside it.

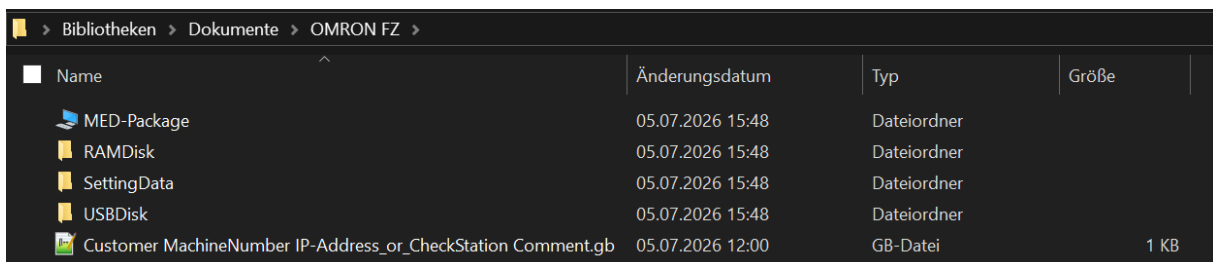

Name	Änderungsdatum	Typ	Größe
MED-Package	05.07.2026 15:48	Dateiordner	
RAMDisk	05.07.2026 15:48	Dateiordner	
SettingData	05.07.2026 15:48	Dateiordner	
USBDisk	05.07.2026 15:48	Dateiordner	
Customer MachineNumber IP-Address_or_CheckStation Comment.gb	05.07.2026 12:00	GB-Datei	1 KB

Here, the USB Disk has the same name as the Simulator:

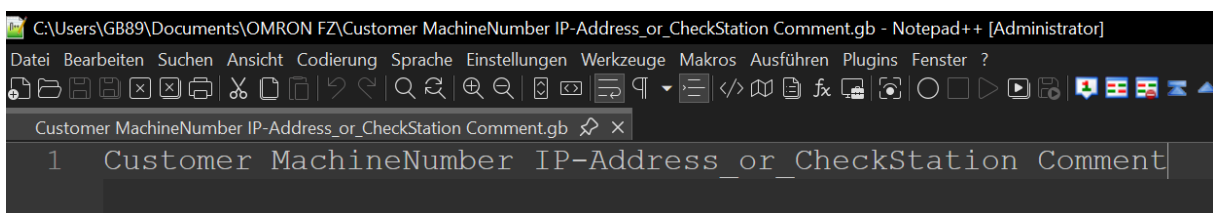

A *.gb file is also created in the USB Disk folder, but it remains empty:

Bibliotheken > Dokumente > OMRON FZ > USBDisk		
Name	Änderungsdatum	
 Customer MachineNumber IP-Address_or_CheckStation Comment.gb	04.07.2026 12:53	

⚠ Do not delete these files and, if possible, do not modify them!

6 License

This app is an open-source project released under the GNU General Public License v3.0 (GPLv3). This means you are free to use, modify, and redistribute the software, provided that all modifications remain open source under the same license. For more details on the licensing terms, please refer to the LICENSE file in this repository.

7 Bug Reporting & Feature Requests

Found a bug or have a great idea for a new feature? The best way to let me know is by opening a new Issue right here in the "Issues" tab on GitHub. Alternatively, feel free to reach out directly!