577. Employee Bonus

Description

Table: Employee

+	++
Column Name	Type
+	++
empId	int
name	varchar
lsunervisor	l int l


| int

empId is the column with unique values for this table.

Each row of this table indicates the name and the ID of an employee in addition to their salary and the id of their manager.

Table: Bonus

| salary

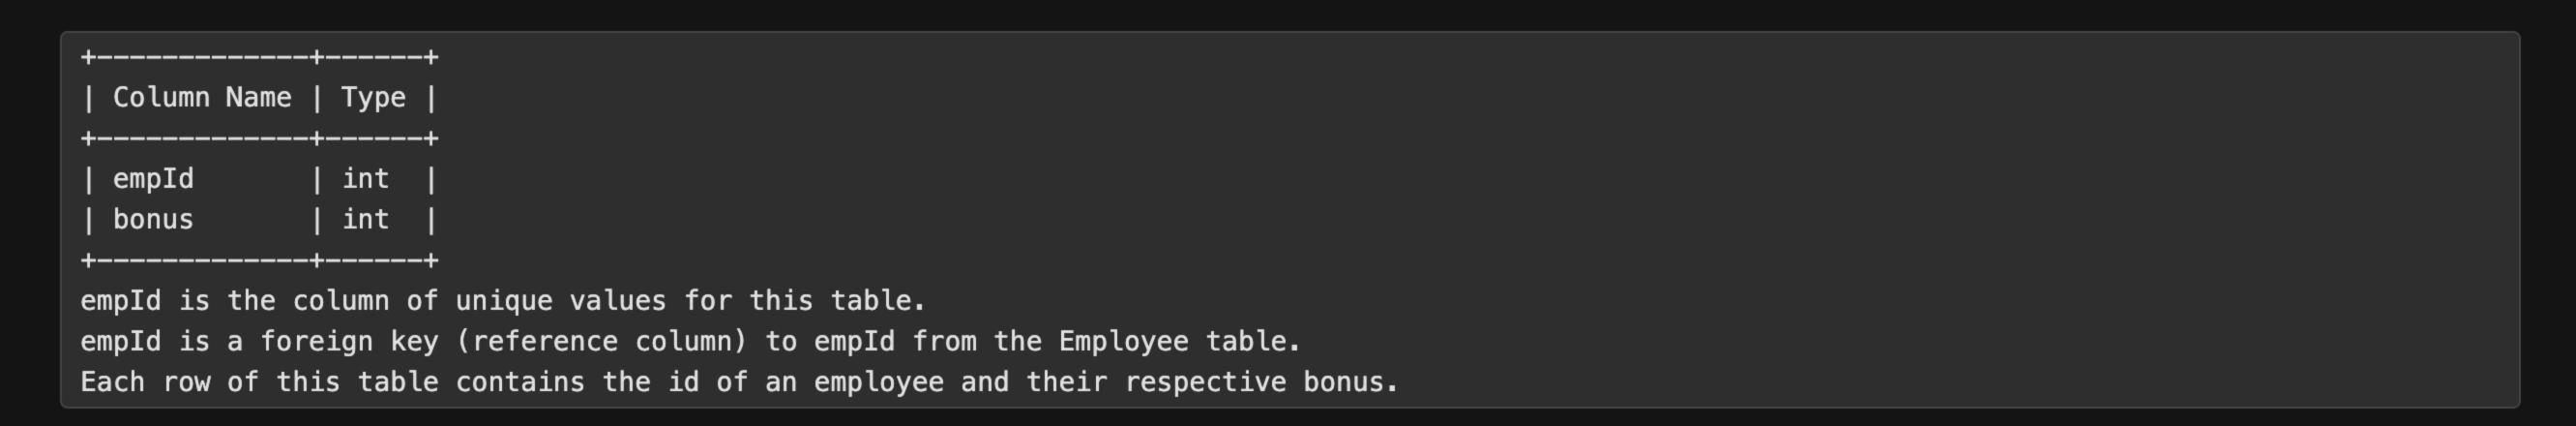

Write a solution to report the name and bonus amount of each employee with a bonus less than 1000.

Return the result table in any order.

The result format is in the following example.

Example 1:

	nput: ployee	table: _		
			+	
	empId		supervisor	
	- 3		 null	 4000
1	1	John	3	1000
-	2		3	2000
•	4	Thomas		4000
Bonus table:				
+-	+	+		
1	empId	bonus		
		+ 		
+	4 4	500 2000		
		+		
0ι	ıtput:			
		+		
-1	name	bonus		
		+		
		null		
		null 500		
	·	+		
	· · ·	·		