



1. Un menú (principal: Submenú, Ayuda, Créditos) para seleccionar a las compañías telefónicas.
2. Al seleccionar a la compañía del menú el programa pedirá:
  - 2.1. La cantidad a ser abonada en dinero. Controlar la forma de verificar el pago correspondiente.
  - 2.2. Solicitará el número celular para abonarle el saldo indicado. Debe llegarle un mensaje al cliente que ya fue aprobado su saldo. Debe guardarse esa transacción en una base de datos para que pueda ser verificada en un momento determinado.




- 2.3. Solicitar a que se confirme el número celular. Puede usar una numeración para la confirmación u otro detalle.
- 2.4. Si los números son validados aparecerá en la pantalla usted abono \$ X (Balboas) al número celular de lo contrario intente nuevamente ingresando el numero celular (Cada vez que se recarga, se debe remitir la transacción en un archivo JSON. Para efecto de prueba puede ser un correo electrónico: de manera provisional usaremos el personal suyo, después se cambia a otra cuenta).


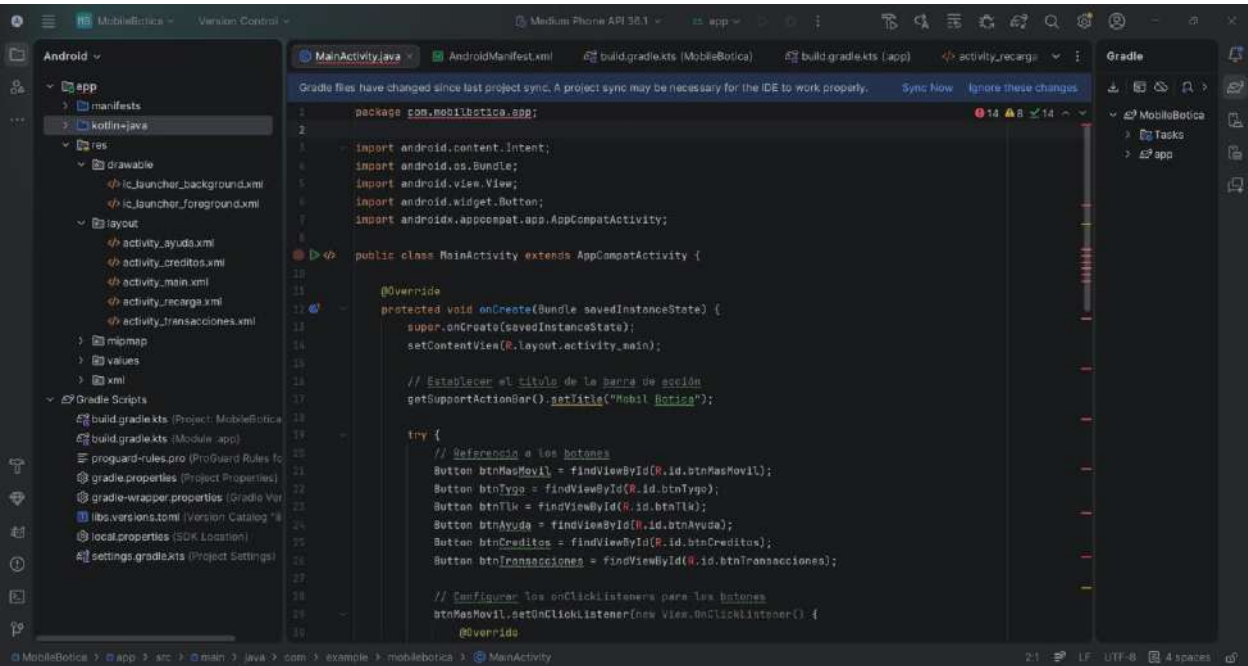



```
1 package com.mobilebotica.app;
2
3 import android.content.Intent;
4 import android.os.Bundle;
5 import android.view.View;
6 import android.widget.Button;
7 import androidx.appcompat.app.AppCompatActivity;
8
9 public class MainActivity extends AppCompatActivity {
10
11     @Override
12     protected void onCreate(Bundle savedInstanceState) {
13         super.onCreate(savedInstanceState);
14         setContentView(R.layout.activity_main);
15
16         // Establecer el título de la barra de acción
17         getSupportActionBar().setTitle("Mobil Botica");
18
19         try {
20             // Referencia a los botones
21             Button btnMasMovil = findViewById(R.id.btnMasMovil);
22             Button btnTygo = findViewById(R.id.btnTygo);
23             Button btnTlk = findViewById(R.id.btnTlk);
24             Button btnAyuda = findViewById(R.id.btnAyuda);
25             Button btnCreditos = findViewById(R.id.btnCreditos);
26             Button btnTransacciones = findViewById(R.id.btnTransacciones);
27
28             // Configurar los onClickListeners para los botones
29             btnMasMovil.setOnClickListener(new View.OnClickListener() {
30                 @Override
```

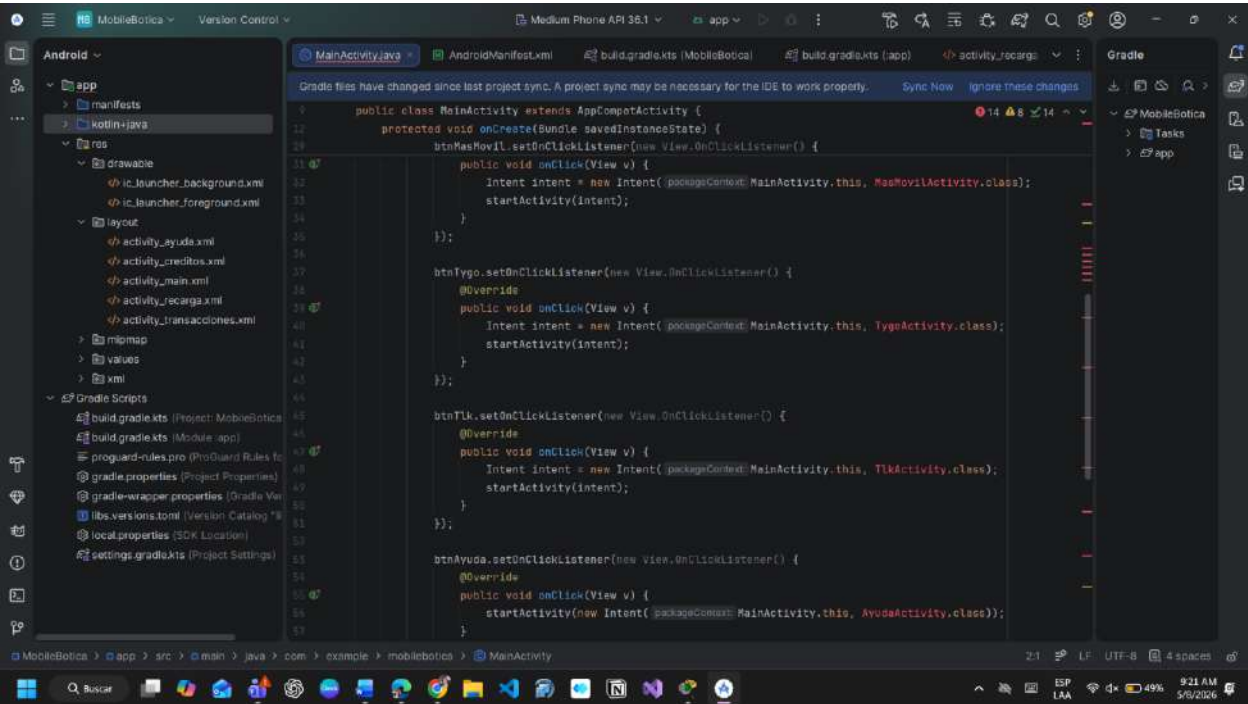

```
31         public void onClick(View v) {
32             Intent intent = new Intent(packageContext, MainActivity.class);
33             startActivity(intent);
34         }
35
36         btnTygo.setOnClickListener(new View.OnClickListener() {
37             @Override
38             public void onClick(View v) {
39                 Intent intent = new Intent(packageContext, MainActivity.class);
40                 startActivity(intent);
41             }
42         });
43
44         btnTlk.setOnClickListener(new View.OnClickListener() {
45             @Override
46             public void onClick(View v) {
47                 Intent intent = new Intent(packageContext, MainActivity.class);
48                 startActivity(intent);
49             }
50         });
51
52         btnAyuda.setOnClickListener(new View.OnClickListener() {
53             @Override
54             public void onClick(View v) {
55                 startActivity(new Intent(packageContext, MainActivity.class));
56             }
57         });
58     }
59 }
```

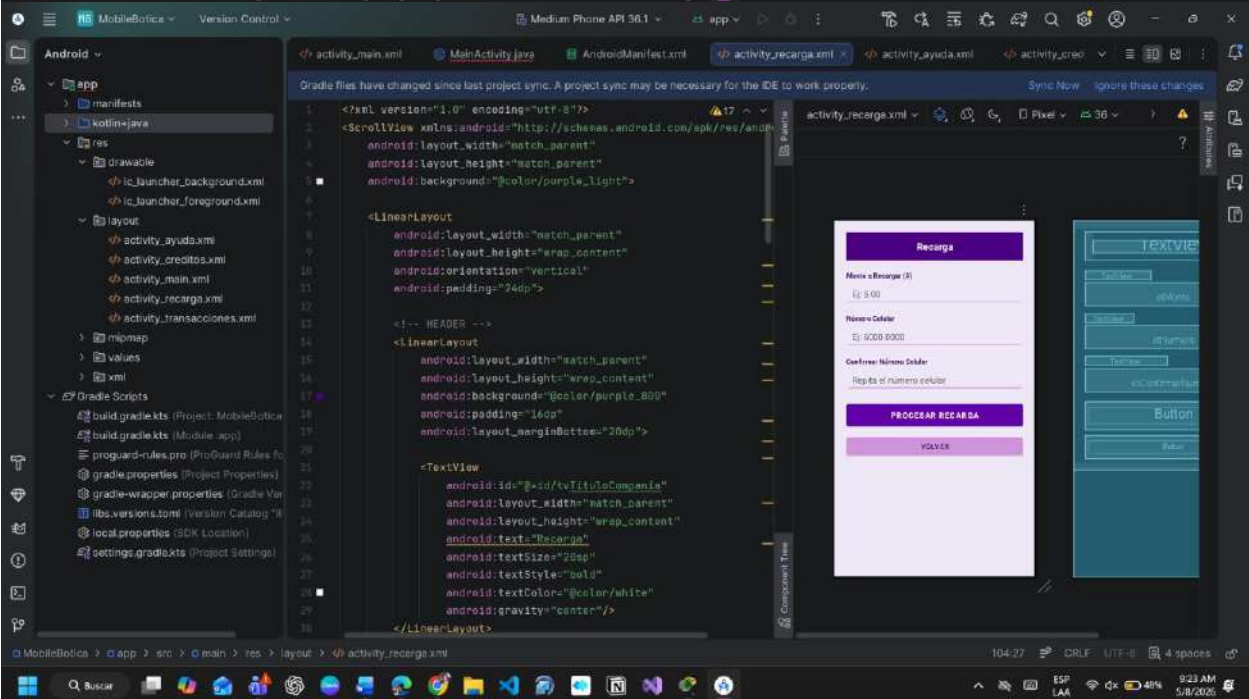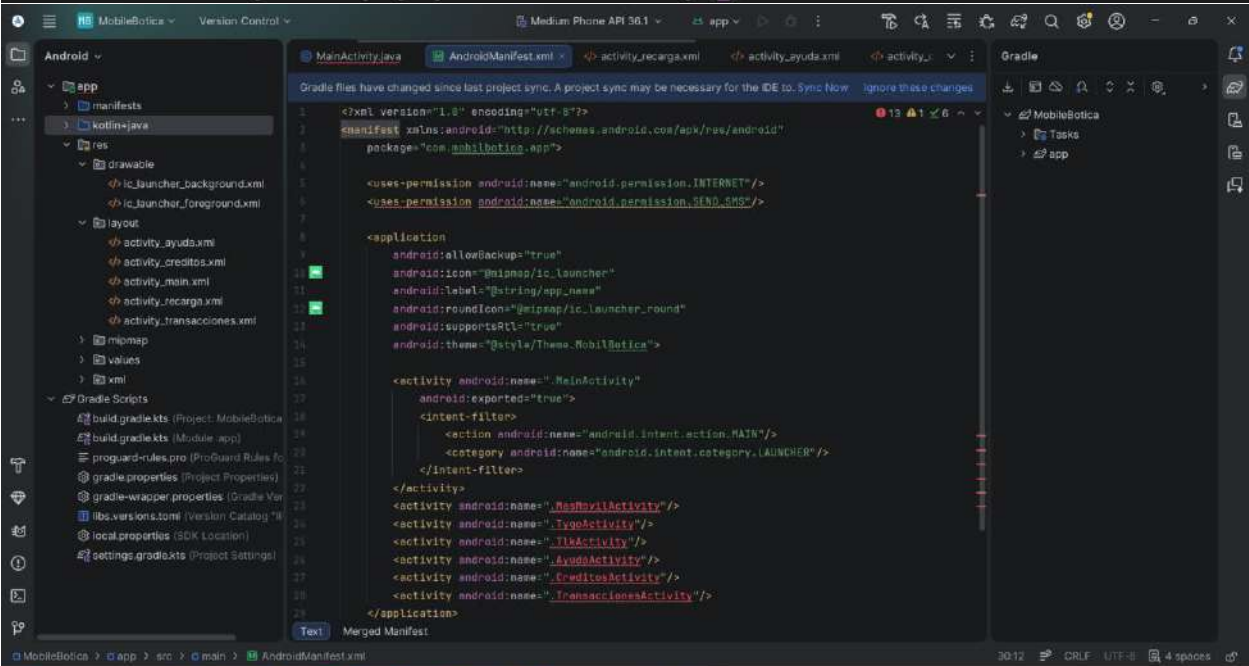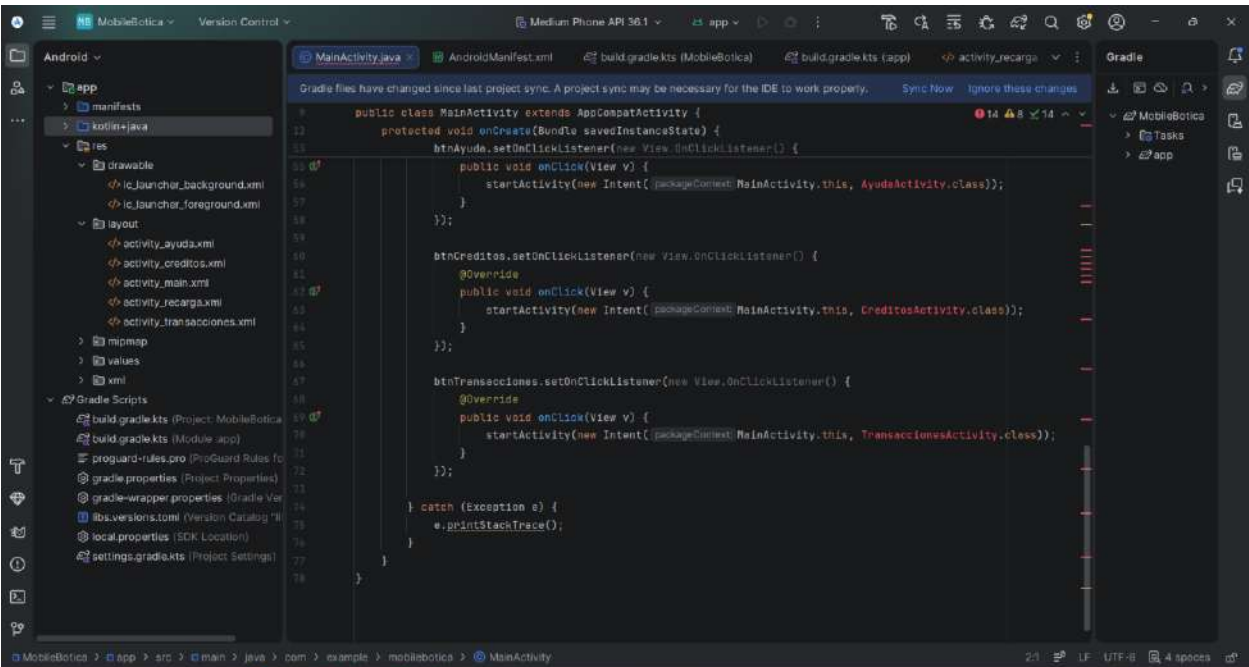

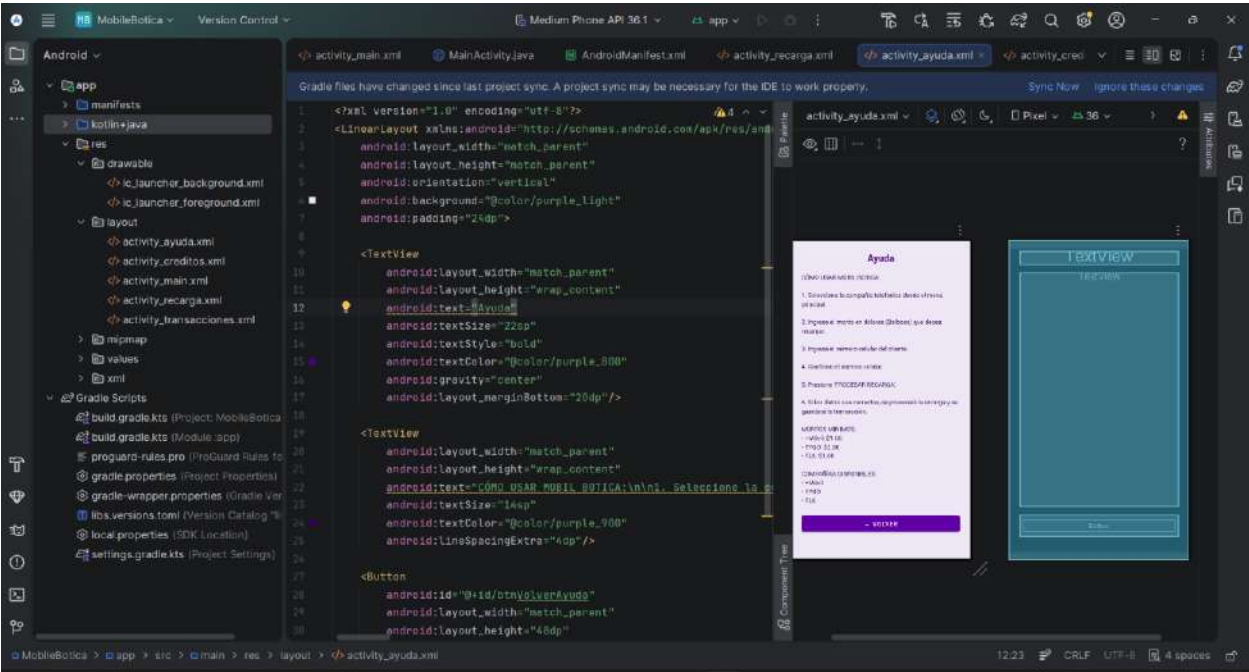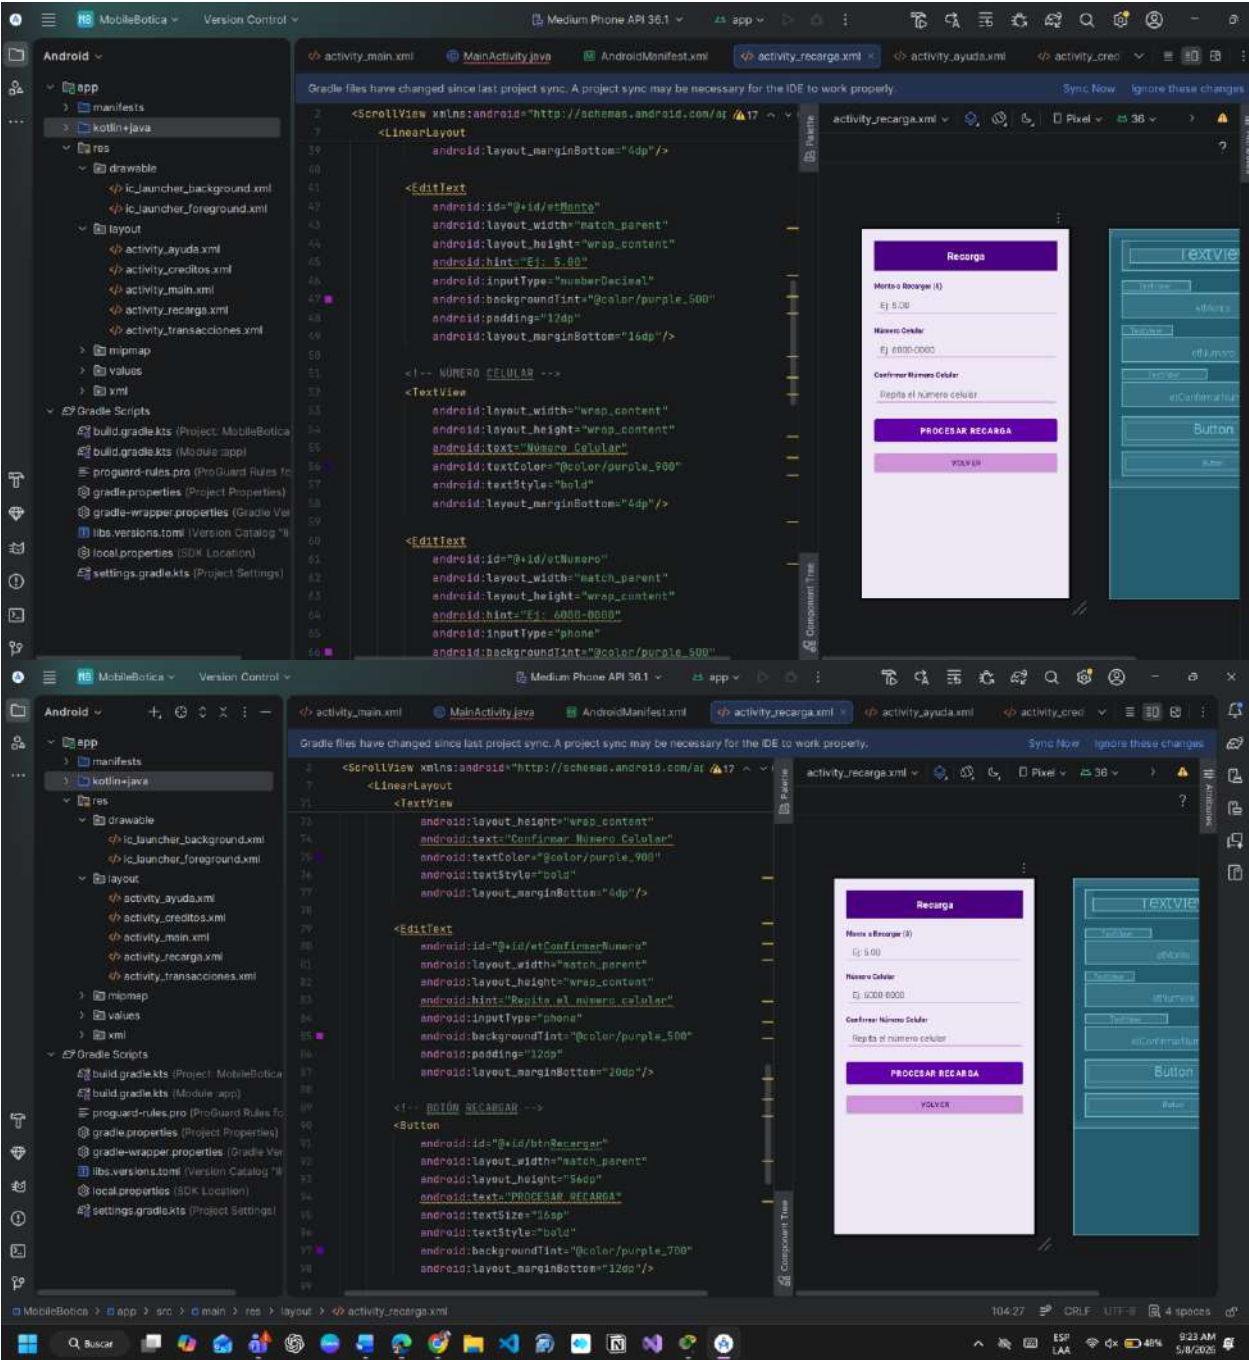

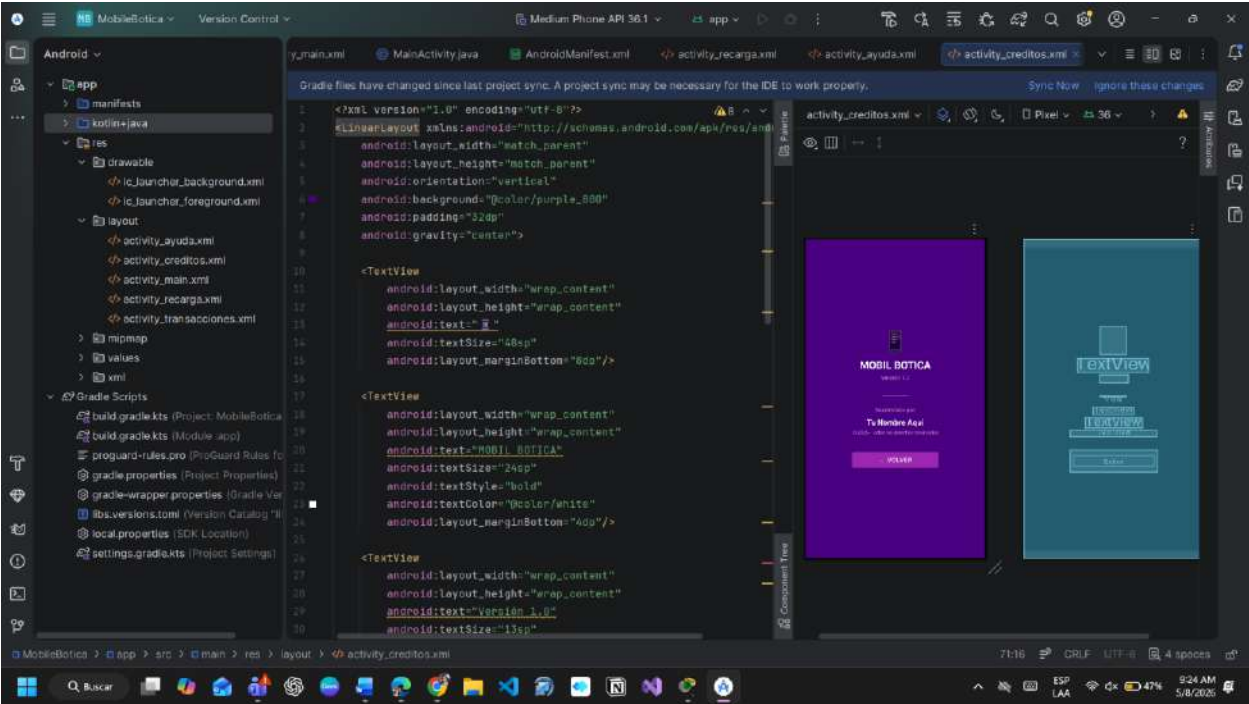

**II PARTE. Simulación de Red LAN. Valor 20 puntos**

Procedimiento:

- 1. Confeccione, configure la Red LAN (Figura 1) de conectividad de la MOBIL BOTICA sucursal 1 (Avenida 2 Este) y sucursal 2 (Plaza San Mateo Calle F Sur). Ver el Cuadro de requerimientos:

| Nombre del dispositivo | IP Address (Dirección IP)                     | Máscara de subred                  |
|------------------------|-----------------------------------------------|------------------------------------|
| R1                     | G0/0/0 - 192.168.1.1<br>G0/0/1 - 192.168.1.33 | 255.255.255.224<br>255.255.255.224 |
| SW1                    | VLAN1 - 192.168.1.20                          | 255.255.255.224                    |
| SW2                    | VLAN1 - 192.168.1.62                          | 255.255.255.224                    |
| L1                     | F0 - 192.168.1.10                             | 255.255.255.224                    |
| L2                     | F0 - 192.168.1 40                             | 255.255.255.224                    |


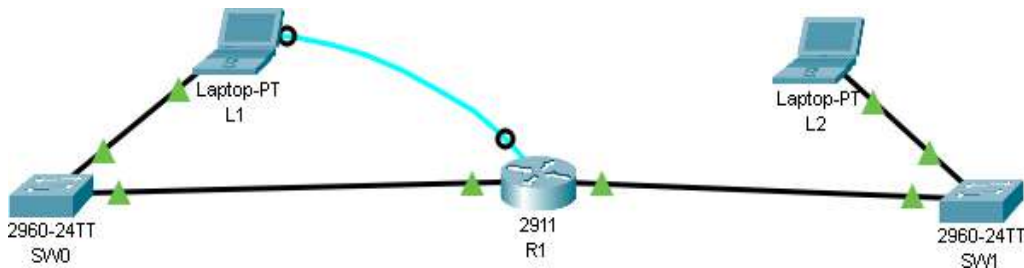


Figura 1. Diagrama de Red MOBIL BOTICA

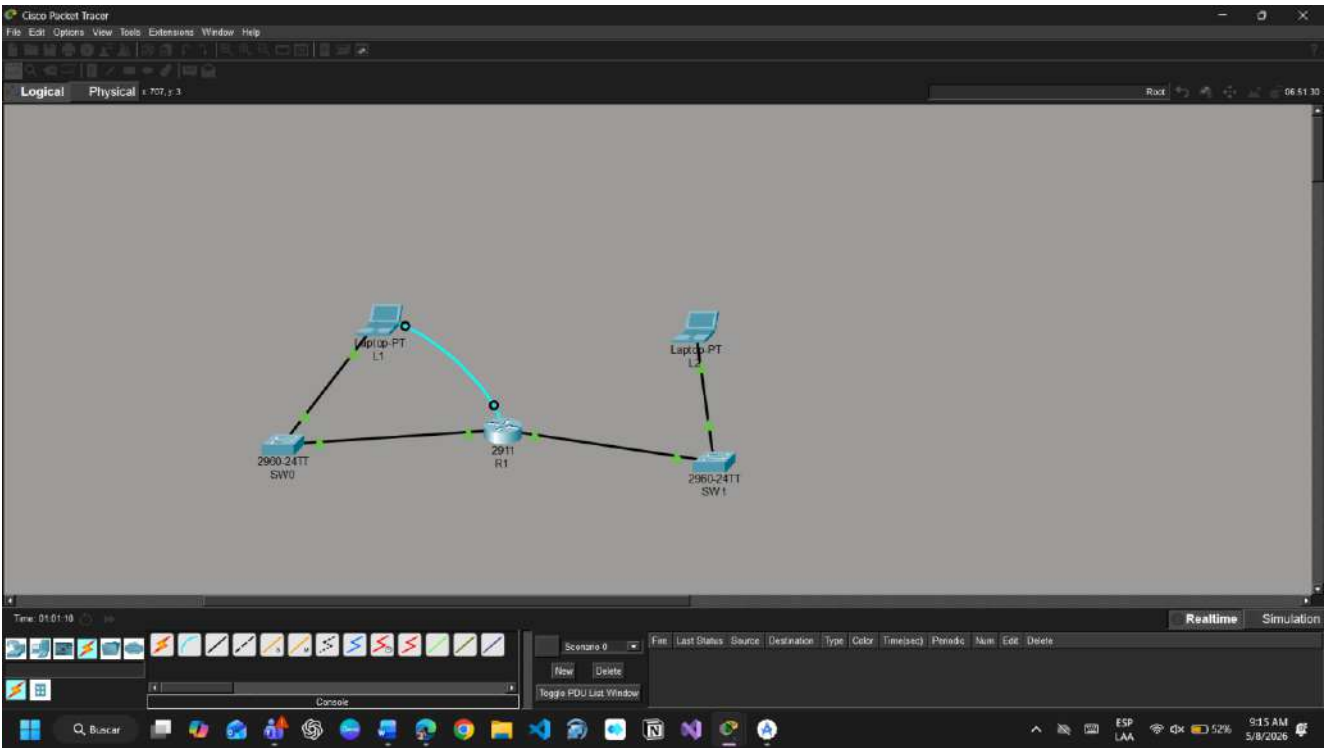

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface gigabitEthernet 0/0/0
%Invalid interface type and number
Router(config)#show ip interface brief
^
% Invalid input detected at '^' marker.

Router(config)#interface fastEthernet 0/0
%Invalid interface type and number
Router(config)#interface gigabitEthernet 0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.224
Router(config-if)#no shutdown

Router(config-if)#
%LINK-3-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
exit
Router(config)#interface gigabitEthernet 0/1
Router(config-if)#ip address 192.168.1.33 255.255.255.224
Router(config-if)#no shutdown

Router(config-if)#
%LINK-3-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
exit
Router(config)#
```

```
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface vlan 1
Switch(config-if)#192.168.1.20 255.255.255.224
^
% Invalid input detected at '^' marker.

Switch(config-if)#ip address 192.168.1.20 255.255.255.224
Switch(config-if)#no shutdown

Switch(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
exit
Switch(config)#
```

```
Cisco IOS Software, C2960 Software (C2960-LANBASEK9-M), Version 15.0(2)SE4, RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2013 by Cisco Systems, Inc.
Compiled Wed 26-Jun-13 02:49 by mnnguyen

Press RETURN to get started!

%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface vlan 1
Switch(config-if)#ip address 192.168.1.62 255.255.255.224
Switch(config-if)#no shutdown

Switch(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
exit
Switch(config)#
```

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.1

Pinging 192.168.2.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.2.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 192.168.1.20

Pinging 192.168.1.20 with 32 bytes of data:

Request timed out.
Reply from 192.168.1.20: bytes=32 time<1ms TTL=255
Reply from 192.168.1.20: bytes=32 time<1ms TTL=255
Reply from 192.168.1.20: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.20:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

