

# **XC-9000**

## **HTTP API Description**

**Version 1.6**


**2018-6-1**

# Catalogue

|                                                                |    |
|----------------------------------------------------------------|----|
| 1. API Call description.....                                   | 3  |
| 2. Detailed description of API .....                           | 4  |
| 2.1 To obtain system version information.....                  | 4  |
| 2.2 To obtain zone information.....                            | 4  |
| 2.3 To obtain IP terminal information.....                     | 4  |
| 2.4 To filter terminal information .....                       | 5  |
| 2.5 To control terminal.....                                   | 6  |
| 2.6 To add terminal .....                                      | 6  |
| 2.7 To modify terminal .....                                   | 7  |
| 2.8 To delete terminal .....                                   | 7  |
| 2.9A To query schedule task (Directory) .....                  | 7  |
| 2.9B To query schedule task (Single task).....                 | 8  |
| 2.10 To add a schedule task .....                              | 10 |
| 2.11 To modify a schedule task.....                            | 11 |
| 2.12 To delete a schedule task.....                            | 11 |
| 2.13 To start a task manually .....                            | 11 |
| 2.14 To stop a task manually.....                              | 12 |
| 2.15 To add a zone .....                                       | 12 |
| 2.16 To modify a zone .....                                    | 12 |
| 2.17 To delete a zone .....                                    | 13 |
| 2.18 To get a list of media.....                               | 13 |
| 2.19 To get the actual path to media .....                     | 13 |
| 2.20 To add media files.....                                   | 14 |
| 2.21 To delete media files .....                               | 16 |
| 2.22 To notify server to update terminal information .....     | 16 |
| 2.23 To query recording information .....                      | 16 |
| 2.24 To set extended text information for terminals .....      | 17 |
| 2.25 To upload extended picture information for terminals..... | 17 |
| 2.26 To get extended information of terminals.....             | 17 |
| 2.27 To execute tasks quickly .....                            | 18 |
| 2.28 To adjust terminal volume .....                           | 19 |
| 2.29 To control terminal short-circuit output.....             | 19 |
| 3. To push message .....                                       | 20 |

## 1. API Call description

1.1 To adopt HTTP protocol for all interfaces and to call interfaces via basic POST way; Content-Type is "application/x-www-form-urlencoded" format and the parameters passed on are jsondata[xxx] format and the return data is JSON Format, as shown in the figure below (We recommend to use "PostMan" tool for debugging):

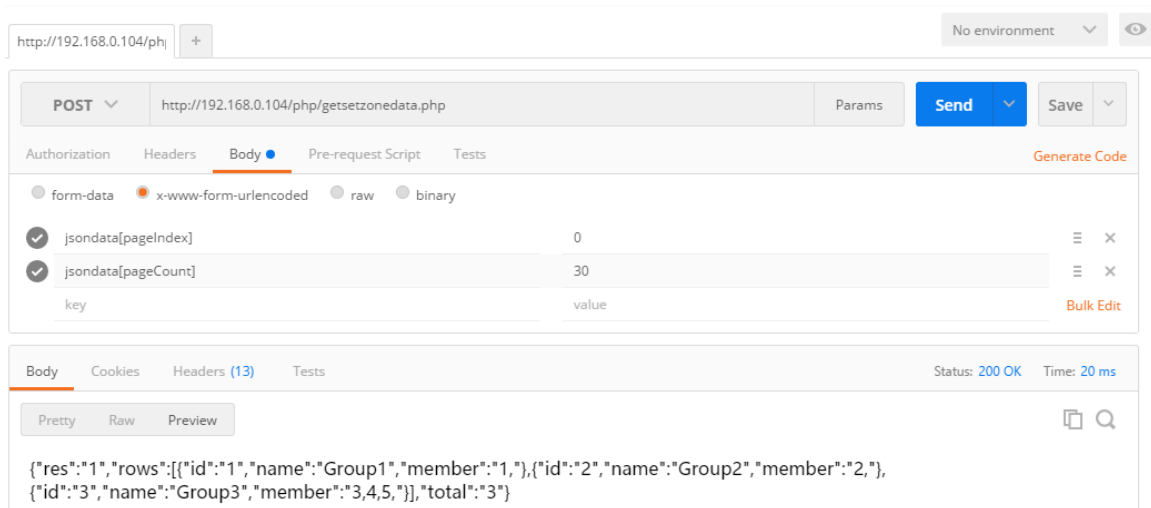

### 1.2 The generated code format is as follows:

`POST /php/getsetzonedata.php HTTP/1.1`

`Host: 192.168.0.104`

`Cache-Control: no-cache`

`Content-Type: application/x-www-form-urlencoded`

`jsondata%5BpIndex%5D=0&jsondata%5BpCount%5D=30`

### 1.3 The way of calling HTML/js/Ajax is as follows:

```
function loaderZoneData(pIndex, pCount) {
    var jsonData = {
        "pageIndex": pIndex,
        "pageCount": pCount
    };
    $.ajax({
        type: "POST",
        url: "192.168.0.104/php/getsetzonedata.php",
        dataType: "json",
        data: { "jsondata": jsonData },
        success: function(resData) {
            // Manipulation data
        },
        error: function() {
        }
    });
}
```

## 2. Detailed description of API

### 2.1 To obtain system version information

Path: /php/getversiondata.php

Call parameters: None

Return data:

```
{“sipver”:”V1.0.0(20170926)”,”msver”:””,”sdkver”:”v1.0.0(2017-10-13)”,”eslver”:”V1.0(2017-09-08)”,”messagetarget”:”9990001-9990999”}.
```

| Field name    | Description             |
|---------------|-------------------------|
| sipver        | Core server version     |
| msver         | Media server version    |
| sdkver        | Application SDK version |
| eslver        | Core SDK version        |
| messagetarget | Intercom system number  |

### 2.2 To obtain zone information

Path: /php/getsetzonedata.php

Call parameters: jsondata[pageIndex]: Page number (Starting from 0)

jsondata[pageCount]: The number of zones per page (For example: To request data from zone 10-20, pageIndex is 1, pageCount is 10)

Return data:

```
{“res”:”1”,”rows”:[{“id”:”1”,”name”:”Group1”,”member”:”1,”},{“id”:”2”,”name”:”Group2”,”member”:”2,”},{“id”:”3”,”name”:”Group3”,”member”:”3,4,5,”}],”total”:”3”}
```

| Field name | Description                                                   |
|------------|---------------------------------------------------------------|
| res        | Succeed in calling interface? (1: success 0: failure)         |
| id         | Zone ID                                                       |
| name       | Zone name                                                     |
| member     | The ID list of IP terminal under a zone (Separated by commas) |
| total      | Total number of zones                                         |

### 2.3 To obtain IP terminal information

Path: /php/getzoneterminaldata.php

Call parameters: jsondata[pageIndex]: Page number (Starting from 0)

jsonData[pageCount]:The number of IP terminals per page (For example: To request data from IP terminal 10-20, pageIndex is 1, pageCount is 10)

jsonData[groupName]: Zone name, (\* Stands for all zones)

jsonData[showType]: Type to be displayed (0: All(Online and Offline); 1: Online only; 2: Offline only)

jsonData[user]: Current login user account

jsonData[simple]: Content to be displayed (1: Brief information 2: Detailed information)

Return data:

```
{“res”:”1”,”rows”:[{“name”:”Terminal1”,”id”:”1”,”ip”:”0.0.0.0”,”state”:”-1”,”bcoutv”:”7”,”bcinv”:”9”,”talkoutv”:”9”,”ilenam”:”9”,”volume”:”9,9,9,7”,”localip”:”0.0.0.0”,”task”:”0”}],”total”:”3”}
```

| Field name | Description                                                                                  |
|------------|----------------------------------------------------------------------------------------------|
| res        | Succeed in calling interface? (1: success 0: failure)                                        |
| id         | Terminal ID                                                                                  |
| name       | Terminal Name                                                                                |
| ip         | Terminal IP address ( <a href="#">Login address</a> )                                        |
| bcoutv     | PA output volume (0-15)                                                                      |
| bcinv      | PA input volume (0-15)                                                                       |
| talkoutv   | Intercom output volume (0-15)                                                                |
| talkinv    | Intercom input volume (0-15)                                                                 |
| volume     | All kinds of types volume (Separated by commas)                                              |
| localip    | Terminal IP address                                                                          |
| state      | Terminal type (-1: Offline; 0: XC type terminal; 1: NAS type terminal; 2: SIP type terminal) |
| task       | Terminal task status (0: Idle; 1: Talkback 2: Monitor; 3: Broadcast)                         |
| total      | Total number of terminals                                                                    |

## 2.4 To filter terminal information

Path: /php/ getsingleterminaldata.php

Call parameters: jsonData[pageIndex]: Page number (Starting from 0)

jsonData[pageCount]:The number of IP terminals per page (For example: To request data from IP terminal 10-20, pageIndex is 1, pageCount is 10)

jsonData[showType]:Type to be displayed (0: All(Online and Offline); 1: Online only; 2: Offline only)

jsonData[user]:Current login user account

jsonData[searchTxt]:Content to be filtered (The system will match fuzzily the terminals which their IDs and names are compliant )

**(More than one terminal information will be filtered if searchTxt contains "," symbol; For example, 1, 3, 8 indicates that the information of terminal 1, 3, 8 will be filtered; The showType does not take effect when the filter mode is ID).**

Return data: Same with chapter 2.3(To obtain IP terminal information)

## 2.5 To control terminal

Path: /php/exesdkcommand.php

Call parameters: jsondata[source]:Original terminal

jsondata[target]:Target terminal (To separate via "-" symbol if there are multiple target terminals, e.g., 2-3)

jsondata[commandtype]: Command type (1: Intercom 2: Monitor 3: Broadcast)

jsondata[isstop]: To stop or not? (0: Start 1: Stop)

jsondata[user]:Current login user account

jsondata[extdata]:The incoming data from third-party platform can be returned to the third-party platform in the push interface.

Return data: { "res": "1" }

| Field name | Description                                           |
|------------|-------------------------------------------------------|
| res        | Succeed in calling interface? (1: success 0: failure) |

## 2.6 To add terminal

Path: /php/newterminal.php

Call parameters: jsondata[tid]: Terminal ID (Non-null string;Int type)

jsondata[tname]: Terminal Name (Non-null string)

jsondata[tbcoutv]: Terminal output volume(0-15) when receiving a broadcast.(Default value is 9)

jsondata[tbcinv]: Terminal input volume (0-15) when initiating a broadcast (Default value is 9)

jsondata[ttalkoutv]: Terminal output volume (0-15) during intercom(Default value is 9)

jsondata[ttalkinv]: Terminal input volume (0-15) during intercom (Default value is 9)

jsondata[tbcttype]: The way to initiate a broadcast (0: Multicast; 1: Unicast)

jsondata[bctrecvtype]: The way to receive a broadcast(0: Multicast; 1: Unicast)

jsondata[tterminallevel]: Priority level(0-15) of terminal(Default value is 0)

jsondata[tcalltimeout]: Call forward time (Default is 30)

jsondata[tcalltarget1]: Call target (To separate by commas, Default symbol is , )

jsondata[tcalltarget2]: Extension Call target (To separate by commas, Default symbol is , )

jsondata[tbctlevel]: Terminal priority level of receiving a broadcast (Default value is 4)

jsondata[ttalklevel]: Terminal priority level of receiving a call (Default value is 3)

jsondata[tmonlevel]: Terminal priority level of being monitored(Default value is 2)

jsondata[tmeetinglevel]: Terminal priority level of receiving a conference(Default value is 1)

jsondata[tbctlist]: Terminal list of being allowed to initiate a broadcast(\*symbol indicates all terminals)

jsondata[ttalklist]: Terminal list of being allowed to initiate a call(\*symbol indicates all terminals)

jsondata[tmonlist]: Terminal list of being allowed to initiate monitoring(\*symbol indicates all terminals)

jsondata[tmeetinglist]: Terminal list of being allowed to initiate a conference(\*symbol indicates all terminals)

jsondata[trtspurl]: To bind external video path (Default path is null)

jsondata[tpass]: Terminal password(Default value is 1234)

Return data: {"res": "1"}

| Field name | Description                                         |
|------------|-----------------------------------------------------|
| res        | Succeed in adding terminal? (1: success 0: failure) |

## 2.7 To modify terminal

Path: /php/setterminal.php

Call parameters: Same with chapter 2.6(To add IP terminal)

Return data: {"res": "1"}

| Field name | Description                                            |
|------------|--------------------------------------------------------|
| Res        | Succeed in modifying terminal? (1: success 0: failure) |

## 2.8 To delete terminal

Path: /php/delterminal.php

Call parameters:

jsondata[tid]: Terminal ID

Return data: {"res": "1"}

| Field name | Description                                           |
|------------|-------------------------------------------------------|
| res        | Succeed in deleting terminal? (1: success 0: failure) |

## 2.9A To query schedule task (Directory)

Path: /php/gettaskdata.php

Call parameters: jsondata[pageIndex]: Page number (Starting from 0)

jsondata[pageCount]: The number of tasks per page (For example: To request data from task 10-20, pageIndex is 1, pageCount is 10)

jsondata[dir]: The directory to which task belongs (Empty indicates the root directory)

jsondata[user]: Current login user account

Return data:

```
{“res”:”1”,”rows”:[{“id”:”53a40581-30bf-4c89-870f-b5ea8621eb99”,”name”:” Temporary notice
_1”,”state”:”0”,”description”:”*”,”isdisable”:”1”,”islostfile”:”0”,”creator”:”admin”,”operation”:”*”,”total”:”1”
}]}
```

| Field name  | Description                                                                                         |
|-------------|-----------------------------------------------------------------------------------------------------|
| res         | 1:To return data successfully 0: Failed to return data                                              |
| id          | Task ID                                                                                             |
| name        | Task name                                                                                           |
| isdisable   | Is task disabled or not? (0: Enabled; 1: Disabled)                                                  |
| state       | Task status (0: Be not running 1: Auto-run 2: To run manually)                                      |
| creator     | The user who creates a task                                                                         |
| islostfile  | Being lost task file?(0: No; 1: Yes)                                                                |
| description | Trigger description (Available to let it be temporarily, please refer to section 2.9B for details)  |
| operation   | Operation description(Available to let it be temporarily, please refer to section 2.9B for details) |
| total       | Total number of tasks                                                                               |

## 2.9B To query schedule task (Single task)

Path: /php/gettaskinfo.php

Call parameters: jsondata[taskId]: Task ID

jsondata[dir]: The directory to which task belongs (Empty indicates the root directory)

Return data:

```
{“id”:”289c503a-620e-45ad-8a6d-9521b6f6666c”,”name”:”1231_1”,”isDisable”:”0”,”createUser”:”admin”,”taskLevel”:”0”,”triggers”:[{“type”:”0”,”startdate”:”2017-09-07”,”enddate”:”2027-09-11”,”starttime”:”17:31:35”,
”scheduletype”:”0”,”weekdays”:””}],”commands”:[{“type”:”0”,”durations”:”0”}]}
```

| Field name      | Description                                                             |
|-----------------|-------------------------------------------------------------------------|
| id              | Task ID                                                                 |
| name            | Task name                                                               |
| isDisable       | Is task disabled or not? (0: Enabled; 1: Disabled)                      |
| createUser      | The user who creates a task                                             |
| taskLevel       | Task priority (0-15)                                                    |
| <b>triggers</b> | <b>Trigger List (Json array)</b>                                        |
| type            | Trigger type (0: Timing trigger; 1: Event trigger)                      |
| startdate       | Start date (e.g., 2017-11-15) [Be valid when type=0]                    |
| enddate         | End date (e.g., 2017-11-15) [Be valid when type=0]                      |
| starttime       | Time to start to execute a task (e.g., 10:28:30) [Be valid when type=0] |

|                    |                                                                                                                                                                                                                                    |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| scheduletype       | Task cycle type (0: Daily; 1: Weekly; 2: A single time) [Be valid when type=0]                                                                                                                                                     |
| weekdays           | Weekdays[Be valid when type=0] included in weekly task are valid only when task cycle type is 1. (To separate weekdays via "<" symbol, e.g., 1<2 indicates that the task will be executed only on Monday and Tuesday of each week) |
| eventtype          | Event Type (0: Alarm; 1: To press a button; 2: To swipe a card; 3: Login; 4: To initiate a call; 5: To initiate monitoring; 6: To initiate a broadcast) [Be valid when type=1]                                                     |
| eventport          | Port number of event be triggered                                                                                                                                                                                                  |
| eventid            | Event terminal list (To separate via "<" symbol) [Be valid when type=1]                                                                                                                                                            |
|                    |                                                                                                                                                                                                                                    |
| <b>commands</b>    | <b>Action List (JSON array)</b>                                                                                                                                                                                                    |
| type               | Action type (0: Delay; 1: Intercom; 2: Monitoring; 3: PA; 4: Command)                                                                                                                                                              |
| durations          | Duration                                                                                                                                                                                                                           |
| talksourceid       | Intercom source terminal ID [Be valid when type=1]                                                                                                                                                                                 |
| talktargetid       | Intercom destination terminal ID [Be valid when type=1]                                                                                                                                                                            |
| talksourcepanel    | Panel number of Intercom source terminal [Be valid when type=1]                                                                                                                                                                    |
| talktargetpanel    | Panel number of Intercom destination terminal [Be valid when type=1]                                                                                                                                                               |
| monitorsourceid    | Monitoring source terminal ID [Be valid when type = 2]                                                                                                                                                                             |
| monitortargetid    | Monitoring destination terminal ID [Be valid when type = 2]                                                                                                                                                                        |
| monitorsourcepanel | Panel number of monitoring source terminal[Be valid when type = 2]                                                                                                                                                                 |
| monitortargetpanel | Panel number of monitoring destination terminal [Be valid when type = 2]                                                                                                                                                           |
| pasourceid         | PA source terminal ID (The value of ID is 0 which means file broadcast; otherwise, terminal broadcast. [Be valid when type = 3]                                                                                                    |
| ispull             | Audio stream type (0: Push stream(Suitable for LAN); 1: Pull stream (Suitable for WAN, Part of terminals have this function)) [Be valid when type = 3]                                                                             |
| volinch            | To adjust volume slightly (-5 - +5; Default value is 0) [Be valid when type = 3]                                                                                                                                                   |
| syncctrl           | To control forced cutting signal synchronously(0: Disabled; 1: Enabled) [Be valid when type = 3]                                                                                                                                   |
| targets            | The terminal list of receiving a broadcast(To separate via < symbol) [Be valid when type = 3]                                                                                                                                      |
| files              | The selected file list to be broadcast (To separate via < symbol) [Be valid when type = 3]                                                                                                                                         |
| filetimes          | The time duration list of selected broadcast files(To separate via < symbol) [Be valid when type = 3]                                                                                                                              |

|              |                                                                                              |
|--------------|----------------------------------------------------------------------------------------------|
| ctrlmsgstart | Action start command [Be valid when type = 4]                                                |
| ctrlmsgstop  | Action end command [Be valid when type = 4]                                                  |
| targets      | The terminal list of receiving a command (To separate via < symbol) [Be valid when type = 4] |

## 2.10 To add a schedule task

Path: /php/addtaskinfo.php

Call parameters: jsondata[taskname]: Task name

jsondata[isdisable]: Is task enabled or not? (0: Enabled; 1: Disabled)

jsondata[level]: Task priority (0-15)

jsondata[creator]: The user who creates a task

jsondata[triggers]: List of triggers (See below description for details)

jsondata[commands]: List of actions (See below description for details)

jsondata[dirname]: The directory to which task belongs (Empty indicates the root directory)

Return data: {"res": "1"}

| Field name | Description                                                |
|------------|------------------------------------------------------------|
| res        | Succeed in adding a schedule task? (1: success 0: failure) |

**triggers: List of triggers** (To separate multiple triggers via "|" symbol; To separate fields of a single trigger via "\*" symbol)E.g.: |0\*2017-10-16\*2027-10-16\*16-35-30\*0\*|1\*0\*1<2<\*1|

The 1st field is the trigger type (0: Timing task 1: Event task) [Please refer to chapter 2.9B for detailed field description]

a) The format of a timing task: 0 \* Start date \* End date \*Time to start to execute a task\* Task cycle type \* Weekly parameters

(E.g.: 0\*2017-10-16\*2027-10-16\*16-35-30\*0\* indicates the timing task which is executed at 16:35:30 every day from 2017-10-16 to 2027-10-16)

(Note: The pass format of "Time to start to execute a task" is 16-35-30 which means 16:35:30)

b) The format of an event task: 1 \* Event type \* Trigger terminal list \* Trigger port

(E.g.: 1\*0\*1<2<\*1 means the alarm event which is triggered by port 1 of terminal 1and terminal 2)

**command: Action task** (To separate multiple triggers via "|" symbol; To separate fields of a single trigger via "\*" symbol )

E.g.: |3\*0\*0\*0\*test1.wav<test2.wav\*1<2\*0\*1|0\*2|

The 1st field is the action type (0: Delay; 1: Intercom; 2: Monitoring; 3: PA; 4: Command)[Please refer to chapter 2.9B for detailed field description]

a) Delay: 0 \* Duration

b) Intercom: 1 \* Duration \* Intercom source terminal ID \* Intercom destination terminal ID \* Panel number of Intercom source terminal \* Panel number of Intercom destination terminal

c) Monitoring: 2\* Duration\* Monitoring source terminal ID \* Monitoring destination terminal ID \* Panel number of monitoring source terminal \* Panel number of monitoring destination terminal

d) PA: 3\* Duration\* PA source terminal ID \* Audio stream type \* File list\* The terminal list of receiving a broadcast \* To adjust volume slightly \* To control forced cutting signal synchronously  
(E.g.: 3\*0\*0\*0\*test1.wav<test2.wav\*1<2\*0\*0 means file(test1.wav and test2.wav) broadcast to terminal 1 and terminal 2

(Note: The **ID value of PA source terminal** is 0 which means **file broadcast**; the value of **duration** is 0 which means **the total time of files** to be played: the sum of playback duration of test1.wav and test2.wav. When the value of duration is bigger than 0, the file broadcast will be forcibly stopped according to practical duration value no matter whether the file is being played completely or not; **Please add "\\" symbol before the file name.**)

e) Command: 4 \* Duration \* Action start command \* Action end command \* The terminal list of receiving a command

## 2.11 To modify a schedule task

Path: /php/modifytaskinfo.php

Call parameters: jsondata[taskname]: Task name  
 jsondata[isdisable]: Is task enabled or not? (0: Enabled; 1: Disabled)  
 jsondata[level]: Task priority (0-15)  
 jsondata[creator]: The user who creates a task  
 jsondata[triggers]: Refer to same field in chapter 2.10  
 jsondata[commands]: Refer to same field in chapter 2.10  
 jsondata[taskId]: Task ID

Return data: {"res": "1"}

| Field name | Description                                                   |
|------------|---------------------------------------------------------------|
| res        | Succeed in modifying a schedule task? (1: success 0: failure) |

## 2.12 To delete a schedule task

Path: /php/exetaskcmd.php

Call parameters: jsondata[taskCommand]: 'deltaskinfo'  
 jsondata[taskId]: Task id

Return data: {"res": "1"}

| Field name | Description                                                  |
|------------|--------------------------------------------------------------|
| res        | Succeed in deleting a schedule task? (1: success 0: failure) |

## 2.13 To start a task manually

Path: /php/exetaskcmd.php

Call parameters: jsondata[taskCommand]: 'runtaskinfo'  
 jsondata[taskId]: Task id

Return data: {"res": "1"}

| Field name | Description                                                  |
|------------|--------------------------------------------------------------|
| res        | Succeed in starting a task manually? (1: success 0: failure) |

## 2.14 To stop a task manually

Path: /php/exetaskcmd.php

Call parameters: jsondata[taskCommand]: 'stoptaskinfo'  
jsondata[taskId]: Task id

Return data: {"res": "1"}

| Field name | Description                                                  |
|------------|--------------------------------------------------------------|
| res        | Succeed in stopping a task manually? (1: success 0: failure) |

## 2.15 To add a zone

Path: /php/zonectl.php

Call parameters: jsondata[zonectrl]: Fixed "add" means to add a zone  
jsondata[newzonename]: Zone ID + "\_" + Zone name (e.g.: 4\_Group4)  
jsondata[members]: The terminals under the zone, to separate them via comma (e.g.: 1,2,3,)

Return data: {"res": "1"}

| Field name | Description                                       |
|------------|---------------------------------------------------|
| res        | Succeed in adding a zone? (1: success 0: failure) |

## 2.16 To modify a zone

Path: /php/zonemodify.php

Call parameters: jsondata[oldname]: Old zone name: Zone ID + "\_" + Zone name (e.g.: 4\_Group4)  
jsondata[newname]: New zone name: Zone ID + "\_" + Zone name (e.g.: 4\_Group4)  
jsondata[members]: The terminals under the zone, to separate them via comma (e.g.: 1,2,3,)

Return data: {"res": "1"}

| Field name | Description                                          |
|------------|------------------------------------------------------|
| res        | Succeed in modifying a zone? (1: success 0: failure) |

## 2.17 To delete a zone

Path: /php/zonectrl.php

Call parameters:    `jsondata[zonectrl]`: Fixed "del" means to delete a zone  
                       `jsondata[newzonename]`: Zone ID + "\_" + Zone name (e.g.: 4\_Group4)  
                       `jsondata[members]`: Void

Return data:    {"res": "1"}

| Field name | Description                                            |
|------------|--------------------------------------------------------|
| res        | Succeed in deleting a zone? (1: success    0: failure) |

## 2.18 To get a list of media

Path: /php/getmediadata.php

Call parameters:    `jsondata[pageIndex]`: Page number (Starting from 0)  
                       `jsondata[pageCount]`: The number of audio files in media per page (For example: To request audio files data from 10-20, pageIndex is 1, pageCount is 10)  
                       `jsondata[subPath]`: The default path is null which means to query the media files in the root directory;  
                       `jsondata[filter]`: The default symbol is "\*", Available for fuzzy filtering based on media files;

Return data:

```
{ "res": "1", "rows": [ { "id": "1", "name": "bangbang.mp3", "time": "3.00M", "type": "mp3", "durations": "00:03:16" }, { "id": "2", "name": "despactio.mp3", "time": "3.48M", "type": "mp3", "durations": "00:03:47" } ], "total": "2" }
```

| Field name | Description                                                 |
|------------|-------------------------------------------------------------|
| res        | Succeed in calling an interface? (1: success    0: failure) |
| id         | ID of media files                                           |
| name       | Name of media files                                         |
| time       | Size of media files                                         |
| type       | Type of media files                                         |
| durations  | Duration of media files                                     |
| total      | Total number of media files                                 |

## 2.19 To get the actual path to media

Path: /php/getmediapath.php

Call parameters:    Null

Return data: {"fullpath": "C:\\XC9000\\AppServer\\MediaFiles"}


| Field name | Description                                 |
|------------|---------------------------------------------|
| fullpath   | The actual physical path to media in server |

## 2.20 To add media files

Path: /php/addmediadata.php

**(Note: To upload media files is different with other interfaces, please see the following capture data packet and JS call code for details)**

**POSTMAN debugging:**

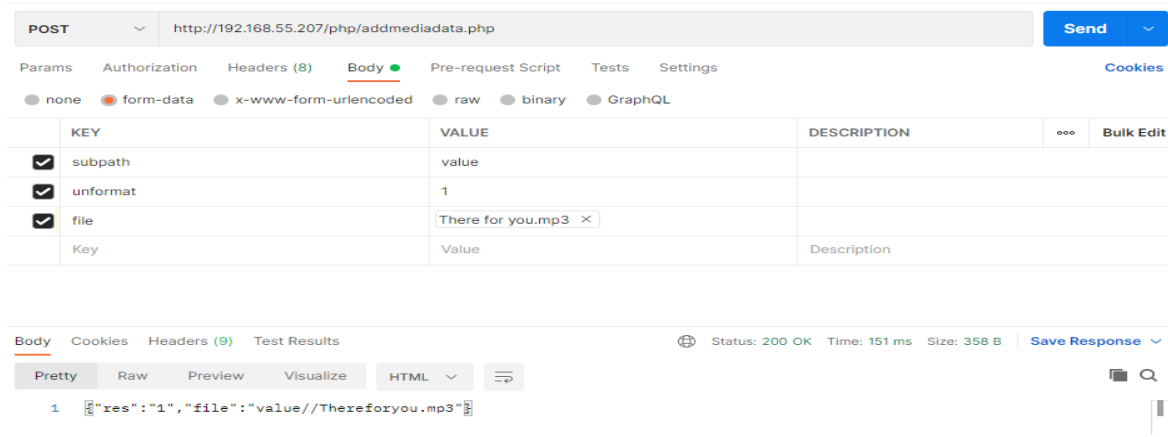

**Capture data packet:**

Response Headers

HTTP/1.1 200 OK  
 Server: nginx/1.10.1  
 Date: Tue, 28 Nov 2017 02:38:59 GMT  
 Content-Type: text/html  
 Transfer-Encoding: chunked  
 Connection: keep-alive  
 X-Powered-By: PHP/5.5.1  
 Expires: Thu, 19 Nov 1981 08:52:00 GMT  
 Cache-Control: no-store, no-cache, must-revalidate, post-check=0, pre-check=0  
 Pragma: no-cache  
 Access-Control-Allow-Origin: \*  
 Access-Control-Allow-Headers: X-Requested-With  
 Access-Control-Allow-Methods: GET,POST,OPTIONS  
 Content-Encoding: gzip

Request Headers

Accept: /\*/\*  
 Accept-Encoding: gzip, deflate  
 Accept-Language: zh-CN,zh;q=0.9  
 Connection: keep-alive  
 Content-Length: 4269960  
 Content-Type: multipart/form-data; boundary=----WebKitFormBoundaryaCSk1zHMe0H67KGT

Cookie:PHPSESSID=5kplbgoh2kafnplcus10bdq215

Host:192.168.1.100

Origin:http://192.168.1.100

Referer:http://192.168.1.100/html/medialist.html

User-Agent:Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/62.0.3202.62 Safari/537.36

### Request Payload

-----WebKitFormBoundaryaCSk1zHMe0H67KGT

Content-Disposition: form-data; name="file"; filename="one.mp3"

Content-Type: audio/mp3

-----WebKitFormBoundaryaCSk1zHMe0H67KGT

Content-Disposition: form-data; name="subpath"

-----WebKitFormBoundaryaCSk1zHMe0H67KGT

Content-Disposition: form-data; name="fullpath"

C:\Work\XC9000\Deploy\AppServer\MediaFiles

-----WebKitFormBoundaryaCSk1zHMe0H67KGT--

### JS call code:

```
function UploadFile(index) {
    currentUploadIndex = index;
    var fileObj = upfiles[index]; // To get file object via js (Supportive of multiple files)
    var url = "../php/addmediadata.php";

    var form = new FormData();
    form.append("file", fileObj);
    form.append("subpath", currentFolder); // Current sub-path, Null is default which means root directory
    form.append("unformat", "1"); // The server will not process uploaded audio files when the value
    // of unformat is 1, otherwise, it will convert the format of uploaded audio files.

    var xhr = createXmlHttpRequest();
    xhr.open("post", url, true);
    xhr.onload = uploadComplete; // To upload complete events
    xhr.onerror = uploadFailed; // To upload failed events
    xhr.upload.onprogress = progressFunction; // To upload events in progress
    xhr.send(form);
}
```

**Return data: {"res": "1", file: "\\mp3\\2.mp3"}**

**res: Succeed in uploading events? (1: successful; 0: failed)**

**file: Returned file name for being called by subsequent interfaces, such as chapter 2.27( To execute tasks quickly)**

## 2.21 To delete media files

Path: /php/delmediadata.php

Call parameters: jsondata[filename]: File name to be deleted; **please add the "\\" symbol before the file name;** (e.g., \\bangbang.mp3)

Return data: {"res": "1"}

| Field name | Description                                              |
|------------|----------------------------------------------------------|
| res        | Succeed in deleting media files? (1: success 0: failure) |

## 2.22 To notify server to update terminal information

Path: /php/reloadxml.php

Call parameters: jsondata[id]: Terminal ID (Null means to notify server to update all terminals)

Return data: {"res": "1"}

| Field name | Description                                              |
|------------|----------------------------------------------------------|
| res        | Succeed in calling an interface? (1: success 0: failure) |

## 2.23 To query recording information

Path: /php/getrecorddata.php

Call parameters: jsondata[pageIndex]: Page number (Starting from 0)

jsondata[pageCount]: The number of recording files per page (For example: To request recording files data from 10-20, pageIndex is 1, pageCount is 10)

jsondata[recordType]: Query Type (0: All 1: Intercom 2: Monitoring 3: PA)

jsondata[recordStart]: Start date (e.g.: 2018-01-09)

jsondata[recordEnd]: End date (e.g.: 2018-01-09)

Return data:

{"res": "1", "rows": [{"rectype": "3", "source": "AppServer1(9990001)", "target": "-", "starttime": "2018-01-09 16:29:00", "filesize": "0.43M", "shortname": "broadcast-9990001.2018-01-09-16-29-00.wav"}], "total": "1"}

| Field name | Description                                                     |
|------------|-----------------------------------------------------------------|
| res        | Succeed in calling an interface? (1: success 0: failure)        |
| rectype    | Type of recording file (0: All 1: Intercom 2: Monitoring 3: PA) |
| source     | Source party                                                    |
| target     | Destination party                                               |
| starttime  | Start time                                                      |
| filesize   | File size                                                       |

|           |                                                                                                                                                   |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| shortname | File name<br>( <b>Note: The full address of the link is <a href="http://Server IP/recordings/">http://Server IP/recordings/</a> + shortname</b> ) |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------|

## 2.24 To set extended text information for terminals

Path: /php/setextdata.php

Call parameters: jsondata[id]: Terminal ID  
jsondata[txt]: Extended text information

Return data: {"res": "1"}

| Field name | Description                                              |
|------------|----------------------------------------------------------|
| res        | Succeed in calling an interface? (1: success 0: failure) |

## 2.25 To upload extended picture information for terminals

Path: /php/addextdata.php

**(Note: The specific format is similar to the method of uploading media files in chapter 2.20)**

JS call codes

```
var fileObj = document.getElementById("res_file").files[0]; // To get file object via js
if (fileObj)
{
    var url = "../php/addextdata.php";

    var form = new FormData();
    form.append("upload", fileObj); // File object
    form.append("id", curselTerid); // Terminal ID
    form.append("index", curExtImgIndex); // Picture serial number (1-4)

    var xhr = new XMLHttpRequest();
    xhr.open("post", url, true);
    xhr.onload = uploadComplete;
    xhr.onerror = uploadFailed;
    xhr.send(form);
}
```

## 2.26 To get extended information of terminals

Path: /php/getextdata.php

Call parameters: jsondata[id]: Terminal ID

Return data:

```
{"id": "1", "exttxt": "123", "extimg1": "1_1.png", "extimg2": "1_2.png", "extimg3": "1_3.png", "extimg4": "1_4.png"
}
```

| Field name | Description |
|------------|-------------|
|------------|-------------|

|         |                                                                                                                                          |
|---------|------------------------------------------------------------------------------------------------------------------------------------------|
| id      | Terminal ID                                                                                                                              |
| exttxt  | Extended text information                                                                                                                |
| extimg1 | 1st Extended picture information<br>(The actual path is <a href="http://Server IP/memberext/">http://Server IP/memberext/</a> + extimg1) |
| extimg2 | 2nd Extended picture information                                                                                                         |
| extimg3 | 3rd Extended picture information                                                                                                         |
| extimg4 | 4th Extended picture information                                                                                                         |

## 2.27 To execute tasks quickly

Path: /php/exeRealPlayFile.php

Call parameters:

| jsondata[rtype]:  | startbct(Start broadcasting)                                                                                                                               | stopbct(Stop broadcasting)                                                                                                                             |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| jsondata[param1]: | The terminal list of receiving a broadcast, to separate via < symbol(E.g., 1<2<3 means to initiate broadcasting to terminal 1,2,3 )                        | Internal number which is need to stopped, Its value is null which means to stop all broadcasting;<br>Please refer to the return data description below |
| jsondata[param2]: | Audio source type (0: File; 1: Terminal; 2: Sound card( <b>A sound card is necessary to be installed in server</b> ); 3: Text)                             | GUID number which is corresponding to broadcasting and need to stopped;<br>Please refer to the return data description below                           |
| jsondata[param3]  | PA source terminal ID (Be valid when audio source type = 1, otherwise, PA source terminal ID = 0)                                                          |                                                                                                                                                        |
| jsondata[param4]  | Text (Be valid when audio source type = 3,otherwise, Text="test")                                                                                          |                                                                                                                                                        |
| jsondata[param5]  | File list to be broadcast <b>【</b> Be valid when audio source type = 0, To separate via < symbol (E.g., <a href="#">\\1.mp3&lt;\\mp3\\2.mp3</a> ) <b>】</b> |                                                                                                                                                        |
| jsondata[param6]  | Duration, The audio file will be looped when its file length is shorter than duration time [The default value of duration is 0]                            |                                                                                                                                                        |
| jsondata[param7]  | Times of text to be broadcast (Be valid when audio source type = 3)                                                                                        |                                                                                                                                                        |
| jsondata[param8]  | The speed of broadcasting text [The range is from -10 to 10,                                                                                               |                                                                                                                                                        |

|                   |                                                                                                                |  |
|-------------------|----------------------------------------------------------------------------------------------------------------|--|
|                   | The default value is 0 which means normal speech rate] (Be valid when the audio source type =3)                |  |
| jsondata[extdata] | The incoming data from third-party platform can be returned to the third-party platform in the push interface. |  |

Return data: {"res": "1"}

| Field name    | Description                                                                                                                                                                       |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| res           | Succeed in calling an interface? (1: success 0: failure)                                                                                                                          |
| <b>number</b> | <b>The internal number returned when starts to call broadcasting; it will be called when stops to broadcast</b>                                                                   |
| <b>guid</b>   | <b>The unique number returned when starts to call broadcasting; it will be called when stops to broadcast<br/>("guid" will be judged first by the program and "number" next )</b> |

## 2.28 To adjust terminal volume

Path: /php/settervolume.php

Call parameters: jsondata[terid]: Terminal ID

jsondata[talkinv]: Terminal input volume (0-15) during intercom

jsondata[talkoutv]: Terminal output volume (0-15) during intercom

jsondata[bcinv]: Terminal input volume (0-15) when initiating a broadcast

jsondata[bcoutv]: Terminal output volume(0-15) when receiving a broadcast

Return data: {"res": "1"}

| Field name | Description                                             |
|------------|---------------------------------------------------------|
| res        | Succeed in calling an interface? (1: success 0:failure) |

## 2.29 To control terminal short-circuit output

Path: /php/teriocontrol.php

Call parameters: jsondata[terid]: Terminal ID

jsondata[ioport]: The port number of short-circuit output (501 means port 1, 502 means port 2, etc.)


jsondata[isopen]: 1 means closed; 0 means open

Return data: {"res": "1"}

| Field name | Description                                             |
|------------|---------------------------------------------------------|
| res        | Succeed in calling an interface? (1: success 0:failure) |

### 3. To push message

3.1 To add Http push address on SDK configuration page in the server software, Please see the picture below:

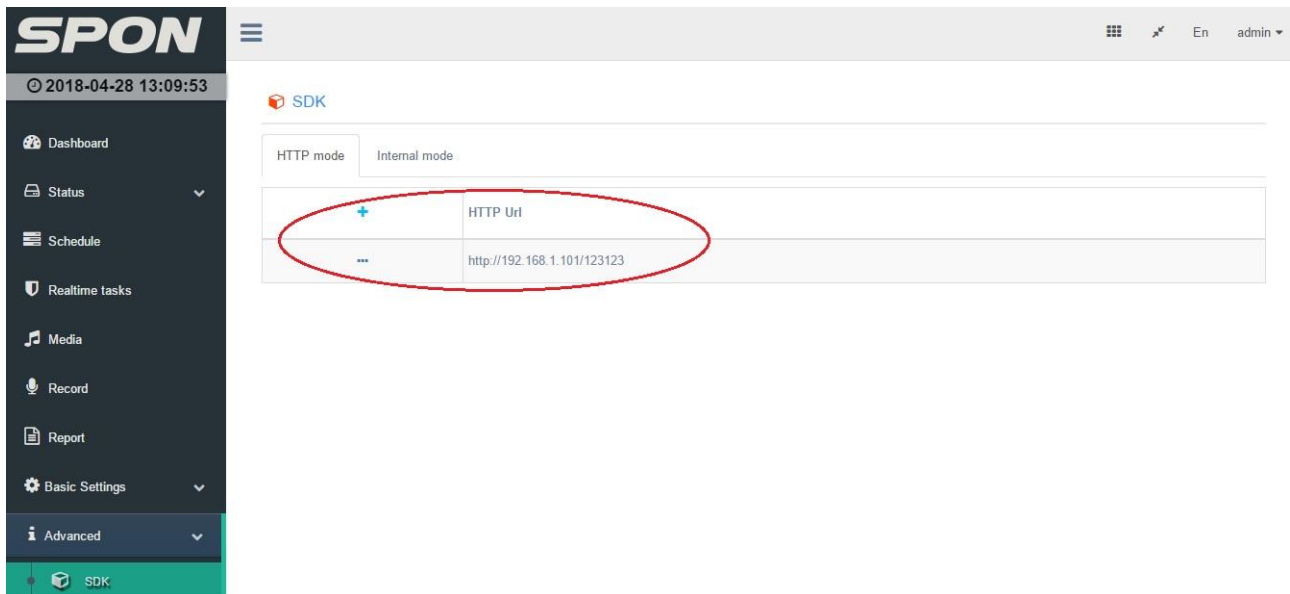

3.2 The method of pushing data is POST; The Content-Type format is "application / x-www-form-urlencoded"; The format of the pushing data is jsondata [xxx]; Please refer to the next section for specific format. The third party application needs to return JSON message after receiving message according to the specified format, the format is as follows:

```
{
  "res": "1"           // The value of "res" is 1 indicates to receive data
                        successfully, otherwise, the system will retransmit data
}
```

3.3 Detailed description of pushing data parameters:

jsondata[uuid]: Unique ID

jsondata[type]: Event type (Please refer to the table below for detailed parameter values)

jsondata[time]: Event time

jsondata[sourceid]: Source party device ID

jsondata[targetid]: Destination party device ID (To separate multiple destination party devices via "-" symbol)

jsondata[state]: Status (Please refer to the table below for detailed parameter values)

jsondata[file]: Event-related recording file (This field has a value when the type of Intercom/Monitoring/PA begins)

**Note: The full path of corresponding http is http://Server IP/records/+jsondata [file]**

jsondata[sourcename]: Source party device name

jsondata[targetname]: Destination party device name

jsondata[sourceext]: Extended information of source party device

jsondata[targetext]: Extended information of destination party device

jsondata[extdata]: The incoming data from third-party platform in chapter 2.5/2.27

| Event type[type] | Status [state]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1: Login         | 1: Log in 2: Log out                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 2. Intercom      | 0: Stop 1: Calling 2: Talking                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 3. Monitoring    | 0: Stop 1: Calling 2: Talking                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 4. PA            | 0: Stop 2: Receiving a broadcast in progress 3: Initiating a broadcast in progress                                                                                                                                                                                                                                                                                                                                                                                                               |
| 5. Alarm         | <p>(1): Alarm triggered by IO port<br/> (In this situation, the value of targetid is "Alarm type_IO port number_IO port status")<br/> Alarm type:</p> <p>1: IO port input alarm<br/> 2: Tamper alarm<br/> 3: Loop detection alarm<br/> 4: Sound alarm<br/> 5: Patrol alarm<br/> 6: IO port output alarm<br/> 7: Amplifier alarm<br/> 8: Zone alarm</p> <p>Status: 1: Closed 0: Open</p> <p>7: Alarm triggered by swiping card<br/> (In this situation, the value of targetid is card number)</p> |