

Introduction To React

Introduction to React

React is a JavaScript library for building user interfaces. But why do we need it? Let's understand from first principles.

Problem Statement

Task: Create multiple HTML elements with styles, className, id, and text content using JavaScript.

Without any helper (Traditional way):

```
// Create first element
const h1 = document.createElement('h1');
h1.style.backgroundColor = 'orange';
h1.style.color = 'black';
h1.style.fontSize = '30px';
h1.id = 'first';
h1.className = 'ele1';
h1.textContent = 'Hello Coder Army';
document.getElementById('root').appendChild(h1);

// Create second element
const p = document.createElement('p');
p.style.color = 'blue';
p.id = 'para';
p.className = 'text';
p.textContent = 'This is a paragraph';
document.getElementById('root').appendChild(p);
```

```
// Create third element... (repetitive!)
```

Problems:

1. Repetitive code
2. Hard to maintain
3. Error-prone
4. Not reusable

Solution 1: Create Our Own Helper Library

Let's create a simple library to make element creation easier:

```
const React = {
  createElement: function(tag, attribute, children){
    const element = document.createElement(tag);

    for(const key in attribute){
      if(key === 'style'){
        Object.assign(element.style, attribute[key]);
      }
      else {
        element[key] = attribute[key];
      }
    }

    element.textContent = children;
    return element;
  }
};

const ReactDOM = {
  render: function(element, root){
    root.appendChild(element);
  }
};
```

```
}  
};
```

Usage:

```
const element1 = React.createElement(  
  'h1',  
  {  
    style: {backgroundColor: "orange", color: "black", fo  
ntSize: "30px"},  
    id: "first",  
    className: "ele1"  
  },  
  "Hello Coder Army"  
);  
  
ReactDOM.render(element1, document.getElementById('root'));
```

Benefits:

-  Cleaner code
-  Reusable
-  Easy to create multiple elements

Moving to Real React

Our library works, but let's use the actual React library via CDN:

```
<!DOCTYPE html>  
<html>  
<head>  
  <title>React App</title>  
</head>  
<body>  
  <div id="root"></div>
```

```

<!-- React CDN -->
<script crossorigin src="https://unpkg.com/react@18/umd/r
eact.development.js"></script>
<script crossorigin src="https://unpkg.com/react-dom@18/u
md/react-dom.development.js"></script>

<script>
  const element = React.createElement(
    'h1',
    {
      style: {backgroundColor: "orange", color: "bl
ack", fontSize: "30px"},
      id: "first",
      className: "ele1"
    },
    "Hello Coder Army"
  );

  const root = ReactDOM.createRoot(document.getElementB
yId('root'));
  root.render(element);
</script>
</body>
</html>

```

Notice: The code looks similar, but there are differences in how React actually works internally.

How React Actually Works (Deep Dive)

Key Concept: Virtual DOM

Our library directly creates real DOM elements. But **real React does something different.**

What React.createElement Actually Returns:

```
const React = {
  createElement: function(type, props, children){
    return { // Returns a plain JavaScript object (Virtual DOM)
      type: type,
      props: {
        ...props,
        children: children
      }
    };
  }
};
```

Example:

```
const element = React.createElement('h1', { id: 'title' }, 'Hello');

console.log(element);
// Output: (Just a JavaScript object!)
// {
//   type: 'h1',
//   props: {
//     id: 'title',
//     children: 'Hello'
//   }
// }
```

This object is called **Virtual DOM** - it's NOT a real DOM element, just a description of what we want.

What ReactDOM Actually Does:

ReactDOM takes the Virtual DOM object and converts it to real DOM:

```
const ReactDOM = {
  createRoot: function(container){
    return {
      render: function(reactElement){
        // Convert Virtual DOM to Real DOM
        const element = document.createElement(reactElement.type);

        for(const key in reactElement.props){
          if(key === 'style'){
            Object.assign(element.style, reactElement.props.style);
          }
          else if(key === 'children'){
            element.textContent = reactElement.props[key];
          }
          else {
            element[key] = reactElement.props[key];
          }
        }

        container.appendChild(element);
      }
    };
  }
};
```

First Principle: Why Separate React and ReactDOM?

Question: Why two separate libraries?

Answer: Because React creates platform-agnostic descriptions (Virtual DOM), and different renderers convert them to platform-specific UI.

The Flow:

Your Code

↓

`React.createElement()` → Creates Virtual DOM (JavaScript object)

↓

Virtual DOM (works everywhere - web, mobile, PDF, VR)

↓

└─> ReactDOM → Browser (HTML elements)

└─> React Native → Mobile (iOS/Android components)

└─> React PDF → PDF documents

└─> React VR → Virtual Reality

Example: Same Virtual DOM, Different Platforms

The Virtual DOM (same everywhere):

```
const vdom = {
  type: 'View',
  props: {
    style: { padding: 20 },
    children: [
      { type: 'Text', props: { children: 'Hello World' } },
      { type: 'Button', props: { onPress: handleClick, children: 'Click' } }
    ]
  }
};
```

ReactDOM (Web) converts to:

```
<div style="padding: 20px">  
  <span>Hello World</span>  
  <button onClick="handleClick()">Click</button>  
</div>
```

React Native (Mobile) converts to:

```
UIView (padding: 20)  
├ UILabel: "Hello World"  
└ UIButton: "Click" (onPress: handleClick)
```

React PDF converts to:

```
PDF Page  
├ Text: "Hello World" at (x: 20, y: 20)  
└ Rectangle: "Click" at (x: 20, y: 50)
```

Same Virtual DOM, different outputs!

Why This Design?

Without Separation (Bad):

```
// Would need separate code for each platform  
ReactWeb.createElement('button', ...); // For web  
ReactMobile.createElement('button', ...); // For mobile  
ReactPDF.createElement('button', ...); // For PDF
```

With Separation (Good):

```
// Same code works everywhere  
React.createElement('button', ...); // Platform-agnostic
```



```
// Different renderers handle conversion
ReactDOM.render(...);           // Web
ReactDOM.render(...);           // Mobile
ReactDOM.render(...);           // PDF
```

React 18: createRoot vs render

Old Way (React 17):

```
ReactDOM.render(<App />, document.getElementById('root'));
```

New Way (React 18):

```
const root = ReactDOM.createRoot(document.getElementById('root'));
root.render(<App />);
```

Why Separate?


First Principle: Separate "setup" from "action"

```
// Setup (expensive, done ONCE)
const root = ReactDOM.createRoot(container);
// - Find container
// - Setup event system
// - Initialize fiber tree
// - Configure rendering mode

// Render (cheap, done MANY times)
root.render(<App />);
root.render(<App />);
root.render(<App />);
```

Analogy: Opening a bank account (once) vs making transactions (many times).

Summary Diagram

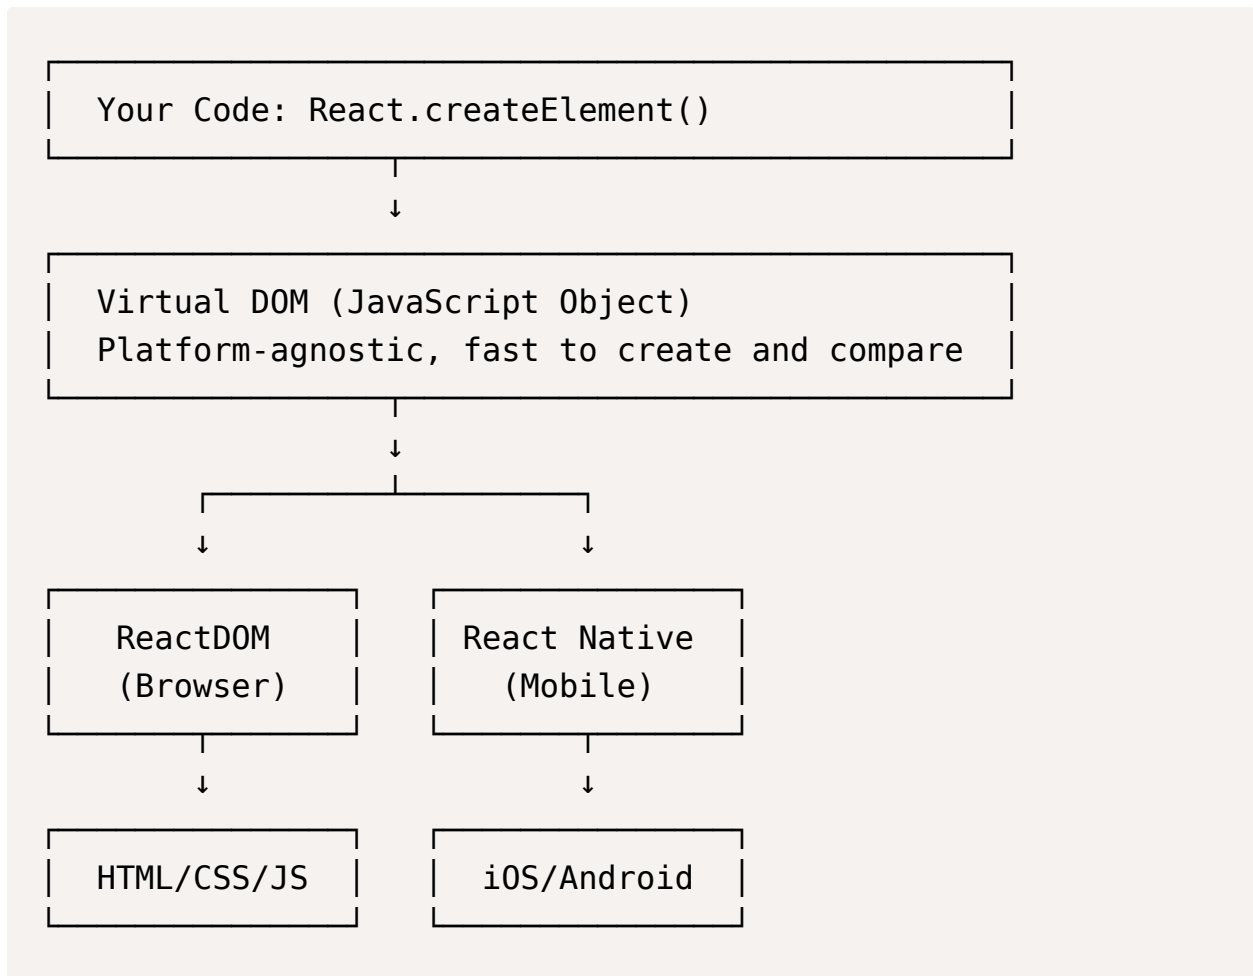

React is the engine, renderers are the wheels for different terrains!

React: It is a js Library

React's Job: The "What" - Its job is only to describe what the UI should look like. It doesn't create DOM elements. It creates lightweight JavaScript objects that act as blueprints.



```
{  
  type: 'h1'  
  props: {  
    style: {},  
    children: {},  
    className:  
    id:  
  }  
}
```

ReactDOM's Job: The "How" - This is the renderer. Its job is to take the blueprint from React and actually build the UI for a specific platform (in this case, a web browser's DOM).



`document.createElement()`

