

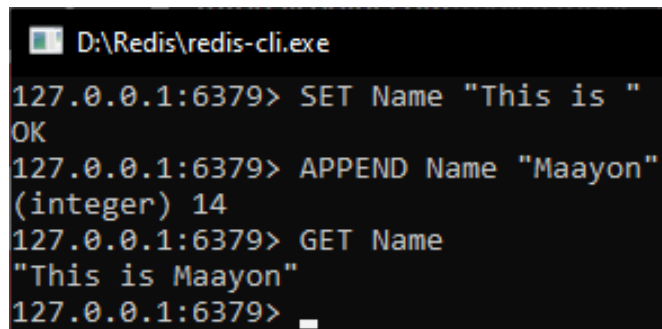
## **APPEND:**

APPEND is string command which is used to append a value to specific key which already owns a value in it.

## **SYNTAX:**

APPEND KEY VALUE

## **EXAMPLE:**

A screenshot of a terminal window titled "D:\Redis\redis-cli.exe". The terminal shows a sequence of commands and their outputs: 1. "127.0.0.1:6379> SET Name "This is " " followed by "OK". 2. "127.0.0.1:6379> APPEND Name "Maayon" " followed by "(integer) 14". 3. "127.0.0.1:6379> GET Name " followed by "\"This is Maayon\"". 4. The prompt "127.0.0.1:6379> " is shown at the end with a cursor.

```
D:\Redis\redis-cli.exe
127.0.0.1:6379> SET Name "This is "
OK
127.0.0.1:6379> APPEND Name "Maayon"
(integer) 14
127.0.0.1:6379> GET Name
"This is Maayon"
127.0.0.1:6379> 
```