


## **GETRANGE:**

GETRANGE is a string command which is used to get a substring from a string which is stored at a specified key.

## **SYNTAX:**

GETRANGE KEY START\_VALUE END\_VALUE

## **EXAMPLE:**

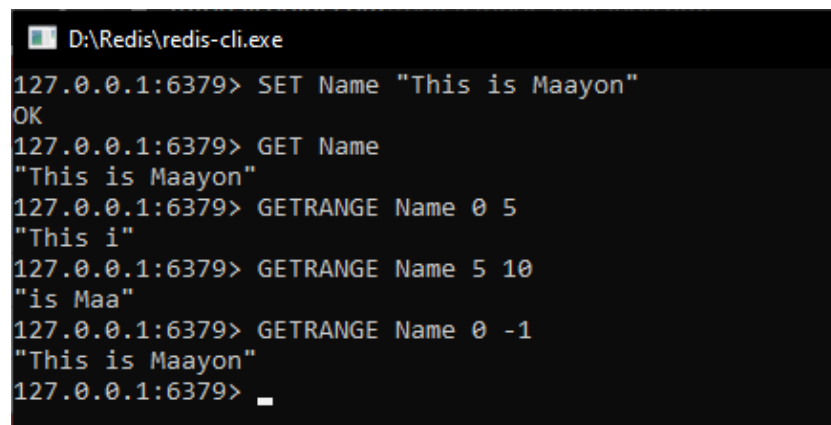

```
D:\Redis\redis-cli.exe
127.0.0.1:6379> SET Name "This is Maayon"
OK
127.0.0.1:6379> GET Name
"This is Maayon"
127.0.0.1:6379> GETRANGE Name 0 5
"This i"
127.0.0.1:6379> GETRANGE Name 5 10
"is Maa"
127.0.0.1:6379> GETRANGE Name 0 -1
"This is Maayon"
127.0.0.1:6379> _
```

Here

KEY = Name

VALUE = This is Maayon