


GETSET:

GETSET is string command which is used to set a value to a specific key and returns its old value. That is it first used to return the value present in the specific key, if no value present in the specific key then it returns “nil” value, else it return the value which is present in the specified key and then it set the new value to the specified key by deleting the old value present in it if so.

SYNTAX:

GETSET KEY VALUE

EXAMPLE:

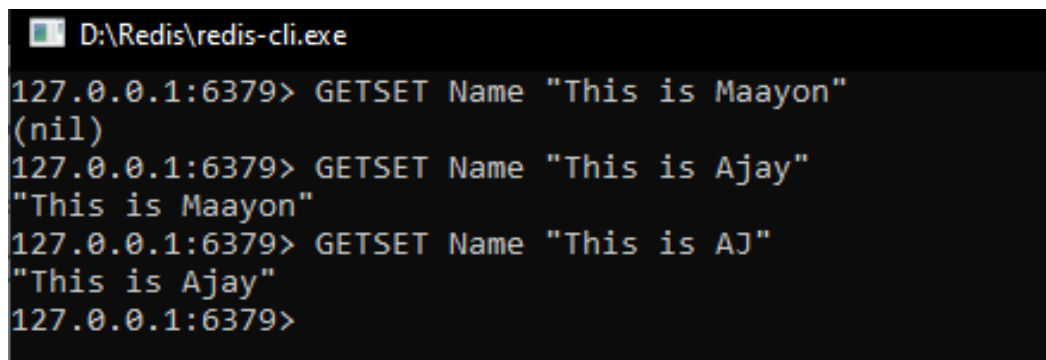

```
D:\Redis\redis-cli.exe
127.0.0.1:6379> GETSET Name "This is Maayon"
(nil)
127.0.0.1:6379> GETSET Name "This is Ajay"
"This is Maayon"
127.0.0.1:6379> GETSET Name "This is AJ"
"This is Ajay"
127.0.0.1:6379>
```

Here

In first GETSET

KEY = Name

VALUE = nil

In second GETSET

KEY = Name

VALUE = This is Maayon

In third GETSET

KEY = Name

VALUE = This is Ajay

And so on...