

HSETNX:


HSETNX is hash command which is used to set value to a specific field, one and only if the field does not exist. It return value 1 or 0.

- 1 indicates that the value has been set to the field.
- 0 indicates that the value has not been set to the field since the field already owns some value in it.

SYNTAX:

HSETNX KEY FIELD

EXAMPLE:

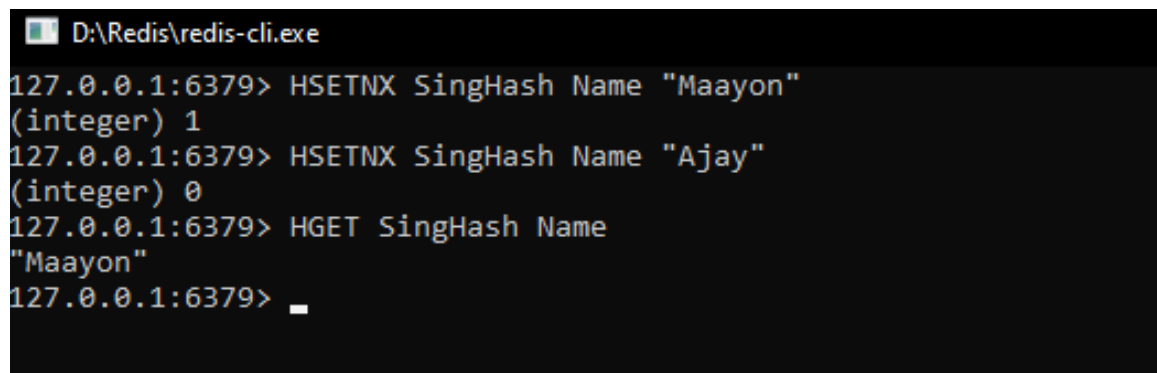

```
D:\Redis\redis-cli.exe
127.0.0.1:6379> HSETNX SingHash Name "Maayon"
(integer) 1
127.0.0.1:6379> HSETNX SingHash Name "Ajay"
(integer) 0
127.0.0.1:6379> HGET SingHash Name
"Maayon"
127.0.0.1:6379> _
```

HERE

- 1 = indicate the value has been set successfully.
- 0 = indicate the value has been not set successfully.