

SETNX:


SETNX is string command which is used to set value to a specific key, one and only if the key does not exist. It return value 1 or 0.

- 1 indicates that the value has been set to the key.
- 0 indicates that the value has not been set to the key since the key already owns some value in it.

SYNTAX:

SETNX KEY VALUE

EXAMPLE:

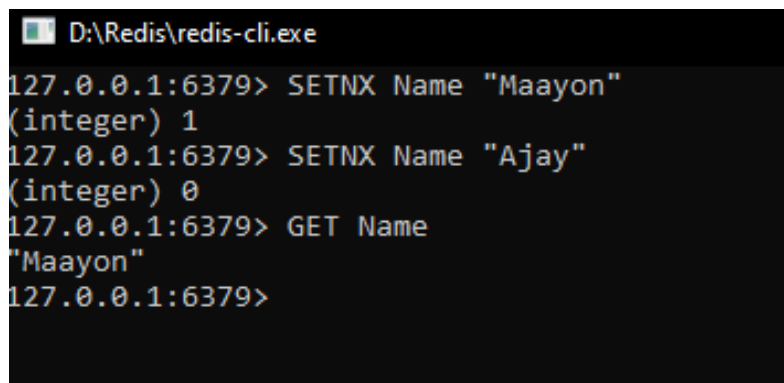

```
D:\Redis\redis-cli.exe
127.0.0.1:6379> SETNX Name "Maayon"
(integer) 1
127.0.0.1:6379> SETNX Name "Ajay"
(integer) 0
127.0.0.1:6379> GET Name
"Maayon"
127.0.0.1:6379>
```

Here

1 = value is set successfully.

0 = value is not set successfully.