

RPUSH & LRANGE:

RPUSH is list command which is used to create or push an element to the list by Left to Right orientation.


LRANGE is used to display an elements in the specified range.

SYNTAX:

RPUSH KEY VALUE_1 VALUE_2 ... VALUE_N

LRANGE KEY START_VALUE END_VALUE

EXAMPLE:

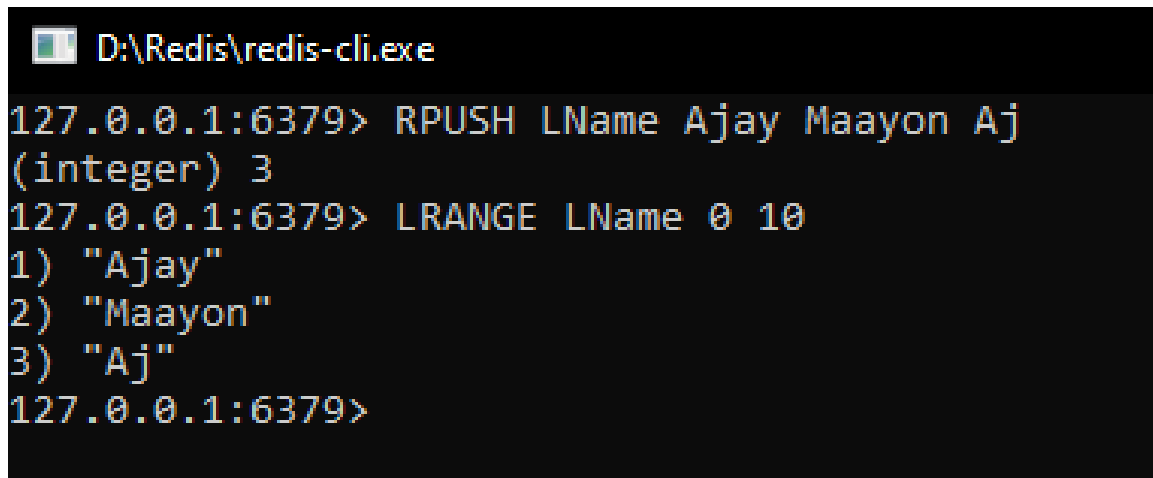

```
D:\Redis\redis-cli.exe
127.0.0.1:6379> RPUSH LName Ajay Maayon Aj
(integer) 3
127.0.0.1:6379> LRANGE LName 0 10
1) "Ajay"
2) "Maayon"
3) "Aj"
127.0.0.1:6379>
```