

## **SET & GET:**

SET is a command which is used to sets the value for a specific key.

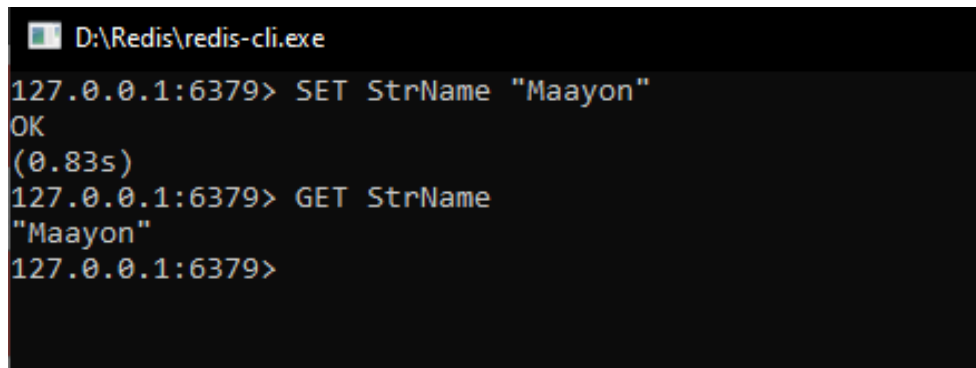
GET is a command which is used to get the value of the specified key.

## **SYNTAX:**

SET KEY VALUE

GET KEY

## **EXAMPLE:**

A screenshot of a terminal window titled "D:\Redis\redis-cli.exe". The terminal shows the following commands and output:

```
127.0.0.1:6379> SET StrName "Maayon"
OK
(0.83s)
127.0.0.1:6379> GET StrName
"Maayon"
127.0.0.1:6379>
```

Here

KEY = StrName

VALUE = Maayon

**NOTE:** The Value of a string may or may not be present inside the double quote.