

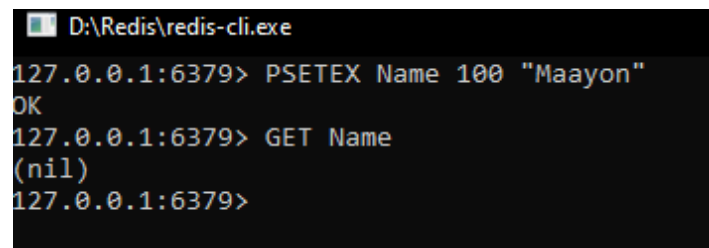
## **PSETEX:**

PSETEX is string command which is used to set the value and expiry time to a specific key.

## **SYNTAX:**

PSETEX KEY MILLISECONDS VALUE

## **EXAMPLE:**

A screenshot of a terminal window titled "D:\Redis\redis-cli.exe". The terminal shows the following commands and output:

```
127.0.0.1:6379> PSETEX Name 100 "Maayon"
OK
127.0.0.1:6379> GET Name
(nil)
127.0.0.1:6379>
```

HERE

KEY = Name

VALUE = Maayon

MILLISECONDS = 100