

## SOURCE CODE FOR STRING:

*# importing redis module*

**import** redis

*# calling redis with its port number on the local machine with an object instance*

r = redis.Redis(host='localhost', port=6379, db=0)

*# printing empty line*

**print**()

*# setting the key and value*

**print**("Did the value is set for the specified key ? :",r.set('Name', 'Ajay')) *# prints true if value is set to the key*


*# printing empty line*

**print**()

*# getting the value from the specified key*

**print**("The Value of the Specified key 'Name' is :",r.get('Name')) *# print the value of the key specified*

## OUTPUT:

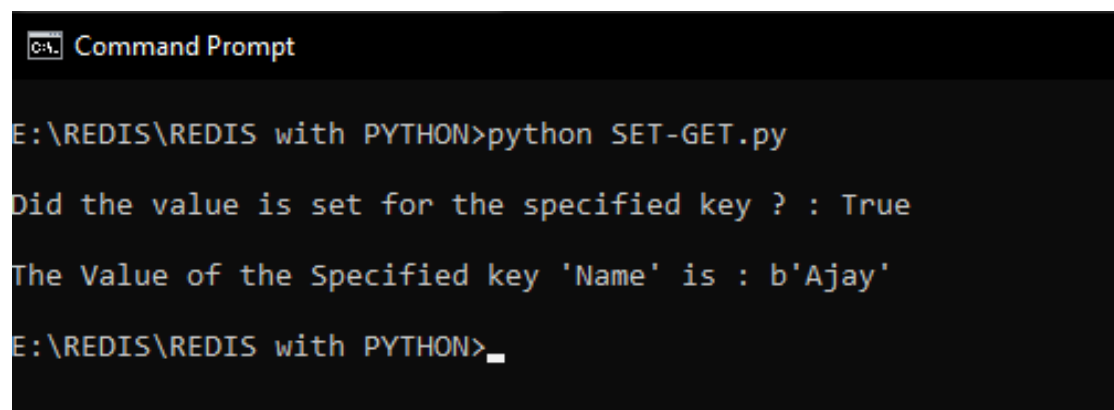

```
C:\> Command Prompt

E:\REDIS\REDIS with PYTHON>python SET-GET.py

Did the value is set for the specified key ? : True

The Value of the Specified key 'Name' is : b'Ajax'

E:\REDIS\REDIS with PYTHON>_
```