


## **LINDEX:**

LINDEX is list command which is used to return a list element based on there index value. BY default elements in the list will be from 0 index to N-1 index, and negative index start from -1 and it indicate the right most element in the list.

## **SYNTAX:**

LINDEX KEY INDEX\_VALUE

## **EXAMPLE:**

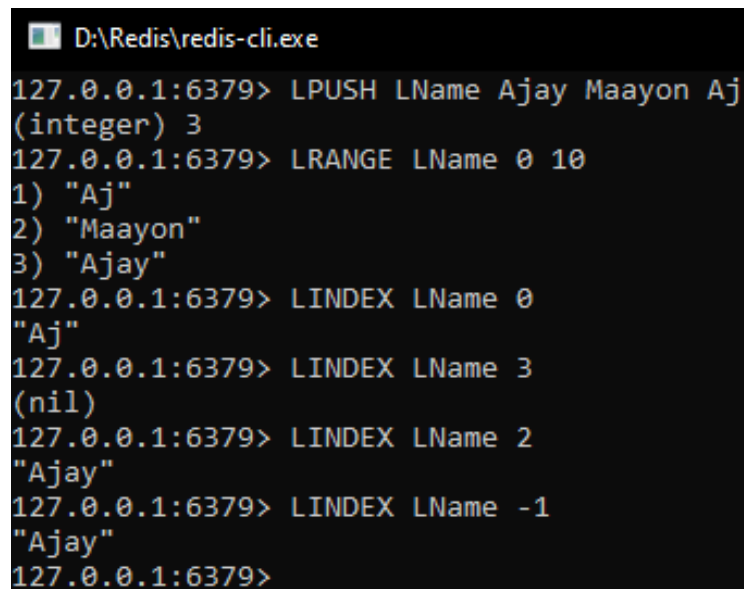

```
D:\Redis\redis-cli.exe
127.0.0.1:6379> LPUSH LName Ajay Maayon Aj
(integer) 3
127.0.0.1:6379> LRANGE LName 0 10
1) "Aj"
2) "Maayon"
3) "Ajay"
127.0.0.1:6379> LINDEX LName 0
"Aj"
127.0.0.1:6379> LINDEX LName 3
(nil)
127.0.0.1:6379> LINDEX LName 2
"Ajay"
127.0.0.1:6379> LINDEX LName -1
"Ajay"
127.0.0.1:6379>
```