



Vidyavardhini's College of Engineering & Technology

Department of Computer Engineering

Aim: To study the Depth Estimation.

Objective: To Capturing Frames from a depth camera, creating a mask from a disparity map, Masking a copy operation, Depth estimation with normal camera.

Theory:

1. Depth Map:

A depth map is a grayscale image that represents the distance of objects from the camera. Each pixel's value indicates the depth or distance of the corresponding point in the real world. Darker areas typically correspond to objects that are farther away, while lighter areas correspond to objects closer to the camera.

2. Point Cloud Map:

A point cloud is a collection of 3D points in a coordinate system, usually obtained from depth information captured by cameras or sensors like LiDAR. Each point in the point cloud corresponds to a specific location in 3D space and may include attributes like color or intensity.

3. Disparity Map:

A disparity map is a 2D representation that encodes the difference in horizontal pixel coordinates between the left and right images of a stereo camera setup. It's used to estimate the depth of objects in the scene. Greater disparities indicate closer objects.

4. Valid Depth Mask:

A valid depth mask is an image or binary mask that identifies which pixels in a depth map have reliable depth values. This mask helps filter out areas with unreliable or missing depth information, which might occur due to occlusion or limitations of the depth sensing technology.



Vidyavardhini's College of Engineering & Technology

Department of Computer Engineering

5. Creating a Mask from a Disparity Map:

This involves using a disparity map to create a mask that highlights certain depth ranges. Pixels within a specified disparity range are included in the mask, while others are excluded. This can help isolate objects of interest based on their distance from the camera.

6. Masking a Copy Operation:

Masking and copy operation involves using a mask to selectively copy certain parts of an image to another image. The mask determines which pixels are copied and which are ignored. This technique is often used to overlay or modify specific regions in an image.

7. Depth Estimation with a Normal Camera:

Depth estimation using a normal camera typically involves using image processing techniques to infer depth information from a single 2D image. Methods might include analyzing object sizes, perspective, shadows, and textures to make educated guesses about relative distances.

Code:

```
import numpy as np
import cv2

from matplotlib import pyplot as plt

# Read two input images
imgL = cv2.imread('left.png')
imgR = cv2.imread('right.png')

# Convert the images to grayscale
grayL = cv2.cvtColor(imgL, cv2.COLOR_BGR2GRAY)
grayR = cv2.cvtColor(imgR, cv2.COLOR_BGR2GRAY)

# Initiate a StereoBM object
stereo = cv2.StereoBM_create(numDisparities=16, blockSize=15)
```



Vidyavardhini's College of Engineering & Technology

Department of Computer Engineering

```
Compute the disparity map disparity = stereo.compute(grayL,  
grayR) # Normalize the disparity map for visualization  
normalized_disparity = cv2.normalize(disparity, None, alpha=0, beta=255,  
norm_type=cv2.NORM_MINMAX, dtype=cv2.CV_8U)  
# Display the disparity map using matplotlib  
plt.imshow(normalized_disparity, cmap='gray')  
plt.title('Disparity Map') plt.colorbar()  
plt.show()  
# Print the shape of the disparity map  
print("Disparity Map Shape:", disparity.shape)
```

Input:

right.png




Left.png





Output:

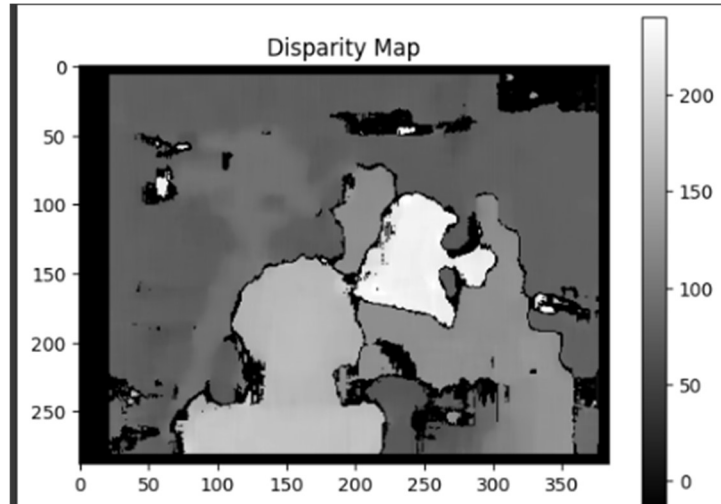

Conclusion:

The process of capturing frames from a depth camera and generating a mask from a disparity map offers valuable insights into scene reconstruction. By effectively masking the copy operation using the derived mask, accurate object extraction becomes achievable. Additionally, integrating depth estimation using a conventional camera enhances the potential for creating more detailed and comprehensive visualizations. This multidimensional approach underscores the significance of merging depth and traditional imaging techniques for advanced perception and analysis applications.