

Distribution of tokens/s over all runs

(a) Timing runs: every prompt × repeat (default thread count)

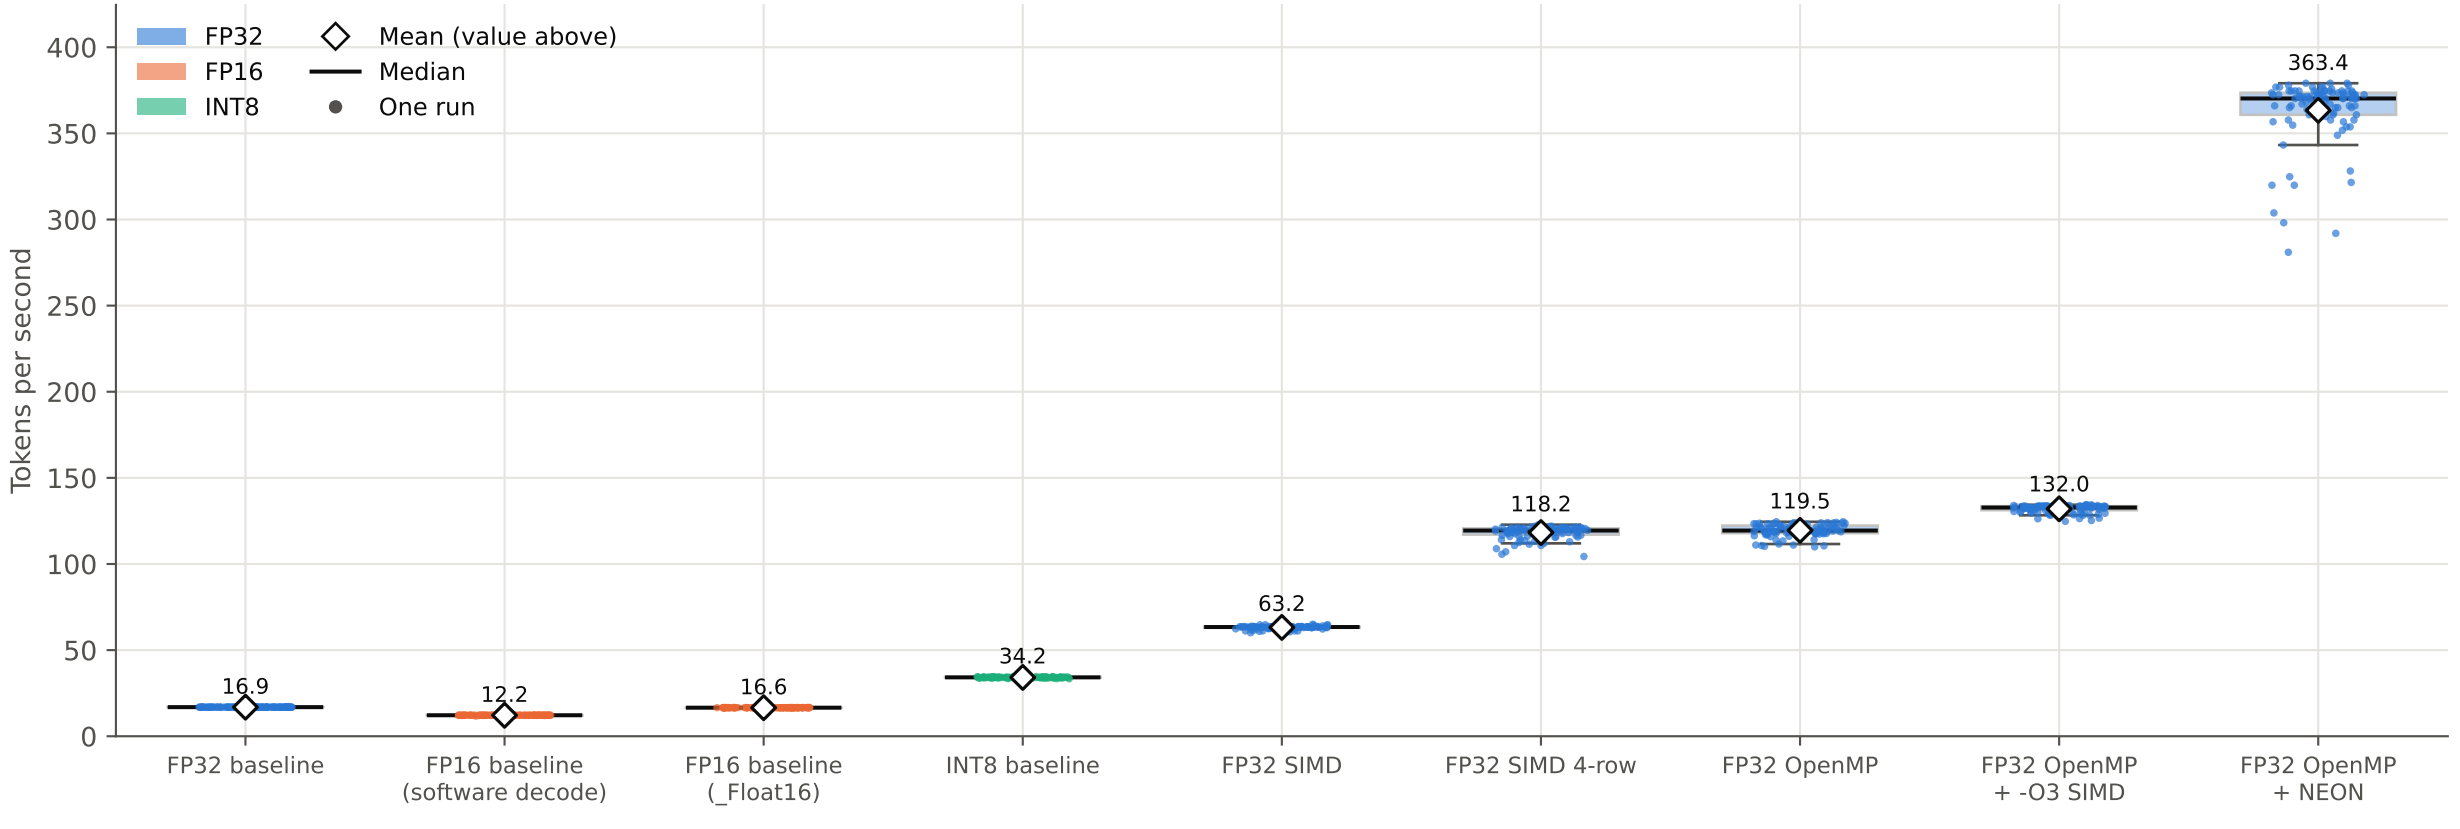

(b) Thread sweep: every prompt × repeat per thread count

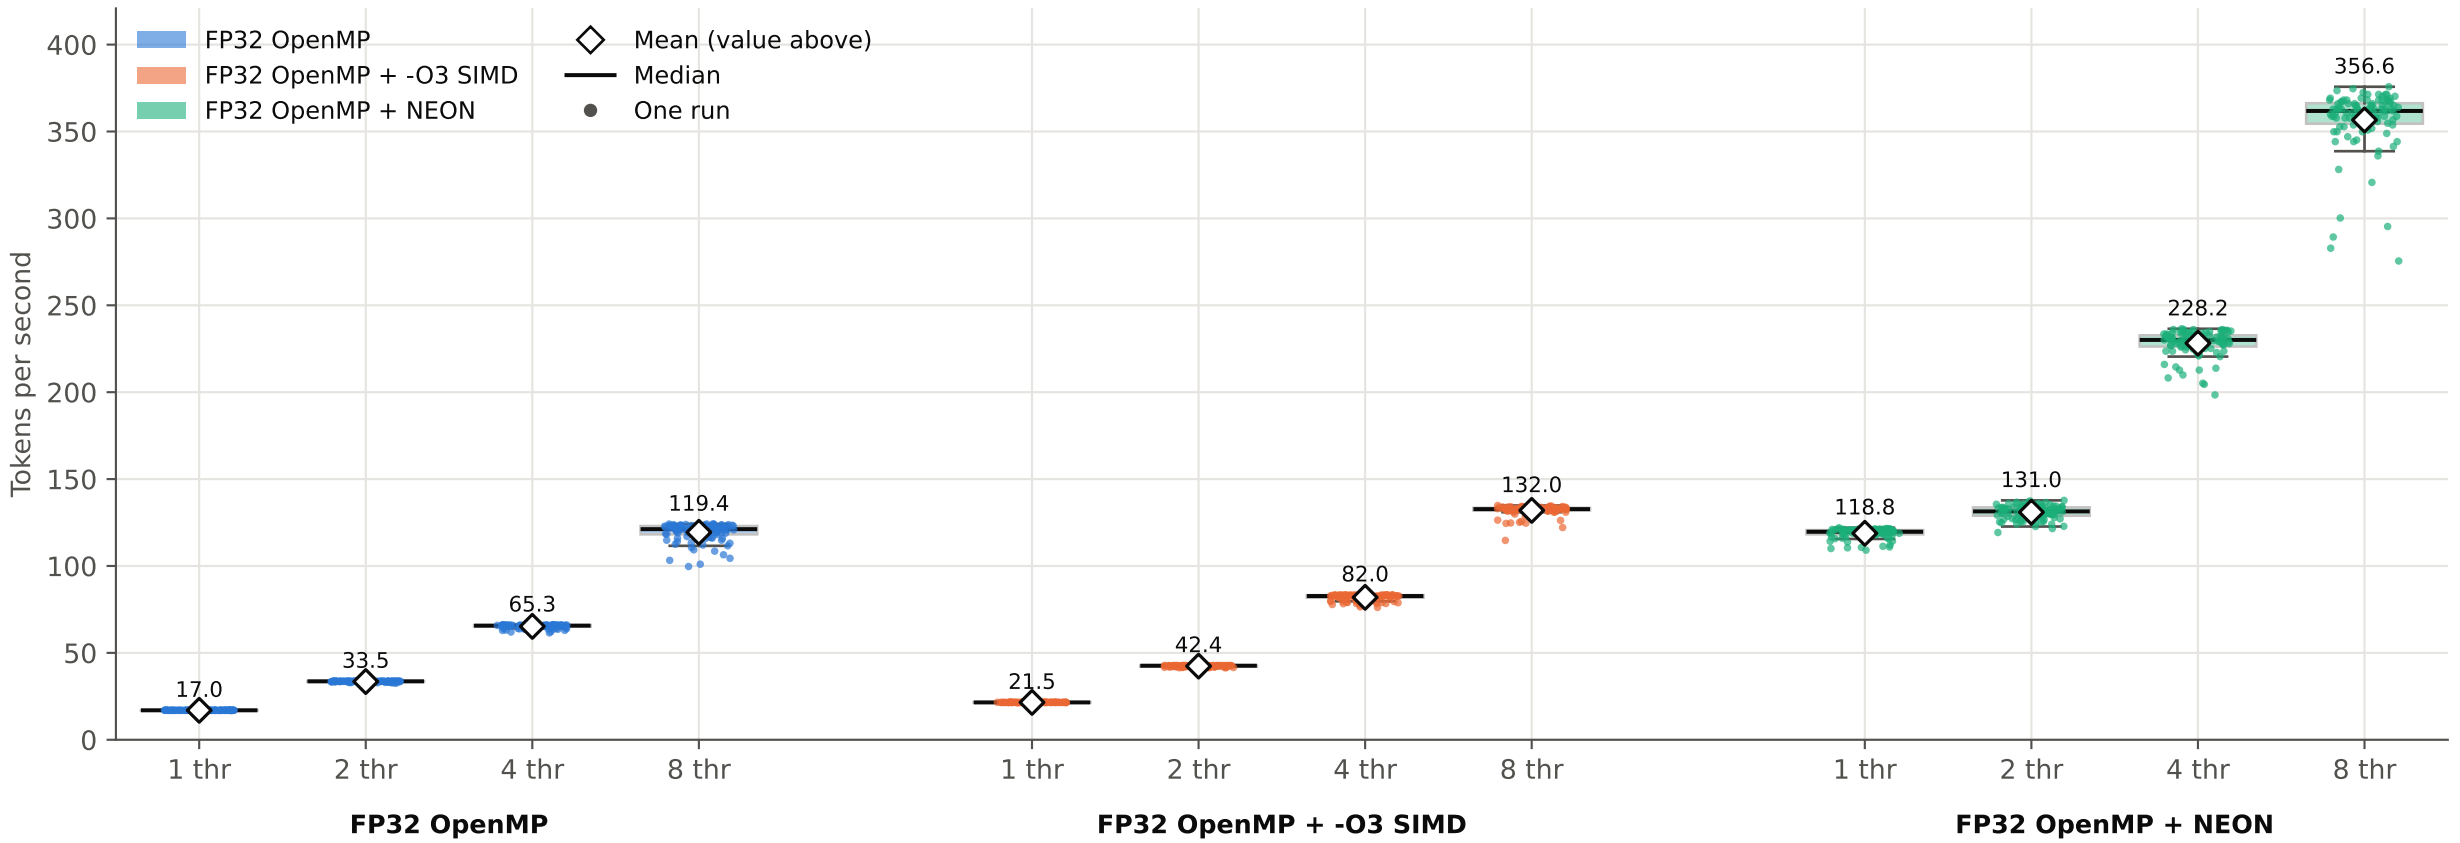

tok/s as printed by each binary: INT8 and FP16 time forward() only, the others include sampling, so compare across binaries with care (wall time is the like-for-like measure).