When the pulses have the same shape, at the crossing, the total displacement is the algebraic sum of their individual displacements and hence its net amplitude is higher than the amplitudes of the individual pulses. Whereas, if the two pulses have same amplitude but shapes are 180° out of phase at the crossing point, the net amplitude vanishes at that point and the pulses will recover their identities after crossing. Only waves can possess such a peculiar property and it is called *superposition of waves*. This means that the principle of superposition explains the net behaviour of the waves when they overlap.

Generalizing to any number of waves i.e, if two or more waves in a medium move simultaneously, when they overlap, their total displacement is the vector sum of the individual displacements. We know that the waves satisfy the wave equation which is a linear second order homogeneous partial differential equation in both space coordinates and time. Hence, their linear combination (often called as linear superposition of waves) will also satisfy the same differential equation.

To understand mathematically, let us consider two functions which characterize the displacement of the waves, for example,

$$y_1 = A_1 \sin(kx - \omega t)$$

and

$$y_2 = A_2 \cos(kx - \omega t)$$

Since, both y_1 and y_2 satisfy the wave equation (solutions of wave equation) then their algebraic sum

$$y = y_1 + y_2$$

also satisfies the wave equation. This means, the displacements are additive. Suppose we multiply y_1 and y_2 with some constant then their amplitude is scaled by that constant Further, if C_1 and C_2 are used to multiply the displacements y_1 and y_2, respectively, then, their net displacement y is

$$y = C_1 y_1 + C_2 y_2$$

This can be generalized to any number of waves. In the case of n such waves in more than one dimension the displacements are written using vector notation.

Here, the net displacement $\vec{y}$ is

$$\vec{y} = \sum_{i=1}^{n} C_i \vec{y_i}$$

The principle of superposition can explain the following :

(a) Space (or spatial) Interference (also known as Interference)

(b) Time (or Temporal) Interference (also known as Beats)

(c) Concept of stationary waves

Waves that obey principle of superposition are called linear waves (amplitude is much smaller than their wavelengths). In general, if the amplitude of the wave is not small then they are called non-linear waves. These violate the linear superposition principle, e.g. laser. In this chapter, we will focus our attention only on linear waves.

We will discuss the following in different subsections:

11.7.1 Interference of waves

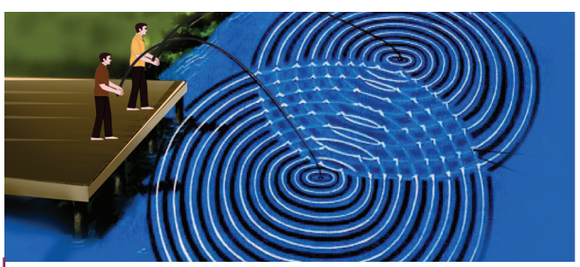


Figure 11.27 Interference of waves

UNIT-11(XI-Physics_Vol-2)_14-08-2020.indd 248 17-08-2020 15:31:03