(b) For destructive interference:


When the trough of one wave overlaps with the crest of another wave, their amplitudes "cancel" each other and we get destructive interference as shown in Figure 11.29 (b). The resultant amplitude is nearly zero. The destructive interference occurs if there is minimum intensity at that point, which means $\cos\varphi = -1 \Rightarrow \varphi = \pi, 3\pi, 5\pi, \ldots = (2\text{ n-1})\ \pi$, where n = 0,1,2,…. i.e. This is the phase difference in which two waves overlap to give destructive interference. Therefore,

$$I_{\text{minimum}} = \left(\sqrt{I_1} - \sqrt{I_2}\right)^2 = \left(A_1 - A_2\right)^2$$

Hence, the resultant amplitude

$$A = |A_1 - A_2|$$

Let us consider a simple instrument to demonstrate the interference of sound waves as shown in Figure 11.30.



BU6L5R

Figure 11.30 Simple instrument to demonstrate interference of sound waves

A sound wave from a loudspeaker S is sent through the tube P. This looks like a T-shaped junction. In this case, half of the sound energy is sent in one direction and the remaining half is sent in the opposite direction. Therefore, the sound waves that reach the receiver R can travel along either of two paths. The distance covered by the sound wave along any path from the speaker to receiver is called the path length . From the Figure 11.30, we notice that the lower path length is fixed but the upper path length can be varied by sliding the upper tube i.e., is varied. The difference in path length is known as path difference,

$$\Delta r = |r_2 - r_1|$$

Suppose the path difference is allowed to be either zero or some integer (or integral) multiple of wavelength λ. Mathematically, we have

$$\Delta r = n\lambda \qquad \text{where, n = 0, 1, 2, 3,....}$$

Then the two waves arriving from the paths r_1 and r_2 reach the receiver at any instant are in phase (the phase difference is 0° or 2π) and interfere constructively as shown in Figure 11.31.

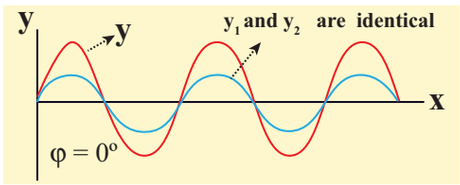


Figure 11.31 Maximum intensity when the phase difference is 0°

Therefore, in this case, maximum sound intensity is detected by the receiver. If the path difference is some half-odd-integer (or half-integral) multiple of wavelength λ, mathematically, $\Delta r = n\dfrac{\lambda}{2}$

where, n = 1,3,... (n is odd)

then the two waves arriving from the paths r_1 and r_2 and reaching the receiver at any instant are out of phase (phase difference of π or 180°). They interfere destructively as shown in Figure 11.32. They will cancel each other.

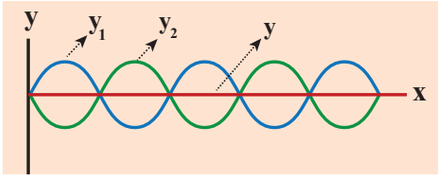


Figure 11.32 Minimum intensity when the phase difference is 180°

UNIT-11(XI-Physics_Vol-2)_14-08-2020.indd 250 17-08-2020 15:31:05