
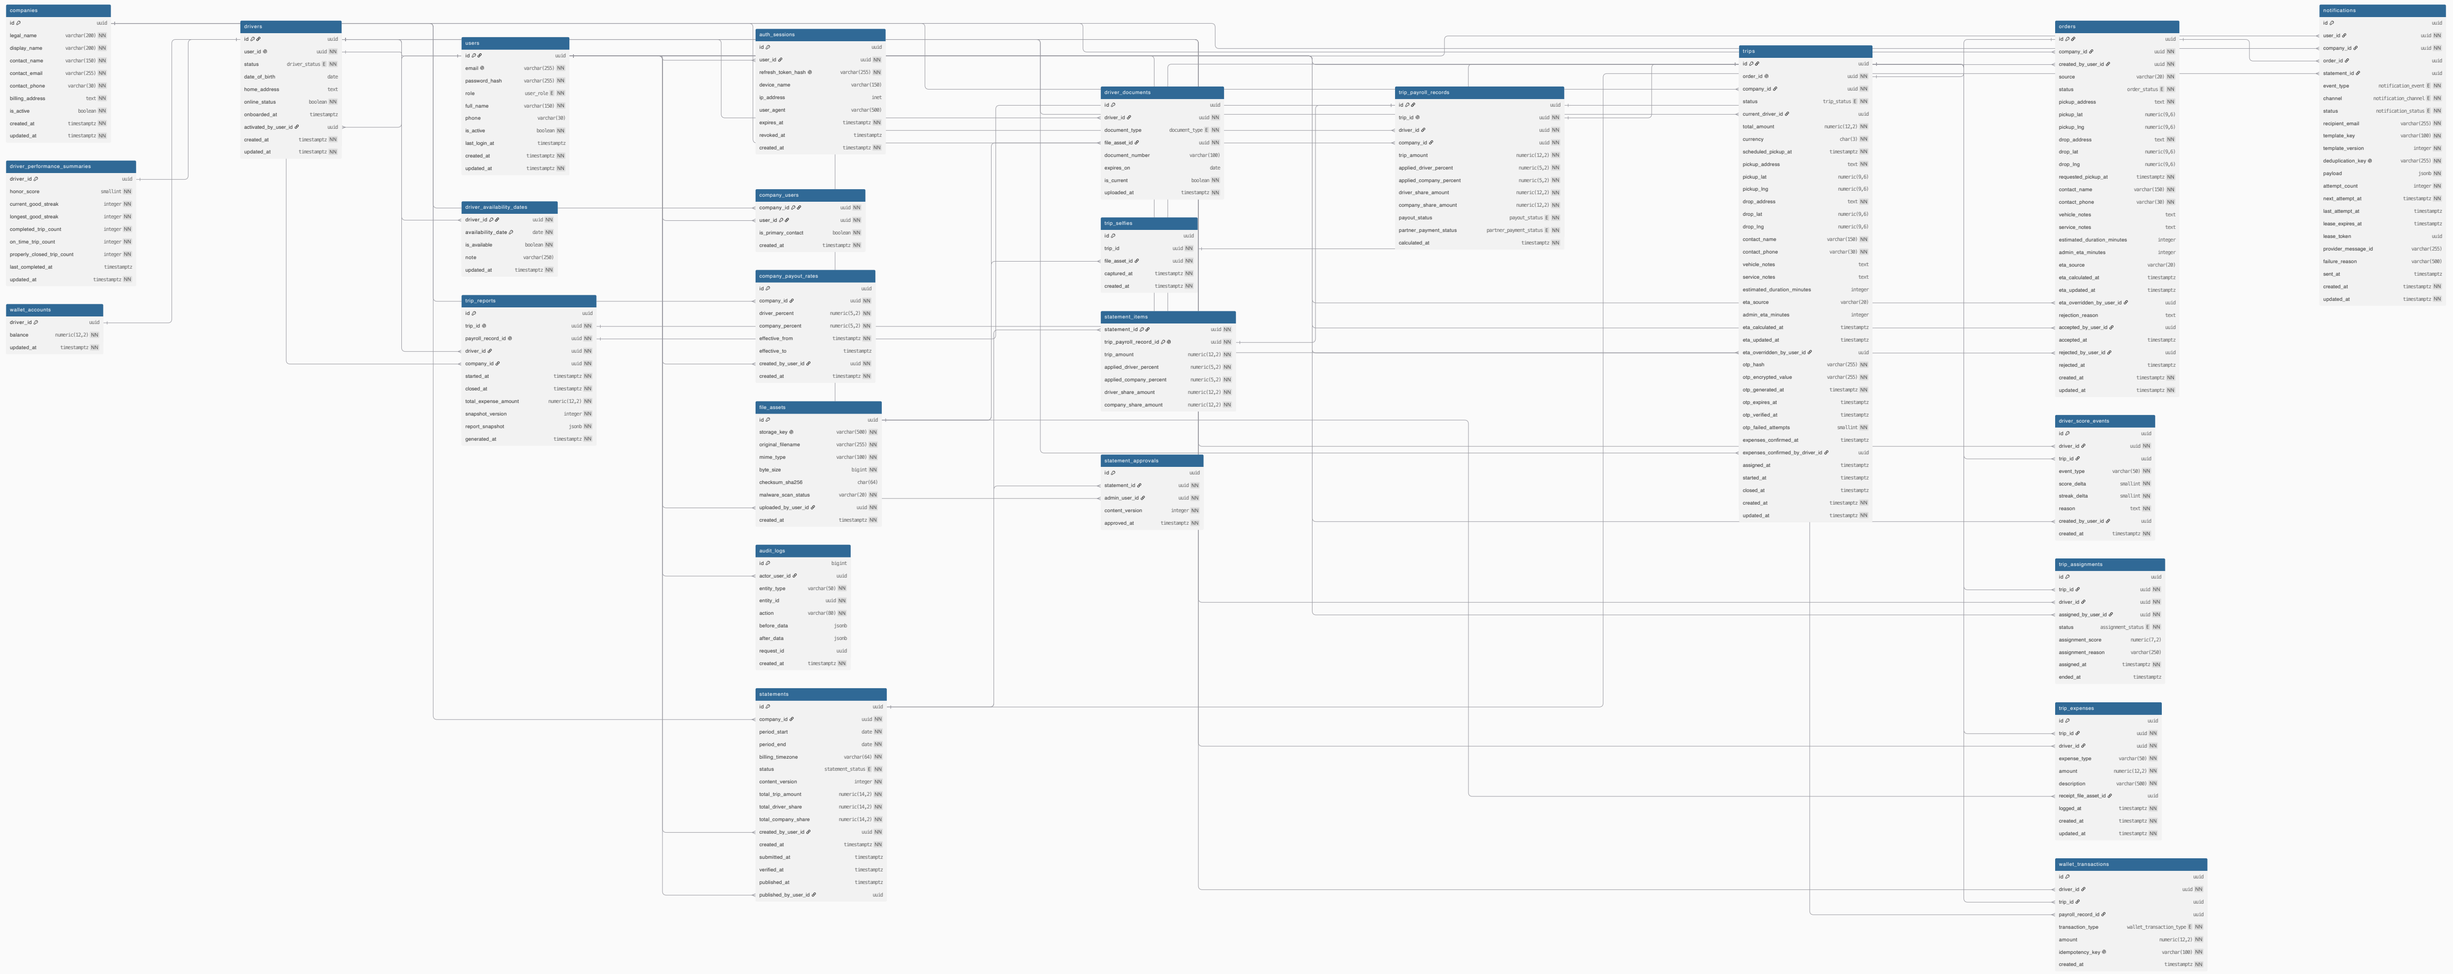



dbdiagram.io

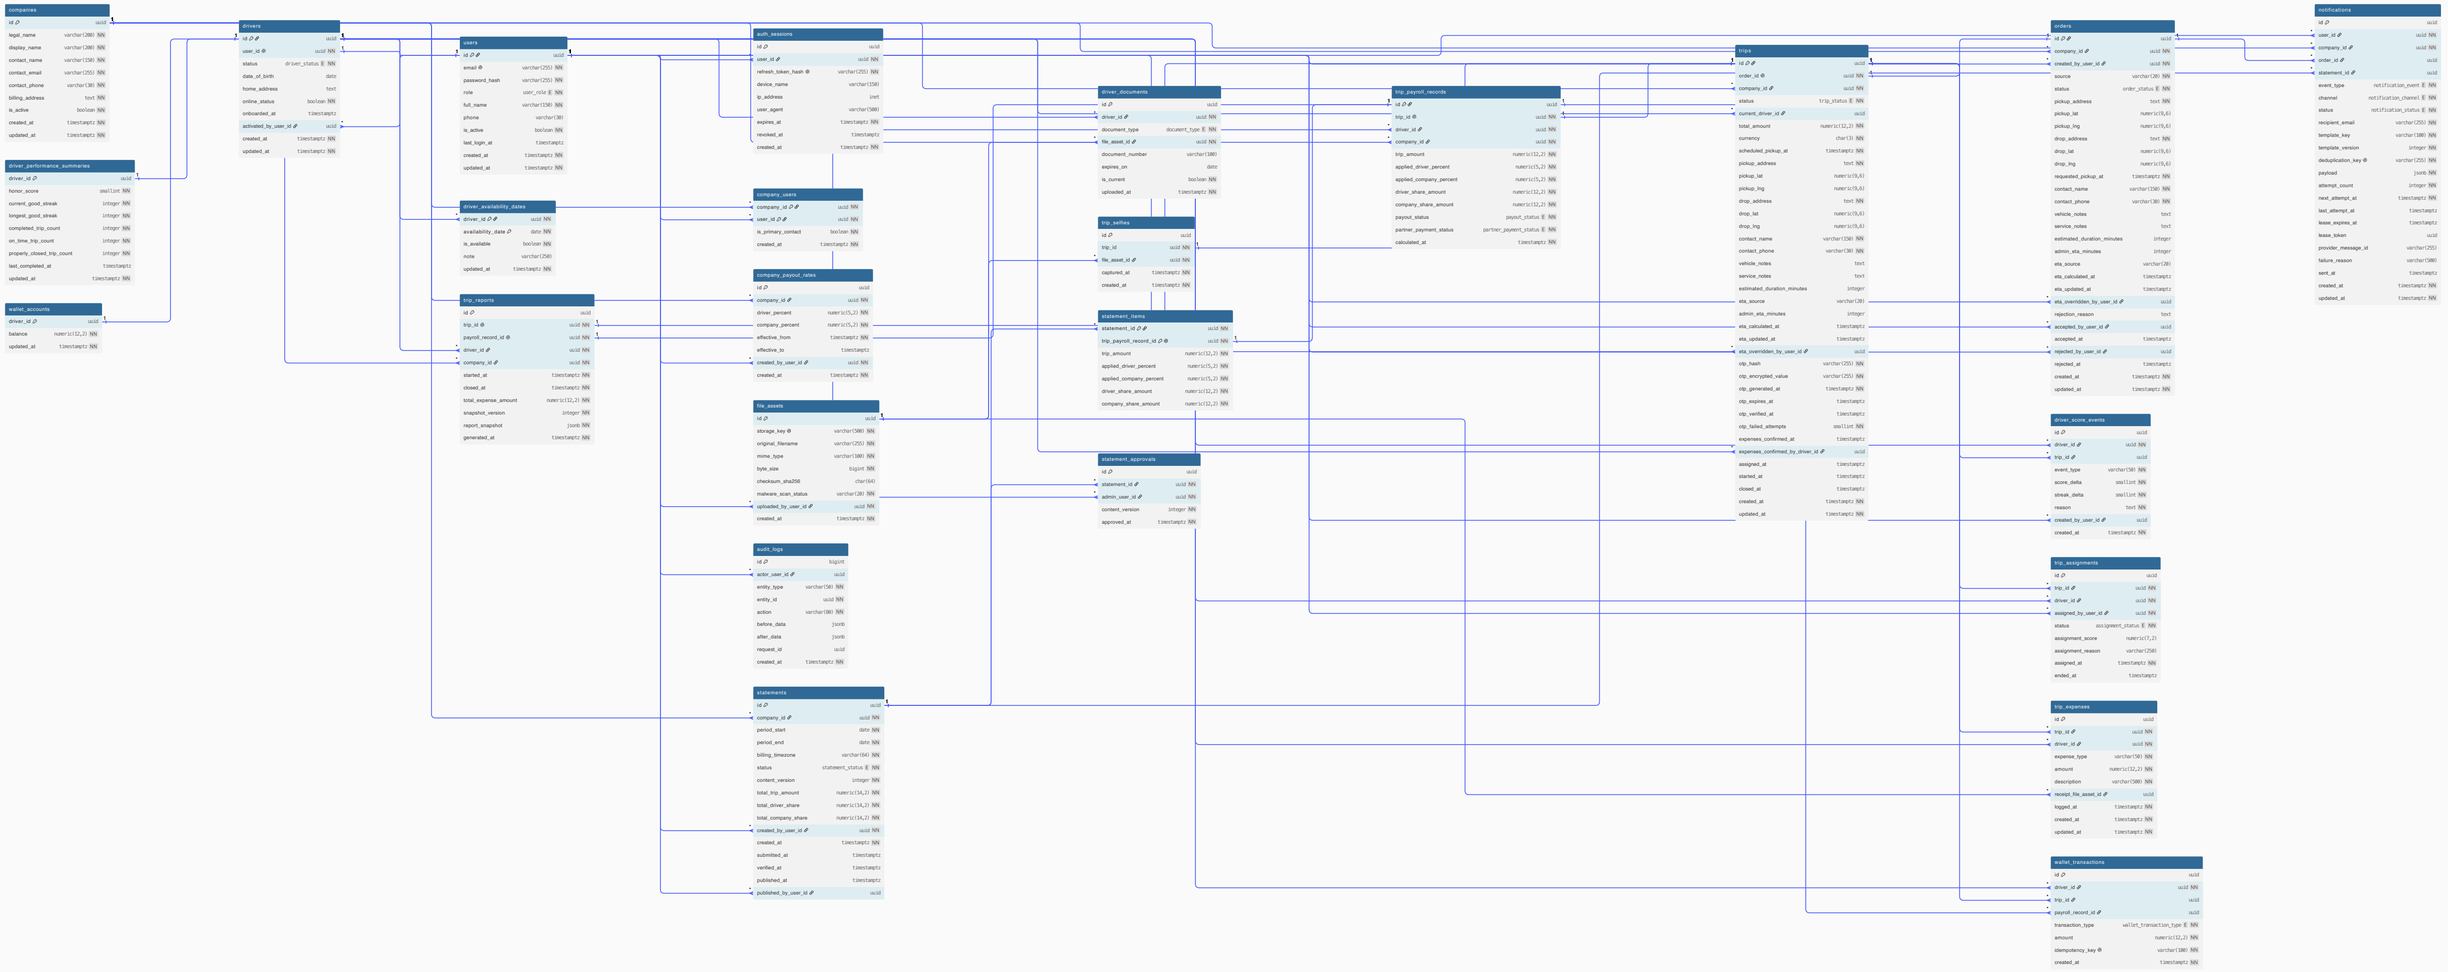

dbdiagram.io

Core relationships and lifecycle

Overview of required product entities; full field definitions and all foreign keys follow.

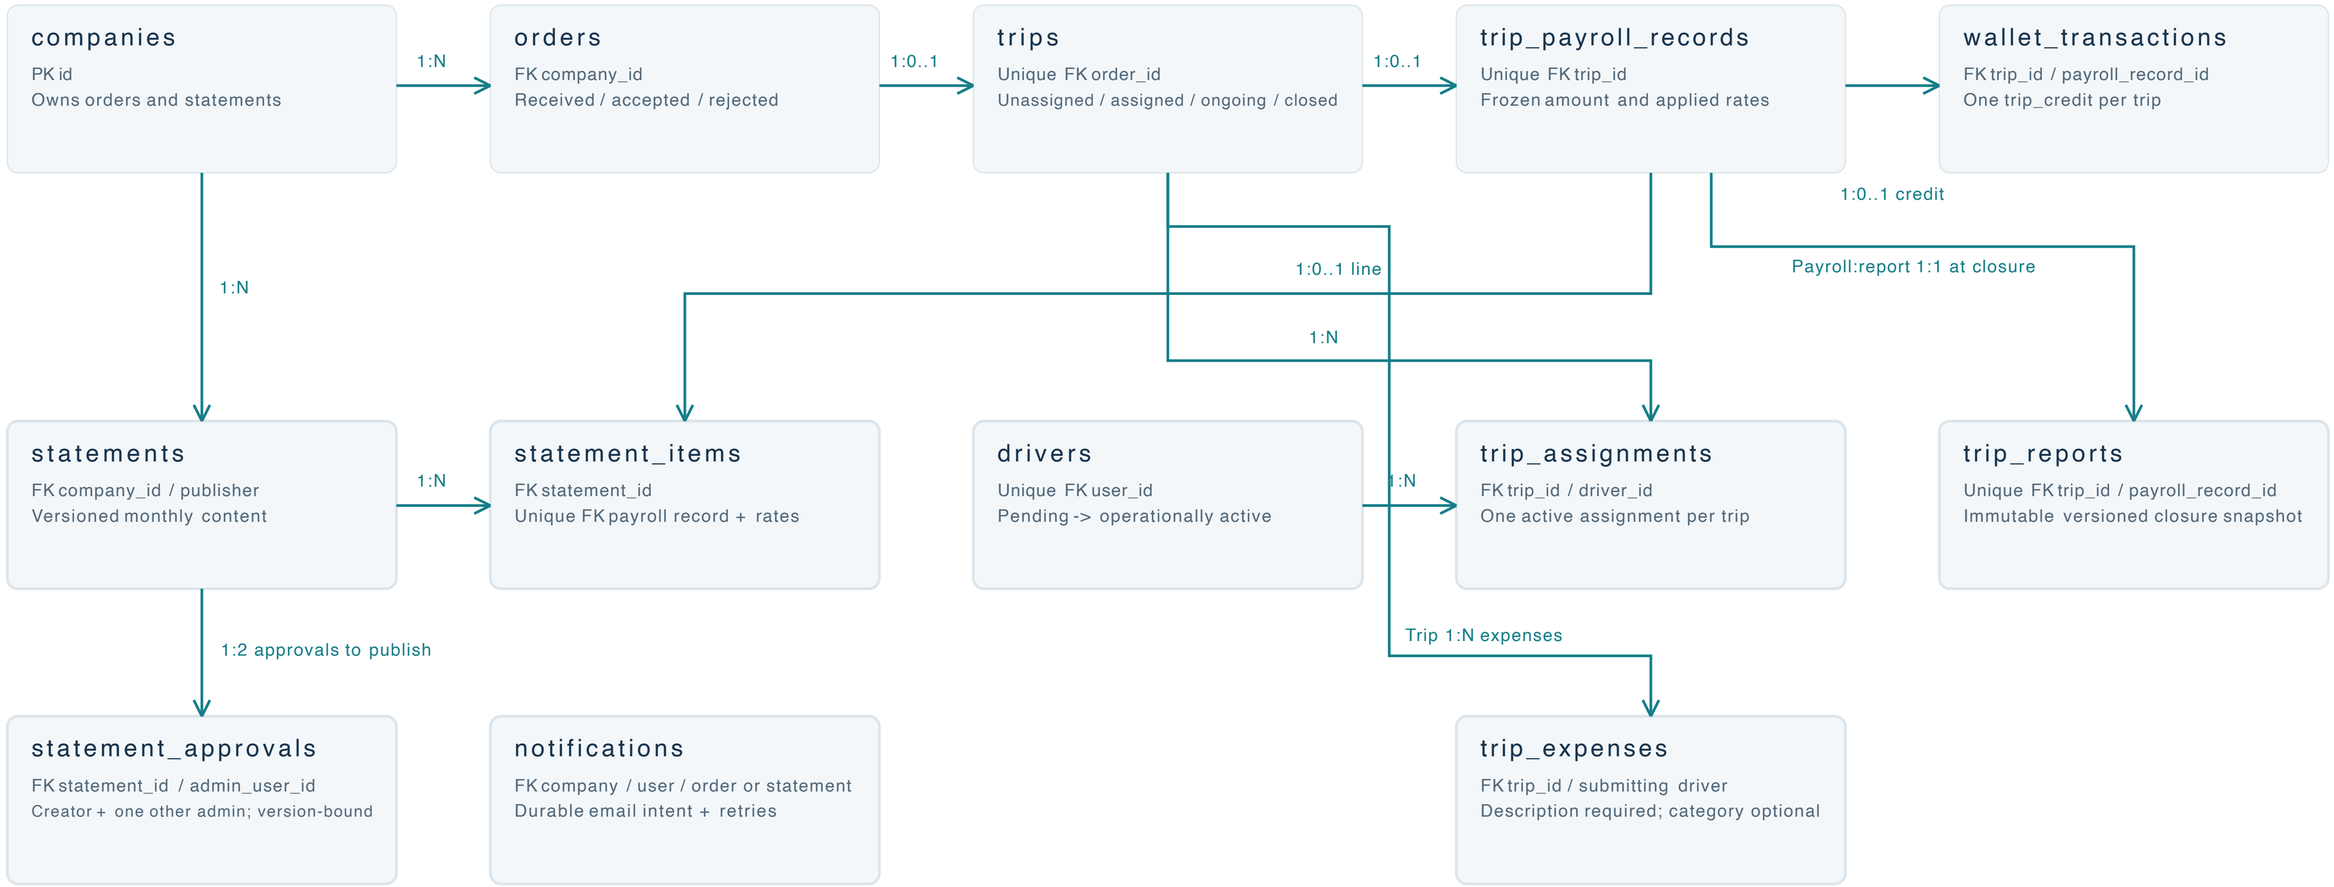

Additional identity, uploads, audit and optional score tables appear in the field sheets.

Arrows indicate parent-to-child cardinality; FK reference inventory gives exact columns.

Identity and company configuration

Private credentials, tenant membership and company payout-rate history.

PK = primary key UQ = unique NN = required NULL = optional FK = foreign key (exact targets in reference inventory)

users

id	uuid	PK NN	
email	varchar(255)	UQ NN	
password_hash	varchar(255)	NN	
role	user_role	NN	
full_name	varchar(150)	NN	
phone	varchar(30)	NULL	
is_active	boolean	NN	
last_login_at	timestamptz	NULL	
created_at	timestamptz	NN	
updated_at	timestamptz	NN	

companies

id	uuid	PK NN	
legal_name	varchar(200)	NN	
display_name	varchar(200)	NN	
contact_name	varchar(150)	NN	
contact_email	varchar(255)	NN	
contact_phone	varchar(30)	NN	
billing_address	text	NN	
is_active	boolean	NN	
created_at	timestamptz	NN	
updated_at	timestamptz	NN	

company_users

company_id	uuid	PK NN	FK
user_id	uuid	PK NN	FK
is_primary_contact	boolean	NN	
created_at	timestamptz	NN	

auth_sessions

id	uuid	PK NN	
user_id	uuid	NN	FK
refresh_token_hash	varchar(255)	UQ NN	
device_name	varchar(150)	NULL	
ip_address	inet	NULL	
user_agent	varchar(500)	NULL	
expires_at	timestamptz	NN	
revoked_at	timestamptz	NULL	
created_at	timestamptz	NN	

company_payout_rates

id	uuid	PK NN	
company_id	uuid	NN	FK
driver_percent	numeric(5,2)	NN	
company_percent	numeric(5,2)	NN	
effective_from	timestamptz	NN	
effective_to	timestamptz	NULL	
created_by_user_id	uuid	NN	FK
created_at	timestamptz	NN	

Driver onboarding and secure assets

Activation is operational; availability is separate. Score tables are optional BASAPextensions.

PK = primary key UQ = unique NN = required NULL = optional FK = foreign key (exact targets in reference inventory)

drivers

id	uuid	PK NN	
user_id	uuid	UQ NN	FK
status	driver_status	NN	
date_of_birth	date	NULL	
home_address	text	NULL	
online_status	boolean	NN	
onboarded_at	timestamptz	NULL	
activated_by_user_id	uuid	NULL	FK
created_at	timestamptz	NN	
updated_at	timestamptz	NN	

driver_availability_dates

driver_id	uuid	PK NN	FK
availability_date	date	PK NN	
is_available	boolean	NN	
note	varchar(250)	NULL	
updated_at	timestamptz	NN	

file_assets

id	uuid	PK NN	
storage_key	varchar(500)	UQ NN	
original_filename	varchar(255)	NN	
mime_type	varchar(100)	NN	
byte_size	bigint	NN	
checksum_sha256	char(64)	NULL	
malware_scan_status	varchar(20)	NN	
uploaded_by_user_id	uuid	NN	FK
created_at	timestamptz	NN	

driver_documents

id	uuid	PK NN	
driver_id	uuid	NN	FK
document_type	document_type	NN	
file_asset_id	uuid	NN	FK
document_number	varchar(100)	NULL	
expires_on	date	NULL	
is_current	boolean	NN	
uploaded_at	timestamptz	NN	

driver_performance_summaries

driver_id	uuid	PK NN	FK
honor_score	smallint	NN	
current_good_streak	integer	NN	
longest_good_streak	integer	NN	
completed_trip_count	integer	NN	
on_time_trip_count	integer	NN	
properly_closed_trip_count	integer	NN	
last_completed_at	timestamptz	NULL	
updated_at	timestamptz	NN	

driver_score_events

id	uuid	PK NN	
driver_id	uuid	NN	FK
trip_id	uuid	NULL	FK
event_type	varchar(50)	NN	
score_delta	smallint	NN	
streak_delta	smallint	NN	
reason	text	NN	
created_by_user_id	uuid	NULL	FK
created_at	timestamptz	NN	

Orders, trips and dispatch

Order and trip duration fields share precedence rules; confirmation is invalidated by reassignment or expense mutation.

PK = primary key UQ = unique NN = required NULL = optional FK = foreign key (exact targets in reference inventory)

orders

id	uuid	PK NN	
company_id	uuid	NN	FK
created_by_user_id	uuid	NN	FK
source	varchar(20)	NN	
status	order_status	NN	
pickup_address	text	NN	
pickup_lat	numeric(9,6)	NULL	
pickup_lng	numeric(9,6)	NULL	
drop_address	text	NN	
drop_lat	numeric(9,6)	NULL	
drop_lng	numeric(9,6)	NULL	
requested_pickup_at	timestamptz	NN	
contact_name	varchar(150)	NN	
contact_phone	varchar(30)	NN	
vehicle_notes	text	NULL	
service_notes	text	NULL	
estimated_duration_minutes	integer	NULL	
admin_eta_minutes	integer	NULL	
eta_source	varchar(20)	NULL	
eta_calculated_at	timestamptz	NULL	
eta_updated_at	timestamptz	NULL	
eta_overridden_by_user_id	uuid	NULL	FK
rejection_reason	text	NULL	
accepted_by_user_id	uuid	NULL	FK
accepted_at	timestamptz	NULL	
rejected_by_user_id	uuid	NULL	FK
rejected_at	timestamptz	NULL	
created_at	timestamptz	NN	
updated_at	timestamptz	NN	

trips

id	uuid	PK NN	
order_id	uuid	UQ NN	FK
company_id	uuid	NN	FK
status	trip_status	NN	
current_driver_id	uuid	NULL	FK
total_amount	numeric(12,2)	NN	
currency	char(3)	NN	
scheduled_pickup_at	timestamptz	NN	
pickup_address	text	NN	
pickup_lat	numeric(9,6)	NULL	
pickup_lng	numeric(9,6)	NULL	
drop_address	text	NN	
drop_lat	numeric(9,6)	NULL	
drop_lng	numeric(9,6)	NULL	
contact_name	varchar(150)	NN	
contact_phone	varchar(30)	NN	
vehicle_notes	text	NULL	
service_notes	text	NULL	
estimated_duration_minutes	integer	NULL	
eta_source	varchar(20)	NULL	
admin_eta_minutes	integer	NULL	
eta_calculated_at	timestamptz	NULL	
eta_updated_at	timestamptz	NULL	
eta_overridden_by_user_id	uuid	NULL	FK
otp_hash	varchar(255)	NN	
otp_encrypted_value	varchar(255)	NN	
otp_generated_at	timestamptz	NN	
otp_expires_at	timestamptz	NULL	
otp_verified_at	timestamptz	NULL	
otp_failed_attempts	smallint	NN	
expenses_confirmed_at	timestamptz	NULL	
expenses_confirmed_by_driver_id	uuid	NULL	FK
assigned_at	timestamptz	NULL	
started_at	timestamptz	NULL	
closed_at	timestamptz	NULL	
created_at	timestamptz	NN	
updated_at	timestamptz	NN	

trip_assignments

id	uuid	PK NN	
trip_id	uuid	NN	FK
driver_id	uuid	NN	FK
assigned_by_user_id	uuid	NN	FK
status	assignment_status	NN	
assignment_score	numeric(7,2)	NULL	
assignment_reason	varchar(250)	NULL	
assigned_at	timestamptz	NN	
ended_at	timestamptz	NULL	

trip_selfies

id	uuid	PK NN	
trip_id	uuid	NN	FK
file_asset_id	uuid	NN	FK
captured_at	timestamptz	NN	
created_at	timestamptz	NN	

Expenses, reports, payroll and wallet

Closure creates immutable report/payroll/credit atomically; JSONreport contract is versioned.

PK = primary key UQ = unique NN = required NULL = optional FK = foreign key (exact targets in reference inventory)

trip_expenses

id	uuid	PK NN	
trip_id	uuid	NN	FK
driver_id	uuid	NN	FK
expense_type	varchar(50)	NN	
amount	numeric(12,2)	NN	
description	varchar(500)	NN	
receipt_file_asset_id	uuid	NULL	FK
logged_at	timestamptz	NN	
created_at	timestamptz	NN	
updated_at	timestamptz	NN	

trip_reports

id	uuid	PK NN	
trip_id	uuid	UQ NN	FK
payroll_record_id	uuid	UQ NN	FK
driver_id	uuid	NN	FK
company_id	uuid	NN	FK
started_at	timestamptz	NN	
closed_at	timestamptz	NN	
total_expense_amount	numeric(12,2)	NN	
snapshot_version	integer	NN	
report_snapshot	jsonb	NN	
generated_at	timestamptz	NN	

trip_payroll_records

id	uuid	PK NN	
trip_id	uuid	UQ NN	FK
driver_id	uuid	NN	FK
company_id	uuid	NN	FK
trip_amount	numeric(12,2)	NN	
applied_driver_percent	numeric(5,2)	NN	
applied_company_percent	numeric(5,2)	NN	
driver_share_amount	numeric(12,2)	NN	
company_share_amount	numeric(12,2)	NN	
payout_status	payout_status	NN	
partner_payment_status	partner_payment_status	NN	
calculated_at	timestamptz	NN	

wallet_accounts

driver_id	uuid	PK NN	FK
balance	numeric(12,2)	NN	
updated_at	timestamptz	NN	

wallet_transactions

id	uuid	PK NN	
driver_id	uuid	NN	FK
trip_id	uuid	NULL	FK
payroll_record_id	uuid	NULL	FK
transaction_type	wallet_transaction_type	NN	
amount	numeric(12,2)	NN	
idempotency_key	varchar(100)	UQ NN	
created_at	timestamptz	NN	

Statements, notification intents and audit

Verification and publication are distinct from provider email acceptance; approval content is frozen.

PK = primary key UQ = unique NN = required NULL = optional FK = foreign key (exact targets in reference inventory)

statements

id	uuid	PK NN	
company_id	uuid	NN	FK
period_start	date	NN	
period_end	date	NN	
billing_timezone	varchar(64)	NN	
status	statement_status	NN	
content_version	integer	NN	
total_trip_amount	numeric(14,2)	NN	
total_driver_share	numeric(14,2)	NN	
total_company_share	numeric(14,2)	NN	
created_by_user_id	uuid	NN	FK
created_at	timestamptz	NN	
submitted_at	timestamptz	NULL	
verified_at	timestamptz	NULL	
published_at	timestamptz	NULL	
published_by_user_id	uuid	NULL	FK

statement_approvals

id	uuid	PK NN	
statement_id	uuid	NN	FK
admin_user_id	uuid	NN	FK
content_version	integer	NN	
approved_at	timestamptz	NN	

notifications

id	uuid	PK NN	
user_id	uuid	NN	FK
company_id	uuid	NN	FK
order_id	uuid	NULL	FK
statement_id	uuid	NULL	FK
event_type	notification_event	NN	
channel	notification_channel	NN	
status	notification_status	NN	
recipient_email	varchar(255)	NN	
template_key	varchar(100)	NN	
template_version	integer	NN	
deduplication_key	varchar(255)	UQ NN	
payload	jsonb	NN	
attempt_count	integer	NN	
next_attempt_at	timestamptz	NN	
last_attempt_at	timestamptz	NULL	
lease_expires_at	timestamptz	NULL	
lease_token	uuid	NULL	
provider_message_id	varchar(255)	NULL	
failure_reason	varchar(500)	NULL	
sent_at	timestamptz	NULL	
created_at	timestamptz	NN	
updated_at	timestamptz	NN	

statement_items

statement_id	uuid	PK NN	FK
trip_payroll_record_id	uuid	PK UQ NN	FK
trip_amount	numeric(12,2)	NN	
applied_driver_percent	numeric(5,2)	NN	
applied_company_percent	numeric(5,2)	NN	
driver_share_amount	numeric(12,2)	NN	
company_share_amount	numeric(12,2)	NN	

audit_logs

id	bigint	PK NN	
actor_user_id	uuid	NULL	FK
entity_type	varchar(50)	NN	
entity_id	uuid	NN	
action	varchar(80)	NN	
before_data	jsonb	NULL	
after_data	jsonb	NULL	
request_id	uuid	NULL	
created_at	timestamptz	NN	

Foreign-key reference inventory

All relationships from hired.dbml. NULL describes whether the child FK can be absent; unique child FKs are one-to-one.

CHILD FIELD	PARENT FIELD	CARDINALITY
company_users.company_id	companies.id	1:N
company_users.user_id	users.id	1:N
auth_sessions.user_id	users.id	1:N
company_payout_rates.company_id	companies.id	1:N
company_payout_rates.created_by_user_id	users.id	1:N
drivers.user_id	users.id	1:0..1
drivers.activated_by_user_id	users.id	1:N / NULL
file_assets.uploaded_by_user_id	users.id	1:N
driver_documents.driver_id	drivers.id	1:N
driver_documents.file_asset_id	file_assets.id	1:N
driver_availability_dates.driver_id	drivers.id	1:N
driver_performance_summaries.driver_id	drivers.id	1:0..1
driver_score_events.driver_id	drivers.id	1:N
driver_score_events.trip_id	trips.id	1:N / NULL
driver_score_events.created_by_user_id	users.id	1:N / NULL
orders.company_id	companies.id	1:N
orders.created_by_user_id	users.id	1:N
orders.accepted_by_user_id	users.id	1:N / NULL
orders.rejected_by_user_id	users.id	1:N / NULL
orders.eta_overridden_by_user_id	users.id	1:N / NULL
trips.order_id	orders.id	1:0..1
trips.company_id	companies.id	1:N
trips.current_driver_id	drivers.id	1:N / NULL
trips.eta_overridden_by_user_id	users.id	1:N / NULL
trips.expenses_confirmed_by_driver_id	drivers.id	1:N / NULL
trip_assignments.trip_id	trips.id	1:N
trip_assignments.driver_id	drivers.id	1:N
trip_assignments.assigned_by_user_id	users.id	1:N

CHILD FIELD	PARENT FIELD	CARDINALITY
trip_selfies.trip_id	trips.id	1:0..1
trip_selfies.file_asset_id	file_assets.id	1:N
trip_expenses.trip_id	trips.id	1:N
trip_expenses.driver_id	drivers.id	1:N
trip_expenses.receipt_file_asset_id	file_assets.id	1:N / NULL
trip_reports.trip_id	trips.id	1:0..1
trip_reports.driver_id	drivers.id	1:N
trip_reports.company_id	companies.id	1:N
trip_reports.payroll_record_id	trip_payroll_records.id	1:0..1
trip_payroll_records.trip_id	trips.id	1:0..1
trip_payroll_records.driver_id	drivers.id	1:N
trip_payroll_records.company_id	companies.id	1:N
wallet_accounts.driver_id	drivers.id	1:0..1
wallet_transactions.driver_id	drivers.id	1:N
wallet_transactions.trip_id	trips.id	1:N / NULL
wallet_transactions.payroll_record_id	trip_payroll_records.id	1:N / NULL
statements.company_id	companies.id	1:N
statements.created_by_user_id	users.id	1:N
statements.published_by_user_id	users.id	1:N / NULL
statement_items.statement_id	statements.id	1:N
statement_items.trip_payroll_record_id	trip_payroll_records.id	1:0..1
statement_approvals.statement_id	statements.id	1:N
statement_approvals.admin_user_id	users.id	1:N
notifications.user_id	users.id	1:N
notifications.company_id	companies.id	1:N
notifications.order_id	orders.id	1:N / NULL
notifications.statement_id	statements.id	1:N / NULL
audit_logs.actor_user_id	users.id	1:N / NULL

Status enums and implementation boundaries

Enum values and integrity notes; additional extension states are not Phase 1 product requirements.

user_role
admin | partner | driver

order_status
received | accepted | rejected

assignment_status
active | replaced | completed | cancelled

statement_status
draft | pending_verification | verified | published | void

payout_status
pending | credited | reversed

notification_channel
email | push | in_app

notification_event
order_accepted | order_rejected | statement_published

driver_status
pending | active | inactive | suspended

trip_status
unassigned | assigned | ongoing | closed

document_type
driving_license | aadhar | pan | pcc

wallet_transaction_type
trip_credit | adjustment | reversal

partner_payment_status
unpaid | settled | disputed

notification_status
pending | processing | sent | failed

Publication requires creator + one other admin approving the same frozen content version.
Partial uniqueness: one active assignment, one current document per type, one trip credit.
JSONSchema validates report shape; locked services also reconcile IDs, ownership, arithmetic and timestamps.
CHECKconstraints, triggers and service rules are proposed in indexing-strategy.md; DBML notes do not execute them.
Reserved extensions include statement voiding, monetary adjustments/reversals, push/in-app notices and driver scoring.
Source: github.com/shahid123s/buildathon-resources/blob/main/hire_d_prd_doc.md (v0.2; unpinned main).