
Core relationships and lifecycle

Selected declared foreign keys; every table and column follows on pages 2-6, all 56 references on page 7, enums on page 8.

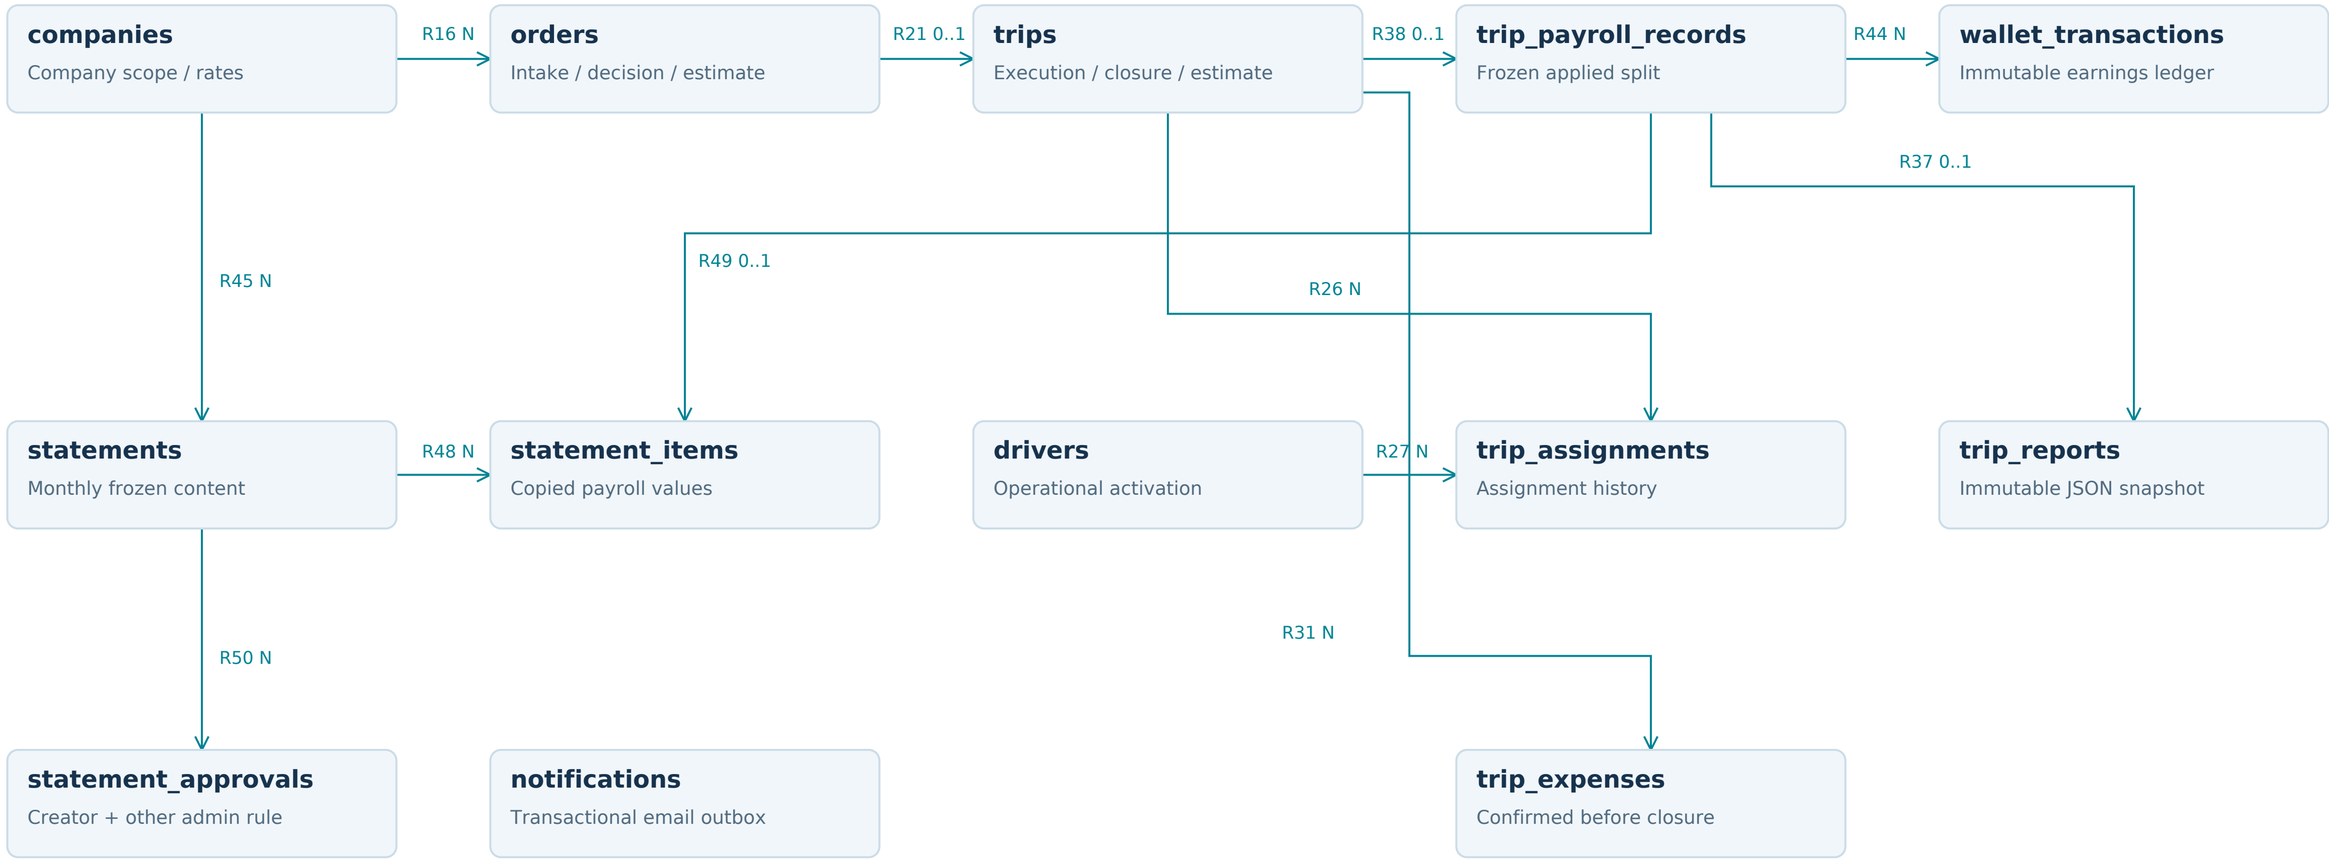

Arrows: parent to child. Rxx refers to page 7; N/0..1 is children per parent. No parent is required to have a child. Crossings do not join.

Financial closure and applicable outbox intent commit together; email is sent after commit. Additional integrity rules live in the database guides.

Identity and company configuration

Accounts, private sessions, tenant membership and company payout-rate history.

PK primary key | UQ single-column unique | NN required | NULL optional | FK Rxx exact target on page 7 | Green rows: estimate fields

users

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
email	varchar(255)	UQ NN
password_hash	varchar(255)	NN
role	user_role	NN
full_name	varchar(150)	NN
phone	varchar(30)	NULL
is_active	boolean	NN
last_login_at	timestamptz	NULL
created_at	timestamptz	NN
updated_at	timestamptz	NN

Defaults: is_active=true

companies

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
legal_name	varchar(200)	NN
display_name	varchar(200)	NN
contact_name	varchar(150)	NN
contact_email	varchar(255)	NN
contact_phone	varchar(30)	NN
billing_address	text	NN
is_active	boolean	NN
created_at	timestamptz	NN
updated_at	timestamptz	NN

Defaults: is_active=true

company_users

COLUMN	POSTGRESQL TYPE	KEY / NULL
company_id	uuid	PK NN FK R01
user_id	uuid	PK NN FK R02
is_primary_contact	boolean	NN
created_at	timestamptz	NN

Defaults: is_primary_contact=false
Composite PK: (company_id, user_id)

auth_sessions

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
user_id	uuid	NN FK R03
refresh_token_hash	varchar(255)	UQ NN
device_name	varchar(150)	NULL
ip_address	inet	NULL
user_agent	varchar(500)	NULL
expires_at	timestamptz	NN
revoked_at	timestamptz	NULL
created_at	timestamptz	NN

Index: (user_id, expires_at)

company_payout_rates

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
company_id	uuid	NN FK R04
driver_percent	numeric(5,2)	NN
company_percent	numeric(5,2)	NN
effective_from	timestamptz	NN
effective_to	timestamptz	NULL
created_by_user_id	uuid	NN FK R05
created_at	timestamptz	NN

UQ index: (company_id, effective_from)

Driver onboarding and secure assets

Operational activation is separate from availability. Scoring records remain optional design extensions.

PK primary key | UQ single-column unique | NN required | NULL optional | FK Rxx exact target on page 7 | Green rows: estimate fields

drivers

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
user_id	uuid	UQ NN FK R06
status	driver_status	NN
date_of_birth	date	NULL
home_address	text	NULL
online_status	boolean	NN
onboarded_at	timestamptz	NULL
activated_by_user_id	uuid	NULL FK R07
created_at	timestamptz	NN
updated_at	timestamptz	NN

Defaults: status='pending'; online_status=false
Index: (status, created_at)

driver_availability_dates

COLUMN	POSTGRESQL TYPE	KEY / NULL
driver_id	uuid	PK NN FK R11
availability_date	date	PK NN
is_available	boolean	NN
note	varchar(250)	NULL
updated_at	timestamptz	NN

Composite PK: (driver_id, availability_date)

file_assets

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
storage_key	varchar(500)	UQ NN
original_filename	varchar(255)	NN
mime_type	varchar(100)	NN
byte_size	bigint	NN
checksum_sha256	char(64)	NULL
malware_scan_status	varchar(20)	NN
uploaded_by_user_id	uuid	NN FK R08
created_at	timestamptz	NN

Defaults: malware_scan_status='pending'

driver_documents

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
driver_id	uuid	NN FK R09
document_type	document_type	NN
file_asset_id	uuid	NN FK R10
document_number	varchar(100)	NULL
expires_on	date	NULL
is_current	boolean	NN
uploaded_at	timestamptz	NN

Defaults: is_current=true
Index: (driver_id, document_type, is_current)

driver_performance_summaries

COLUMN	POSTGRESQL TYPE	KEY / NULL
driver_id	uuid	PK NN FK R12
honor_score	smallint	NN
current_good_streak	integer	NN
longest_good_streak	integer	NN
completed_trip_count	integer	NN
on_time_trip_count	integer	NN
properly_closed_trip_count	integer	NN
last_completed_at	timestamptz	NULL
updated_at	timestamptz	NN

Defaults: honor_score=100; current_good_streak=0; longest_good_streak=0; completed_trip_count=0; on_time_trip_count=0; properly_closed_trip_count=0

driver_score_events

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
driver_id	uuid	NN FK R13
trip_id	uuid	NULL FK R14
event_type	varchar(50)	NN
score_delta	smallint	NN
streak_delta	smallint	NN
reason	text	NN
created_by_user_id	uuid	NULL FK R15
created_at	timestamptz	NN

Defaults: streak_delta=0
Index: (driver_id, created_at)
Index: (trip_id)

Orders, trips and dispatch

Green rows show the current estimate inputs, automatic source/evidence and admin override fields.

PK primary key | UQ single-column unique | NN required | NULL optional | FK Rxx exact target on page 7 | Green rows: estimate fields

orders

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
company_id	uuid	NN FK R16
created_by_user_id	uuid	NN FK R17
source	varchar(20)	NN
status	order_status	NN
pickup_address	text	NN
pickup_lat	numeric(9,6)	NULL
pickup_lng	numeric(9,6)	NULL
drop_address	text	NN
drop_lat	numeric(9,6)	NULL
drop_lng	numeric(9,6)	NULL
requested_pickup_at	timestamptz	NN
contact_name	varchar(150)	NN
contact_phone	varchar(30)	NN
vehicle_notes	text	NULL
service_notes	text	NULL
route_distance_km	numeric(10,2)	NULL
estimated_duration_minutes	integer	NULL
estimated_duration_source	varchar(20)	NULL
estimate_average_speed_kmh	numeric(6,2)	NULL
estimate_policy_version	varchar(50)	NULL
admin_eta_minutes	integer	NULL
eta_source	varchar(20)	NULL
eta_calculated_at	timestamptz	NULL
eta_updated_at	timestamptz	NULL
eta_overridden_by_user_id	uuid	NULL FK R20
rejection_reason	text	NULL
accepted_by_user_id	uuid	NULL FK R18
accepted_at	timestamptz	NULL
rejected_by_user_id	uuid	NULL FK R19
rejected_at	timestamptz	NULL
created_at	timestamptz	NN
updated_at	timestamptz	NN

Defaults: status='received'
Index: (company_id, created_at)
Index: (status, created_at)
Index: (requested_pickup_at)

trips

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
order_id	uuid	UQ NN FK R21
company_id	uuid	NN FK R22
status	trip_status	NN
current_driver_id	uuid	NULL FK R23
total_amount	numeric(12,2)	NN
currency	char(3)	NN
scheduled_pickup_at	timestamptz	NN
pickup_address	text	NN
pickup_lat	numeric(9,6)	NULL
pickup_lng	numeric(9,6)	NULL
drop_address	text	NN
drop_lat	numeric(9,6)	NULL
drop_lng	numeric(9,6)	NULL
contact_name	varchar(150)	NN
contact_phone	varchar(30)	NN
vehicle_notes	text	NULL
service_notes	text	NULL
route_distance_km	numeric(10,2)	NULL
estimated_duration_minutes	integer	NULL
estimated_duration_source	varchar(20)	NULL
estimate_average_speed_kmh	numeric(6,2)	NULL
estimate_policy_version	varchar(50)	NULL
eta_source	varchar(20)	NULL
admin_eta_minutes	integer	NULL
eta_calculated_at	timestamptz	NULL
eta_updated_at	timestamptz	NULL
eta_overridden_by_user_id	uuid	NULL FK R24
otp_hash	varchar(255)	NN
otp_encrypted_value	varchar(255)	NN
otp_generated_at	timestamptz	NN
otp_expires_at	timestamptz	NULL
otp_verified_at	timestamptz	NULL
otp_failed_attempts	smallint	NN
expenses_confirmed_at	timestamptz	NULL
expenses_confirmed_by_driver_id	uuid	NULL FK R25
assigned_at	timestamptz	NULL
started_at	timestamptz	NULL
closed_at	timestamptz	NULL
created_at	timestamptz	NN
updated_at	timestamptz	NN

Defaults: status='unassigned'; currency='INR'; otp_failed_attempts=0
Index: (status, scheduled_pickup_at)
Index: (current_driver_id, status)
Index: (company_id, closed_at)
Index: (closed_at)

trip_assignments

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
trip_id	uuid	NN FK R26
driver_id	uuid	NN FK R27
assigned_by_user_id	uuid	NN FK R28
status	assignment_status	NN
assignment_score	numeric(7,2)	NULL
assignment_reason	varchar(250)	NULL
assigned_at	timestamptz	NN
ended_at	timestamptz	NULL

Defaults: status='active'
Index: (trip_id, status)
Index: (driver_id, status, assigned_at)

trip_selfies

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
trip_id	uuid	NN FK R29
file_asset_id	uuid	NN FK R30
captured_at	timestamptz	NN
created_at	timestamptz	NN

UQ index: (trip_id)

Expenses, reports, payroll and wallet

Successful closure persists payroll, report, credit and balance in one PostgreSQL transaction.

PK primary key | UQ single-column unique | NN required | NULL optional | FK Rxx exact target on page 7 | Green rows: estimate fields

trip_expenses

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
trip_id	uuid	NN FK R31
driver_id	uuid	NN FK R32
expense_type	varchar(50)	NN
amount	numeric(12,2)	NN
description	varchar(500)	NN
receipt_file_asset_id	uuid	NULL FK R33
logged_at	timestamptz	NN
created_at	timestamptz	NN
updated_at	timestamptz	NN

Defaults: expense_type='other'
Index: (trip_id, logged_at)

trip_reports

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
trip_id	uuid	UQ NN FK R34
payroll_record_id	uuid	UQ NN FK R37
driver_id	uuid	NN FK R35
company_id	uuid	NN FK R36
started_at	timestamptz	NN
closed_at	timestamptz	NN
total_expense_amount	numeric(12,2)	NN
snapshot_version	integer	NN
report_snapshot	jsonb	NN
generated_at	timestamptz	NN

Defaults: total_expense_amount=0; snapshot_version=1

trip_payroll_records

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
trip_id	uuid	UQ NN FK R38
driver_id	uuid	NN FK R39
company_id	uuid	NN FK R40
trip_amount	numeric(12,2)	NN
applied_driver_percent	numeric(5,2)	NN
applied_company_percent	numeric(5,2)	NN
driver_share_amount	numeric(12,2)	NN
company_share_amount	numeric(12,2)	NN
payout_status	payout_status	NN
partner_payment_status	partner_payment_status	NN
calculated_at	timestamptz	NN

Defaults: payout_status='pending'; partner_payment_status='unpaid'
Index: (company_id, calculated_at)
Index: (driver_id, calculated_at)

wallet_accounts

COLUMN	POSTGRESQL TYPE	KEY / NULL
driver_id	uuid	PK NN FK R41
balance	numeric(12,2)	NN
updated_at	timestamptz	NN

Defaults: balance=0

wallet_transactions

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
driver_id	uuid	NN FK R42
trip_id	uuid	NULL FK R43
payroll_record_id	uuid	NULL FK R44
transaction_type	wallet_transaction_type	NN
amount	numeric(12,2)	NN
idempotency_key	varchar(100)	UQ NN
created_at	timestamptz	NN

Index: (driver_id, created_at)
Index: (trip_id)

Statements, notification intents and audit

Frozen statement content, explicit approvals, transactional notification intents and sanitized audit history.

PK primary key | UQ single-column unique | NN required | NULL optional | FK Rxx exact target on page 7 | Green rows: estimate fields

statements

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
company_id	uuid	NN FK R45
period_start	date	NN
period_end	date	NN
billing_timezone	varchar(64)	NN
status	statement_status	NN
content_version	integer	NN
total_trip_amount	numeric(14,2)	NN
total_driver_share	numeric(14,2)	NN
total_company_share	numeric(14,2)	NN
created_by_user_id	uuid	NN FK R46
created_at	timestamptz	NN
submitted_at	timestamptz	NULL
verified_at	timestamptz	NULL
published_at	timestamptz	NULL
published_by_user_id	uuid	NULL FK R47

Defaults: billing_timezone='Asia/Kolkata'; status='draft'; content_version=1; total_trip_amount=0; total_driver_share=0; total_company_share=0
UQ index: (company_id, period_start)
Index: (status, created_at)

notifications

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
user_id	uuid	NN FK R52
company_id	uuid	NN FK R53
order_id	uuid	NULL FK R54
statement_id	uuid	NULL FK R55
event_type	notification_event	NN
channel	notification_channel	NN
status	notification_status	NN
recipient_email	varchar(255)	NN
template_key	varchar(100)	NN
template_version	integer	NN
deduplication_key	varchar(255)	UQ NN
payload	jsonb	NN
attempt_count	integer	NN
next_attempt_at	timestamptz	NN
last_attempt_at	timestamptz	NULL
lease_expires_at	timestamptz	NULL
lease_token	uuid	NULL
provider_message_id	varchar(255)	NULL
failure_reason	varchar(500)	NULL
sent_at	timestamptz	NULL
created_at	timestamptz	NN
updated_at	timestamptz	NN

Defaults: status='pending'; template_version=1; attempt_count=0
Index: (user_id, created_at)
Index: (company_id, created_at)
Index: (status, next_attempt_at)

statement_items

COLUMN	POSTGRESQL TYPE	KEY / NULL
statement_id	uuid	PK NN FK R48
trip_payroll_record_id	uuid	PK NN FK R49
trip_amount	numeric(12,2)	NN
applied_driver_percent	numeric(5,2)	NN
applied_company_percent	numeric(5,2)	NN
driver_share_amount	numeric(12,2)	NN
company_share_amount	numeric(12,2)	NN

Composite PK: (statement_id, trip_payroll_record_id)

statement_approvals

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	uuid	PK NN
statement_id	uuid	NN FK R50
admin_user_id	uuid	NN FK R51
content_version	integer	NN
approved_at	timestamptz	NN

UQ index: (statement_id, admin_user_id)

audit_logs

COLUMN	POSTGRESQL TYPE	KEY / NULL
id	bigint	PK NN
actor_user_id	uuid	NULL FK R56
entity_type	varchar(50)	NN
entity_id	uuid	NN
action	varchar(80)	NN
before_data	jsonb	NULL
after_data	jsonb	NULL
request_id	uuid	NULL
created_at	timestamptz	NN

Index: (entity_type, entity_id, created_at)
Index: (actor_user_id, created_at)
Increment: id

Foreign-key reference inventory

Every declared Ref from hired.dbml, in source order. Unique child keys allow at most one child per parent; other children are many.

REF	CHILD / FOREIGN KEY	PARENT / REFERENCED KEY	DBML	CHILDREN / PARENT	FK NULL?
R01	company_users.company_id	companies.id	>	0..N	No
R02	company_users.user_id	users.id	>	0..N	No
R03	auth_sessions.user_id	users.id	>	0..N	No
R04	company_payout_rates.company_id	companies.id	>	0..N	No
R05	company_payout_rates.created_by_user_id	users.id	>	0..N	No
R06	drivers.user_id	users.id	-	0..1	No
R07	drivers.activated_by_user_id	users.id	>	0..N	Yes
R08	file_assets.uploaded_by_user_id	users.id	>	0..N	No
R09	driver_documents.driver_id	drivers.id	>	0..N	No
R10	driver_documents.file_asset_id	file_assets.id	>	0..N	No
R11	driver_availability_dates.driver_id	drivers.id	>	0..N	No
R12	driver_performance_summaries.driver_id	drivers.id	-	0..1	No
R13	driver_score_events.driver_id	drivers.id	>	0..N	No
R14	driver_score_events.trip_id	trips.id	>	0..N	Yes
R15	driver_score_events.created_by_user_id	users.id	>	0..N	Yes
R16	orders.company_id	companies.id	>	0..N	No
R17	orders.created_by_user_id	users.id	>	0..N	No
R18	orders.accepted_by_user_id	users.id	>	0..N	Yes
R19	orders.rejected_by_user_id	users.id	>	0..N	Yes
R20	orders.eta_overridden_by_user_id	users.id	>	0..N	Yes
R21	trips.order_id	orders.id	-	0..1	No
R22	trips.company_id	companies.id	>	0..N	No
R23	trips.current_driver_id	drivers.id	>	0..N	Yes
R24	trips.eta_overridden_by_user_id	users.id	>	0..N	Yes
R25	trips.expenses_confirmed_by_driver_id	drivers.id	>	0..N	Yes
R26	trip_assignments.trip_id	trips.id	>	0..N	No
R27	trip_assignments.driver_id	drivers.id	>	0..N	No
R28	trip_assignments.assigned_by_user_id	users.id	>	0..N	No
R29	trip_selfies.trip_id	trips.id	-	0..1	No
R30	trip_selfies.file_asset_id	file_assets.id	>	0..N	No
R31	trip_expenses.trip_id	trips.id	>	0..N	No
R32	trip_expenses.driver_id	drivers.id	>	0..N	No
R33	trip_expenses.receipt_file_asset_id	file_assets.id	>	0..N	Yes
R34	trip_reports.trip_id	trips.id	-	0..1	No
R35	trip_reports.driver_id	drivers.id	>	0..N	No
R36	trip_reports.company_id	companies.id	>	0..N	No
R37	trip_reports.payroll_record_id	trip_payroll_records.id	-	0..1	No
R38	trip_payroll_records.trip_id	trips.id	-	0..1	No
R39	trip_payroll_records.driver_id	drivers.id	>	0..N	No
R40	trip_payroll_records.company_id	companies.id	>	0..N	No
R41	wallet_accounts.driver_id	drivers.id	-	0..1	No
R42	wallet_transactions.driver_id	drivers.id	>	0..N	No
R43	wallet_transactions.trip_id	trips.id	>	0..N	Yes
R44	wallet_transactions.payroll_record_id	trip_payroll_records.id	>	0..N	Yes
R45	statements.company_id	companies.id	>	0..N	No
R46	statements.created_by_user_id	users.id	>	0..N	No
R47	statements.published_by_user_id	users.id	>	0..N	Yes
R48	statement_items.statement_id	statements.id	>	0..N	No
R49	statement_items.trip_payroll_record_id	trip_payroll_records.id	-	0..1	No
R50	statement_approvals.statement_id	statements.id	>	0..N	No
R51	statement_approvals.admin_user_id	users.id	>	0..N	No
R52	notifications.user_id	users.id	>	0..N	No
R53	notifications.company_id	companies.id	>	0..N	No
R54	notifications.order_id	orders.id	>	0..N	Yes
R55	notifications.statement_id	statements.id	>	0..N	Yes
R56	audit_logs.actor_user_id	users.id	>	0..N	Yes

Status enums and implementation boundaries

Exact enum types and values from hired.dbml. Extension states are preserved; their presence does not approve a Phase 1 workflow.

user_role
admin
partner
driver

driver_status
pending
active
inactive
suspended

order_status
received
accepted
rejected

trip_status
unassigned
assigned
ongoing
closed

assignment_status
active
replaced
completed
cancelled

document_type
driving_license
aadhar
pan
pcc

statement_status
draft
pending_verification
verified
published
void

wallet_transaction_type
trip_credit
adjustment
reversal

payout_status
pending
credited
reversed

partner_payment_status
unpaid
settled
disputed

notification_channel
email
push
in_app

notification_status
pending
processing
sent
failed

notification_event
order_accepted
order_rejected
statement_published

Integrity: CHECKs, partial uniqueness, immutable-record controls and lock ordering are specified in indexing-strategy.md and database-design.md; this PDF does not execute them.
Estimate rows are highlighted in orders and trips. Rough distance/speed estimates, admin overrides and unavailable states remain distinct; policy calibration is still DEC-32.
Optional scoring tables and reserved enum values remain design extensions. Durable HTTP replay, upload context and aggregate version mechanisms still need separate reviewed design.
Prisma adoption does not add or rename tables here. PostgreSQL remains authoritative; report JSON structure is separately defined in trip-report-snapshot.schema.json.